




50  
YEARS  
1969-2019

## GENERAL CATALOGUE

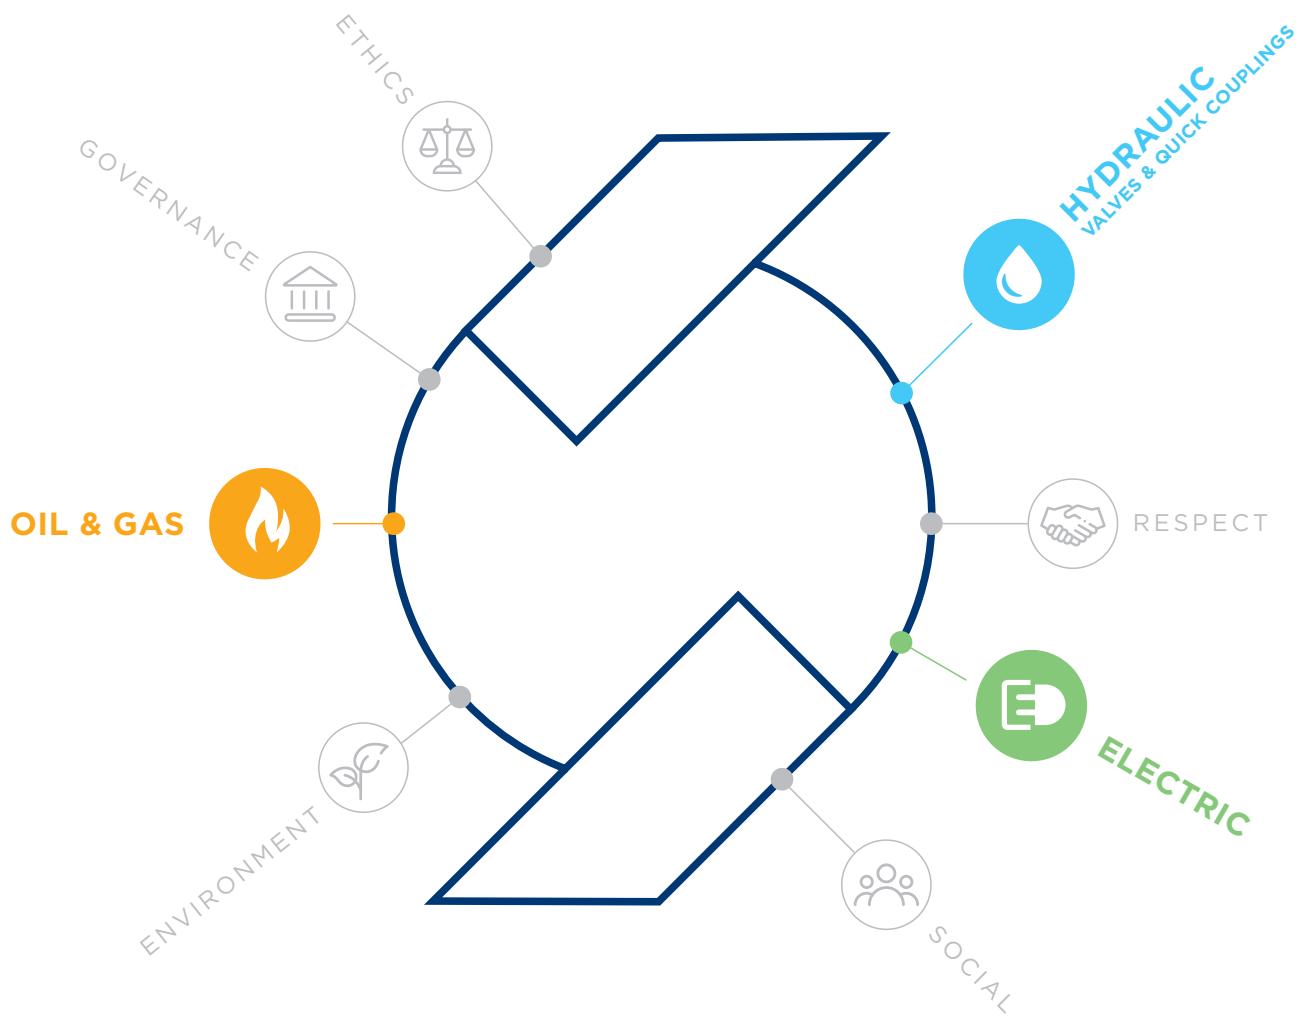

ITALIAN MANUFACTURER SINCE 1969





## COMPANY'S FOUNDATION

**GEMELS SPA** was founded in 1969 as a Company specialized in the designing and manufacturing of ball valves and quick couplings from 1/4" up to 42".

**GEMELS SPA** has become a worldwide leader in the industrial & hydraulic field and, since 2010, has started to focalize and to invest more and more also in the Oil & Gas field.

**GEMELS SPA** has also introduced into its range new products regarding Green Power application, as ELECTRIC MOTORS and new other forthcoming projects for the electrification of equipment and machines.

## WHERE WE ARE

**GEMELS SPA** is located in the middle of North Italy, less than 50 km from Milan.  
Address: Via Gambirasio, 20/22  
24069 Trescore Balneario  
(Bergamo) - ITALY

**GEMELS NORTH AMERICA INC**  
is located in Chicago, with office and warehouse supplying the American market.  
Address: 775 Dillon Drive, Wood Dale, IL 60191 USA


# HEADQUARTERS

**GEMELS SPA** covers more than 12.500 m<sup>2</sup>, between indoor and outdoor area.

## GEMELS DIVISION

### 1. QUALITY LAB AND CERTIFICATIONS

The quality department guarantees that the whole production follows all the required standards, performing rigorous tests before and after the assembly.

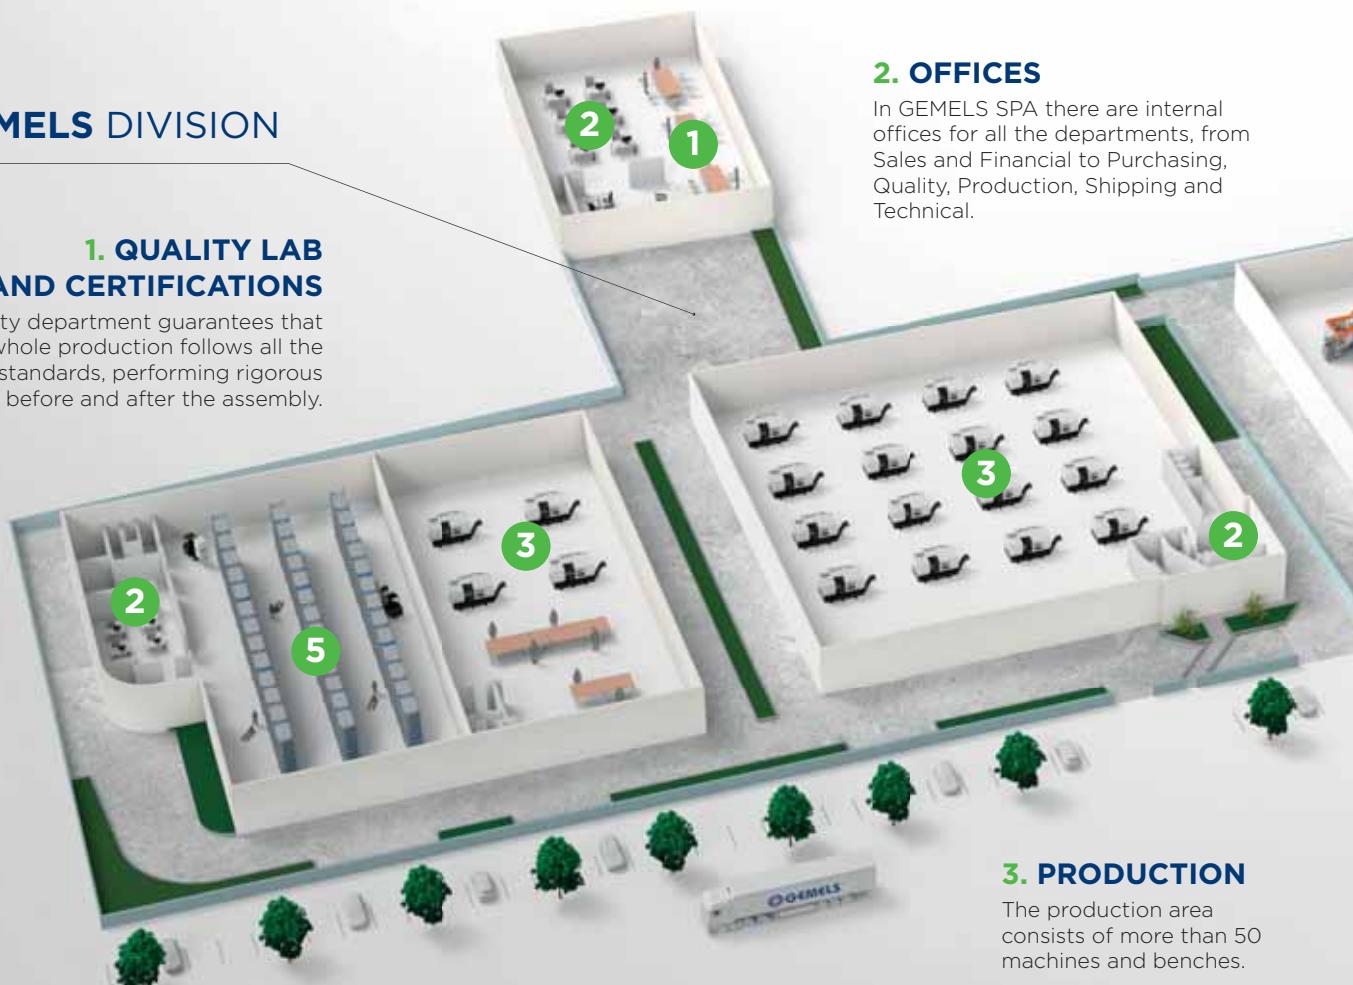


### 2. OFFICES

In GEMELS SPA there are internal offices for all the departments, from Sales and Financial to Purchasing, Quality, Production, Shipping and Technical.

### 3. PRODUCTION

The production area consists of more than 50 machines and benches.

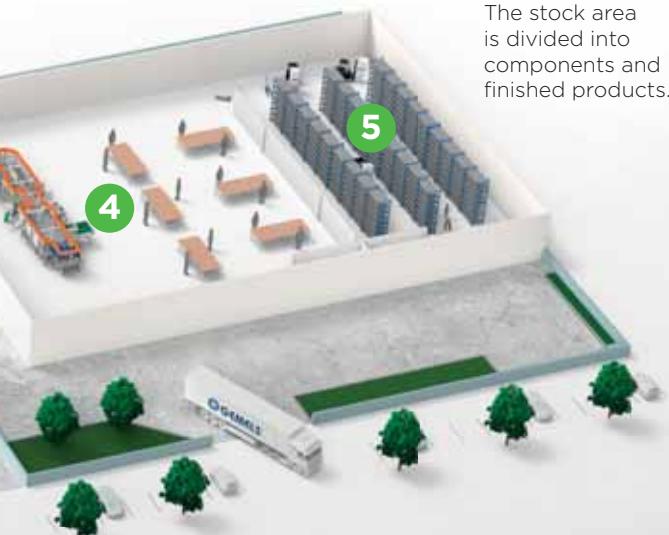

#### 4. ASSEMBLING

The assembling area includes manual and automatic lines, where valves are 100% tested.

#### 5. STOCK AND SHIPPING

The stock area is divided into components and finished products.

## OUR HISTORY

In 1969, in the center of Trescore Balneario, Angelo Facchinetti gave life to his "Officina Meccanica". In 1988 the Company changed its name in **GEMELS** and in the '90s the first ball valve model GE2 was realized. The first shipment abroad, in 1997, highlighted the first step of the internationalization process. In 2004 **GEMELS** bought two new buildings, next to the first one, to increase its production. In 2010 the Company made the first investments in the Oil&Gas market, obtaining API 6D Certification two years later. In 2015, becoming always more aware of health and safety themes, **GEMELS** obtained ISO 18001 and OHSAS 14001 Certifications. The first machine for the automatic assembly of GE valves was introduced in 2017. In 2018 **GEMELS** widened its product range by developing Quick Couplings. In 2020 the Company changed its business name from **GEMELS** to **GEMELS S.p.A.** and the first branch in USA, **Gemels North America Inc.** based in Chicago, was officially opened.



GEMELS SPA is not a Community for everybody. If you like impossible challenges, if you would like to become a champion and you are an honest person, you could be part of our reality.  
Our distinctive value is fully understood by those who has made a direct experience in GEMELS SPA.

# GLOBAL PRESENCE

## 100 COUNTRIES

**GEMELS SPA** has a strong global presence with a network of distributors and partners all over the world. Reaching almost 100 countries, the Company is able to guarantee the faster solution to all the customers across the five continents.



# PHILOSOPHY

**GEMELS SPA** finds its philosophy on being a Company completely different from the other ones in every aspect for its courage and honesty.

This philosophy is not based on the enrichment of the Company management, but on sharing it with each colleague, who work with passion looking for a continuous improvement, growth and perfection, and his/her family. The real success of

**GEMELS SPA** is what we inspire in our colleagues' lives, which becomes then their personal success too. We base our philosophy on a creative long-period idea, where women hold high-profile positions, generating a chain of values that reaches their children, who, once included in the Company's reality, will bring the learned culture. The value given to people that are part of our Community is essential: they are the one who make the Company. To fully understand **GEMELS** philosophy, which is completely out of the ordinary, as far as you try, is often difficult, almost impossible.



# SUSTAINABILITY

---

For **GEMELS SPA** sustainability is a priority: the Company always takes care of ESG themes (Environmental Social Governance).

**GEMELS SPA** supports the basics of the European Green Deal. This agreement, among its points, not only does it deal with the problem of climate change, but also it concerns workers and communities support, guaranteeing social protection and respect for human rights. Among the various aspects related to social issues, **GEMELS SPA** puts great emphasis on the topic of welfare, as well as on employee engagement, gender diversity, responsible and sustainable supply chain.



The Company values its people (PEOPLE FIRST): it has always adopted this approach, as people are the ones who make the Company. **GEMELS SPA** has always worked hard to spread a 'COMPANY CULTURE', both internally and externally, that gives value and defends people, protects their mental and physical health and promotes their development.

Another goal is the female quota, currently up to 40% of the colleagues.

**GEMELS SPA** philosophy follows the principles of TPS, based on lean production, 5S, pursuit of the excellence in quality and continuous improvements (kaizen).





**“ WHEN YOU WORK, REMIND: YOUR FAMILY IS WAITING FOR YOU AT HOME! ”**

## GEMELS safety


One of **GEMELS SPA** main focuses is the promotion and spread of a Safety Culture in the workplace. One of our mottos is: WHEN YOU WORK, REMIND: YOUR FAMILY IS WAITING FOR YOU AT HOME! In order to spread safety awareness to all the partners and colleagues, we have introduced some special labels on our equipment and machinery with the “**GEMELS SAFETY**” brand. These labels are printed internally by our quality and safety department. **GEMELS SPA** is ISO 45001 certified.

## GEMELS Supply Support Center

Regarding the supply chain, the Company is committed to increasing awareness of themes such as the transparency and honesty of relationships. Since 2014, **GEMELS SPA** has introduced a designated office with the aim of making continuous improvements to the quality of its products, thanks to a close collaboration between the suppliers and the Company: it is called GSSC (GEMELS Supply Support Center).

## GEMELS ENVIRONMENT

We are sensitive to the environmental issues and to the impact that production activities have on the environment and territory in terms of natural gas emissions, energy savings, green innovation, soil protection and biodiversity. **GEMELS SPA** is committed to inspiring its workers' environmental awareness by reducing the quantity of waste produced, by optimizing recycling and by promoting the reduction of energy consumption thanks to our production cycles efficiency. The Company dedicates few hours each year to environmental and social sustainability, supporting different local and national charitable organizations. **GEMELS SPA** is ISO 14001 certified.

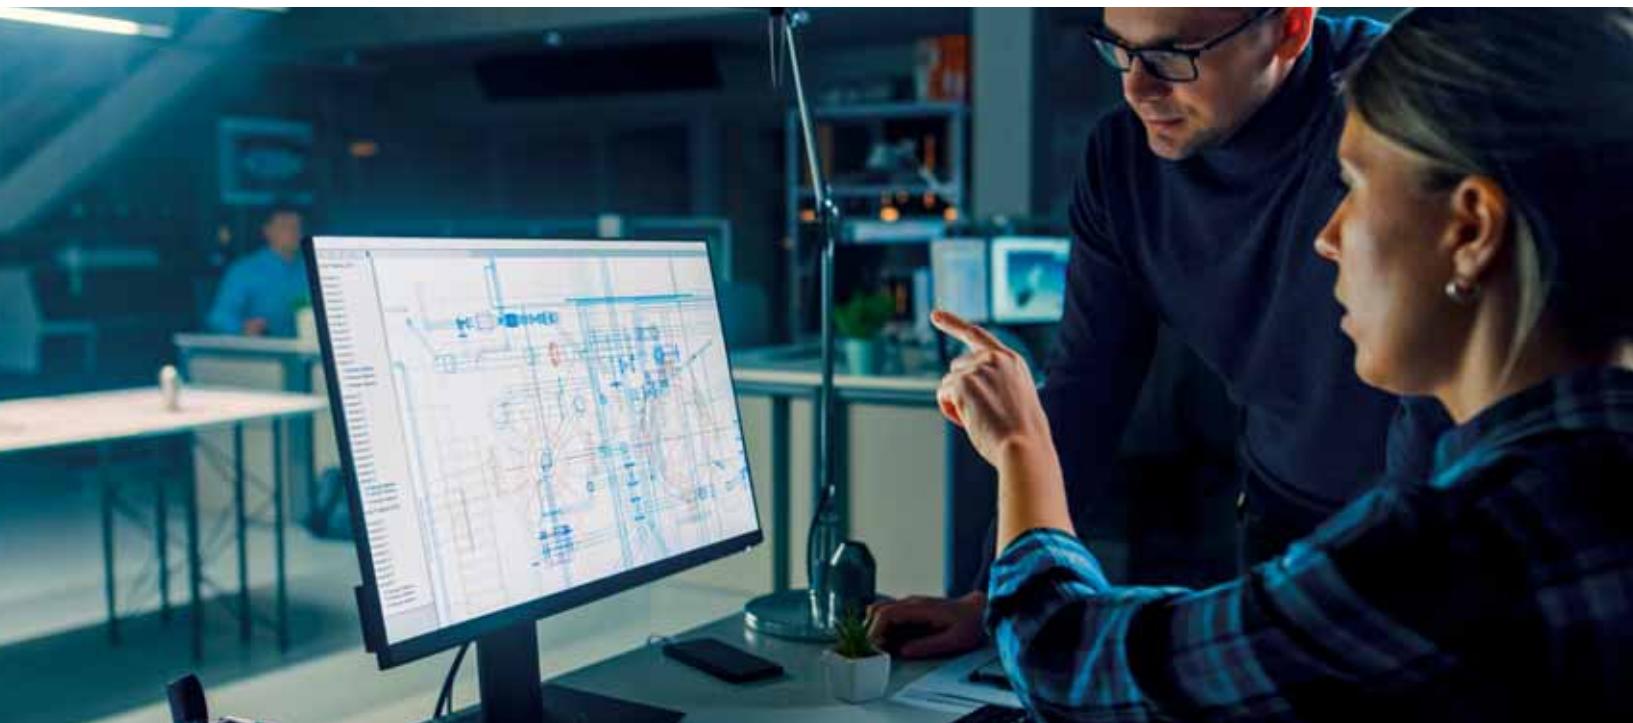

PATENT

1

## BALL VALVES WITH INTEGRATED QUICK COUPLINGS

### LEAN & COMPACT SOLUTIONS

Many components reduced to only one single item

### BETTER & GUARANTEED PERFORMANCES

One single body incorporates valve and coupling, that means no more leakages and contaminations of the system and a more uniform flow

### VARIOUS & CUSTOMIZED SOLUTIONS

Valve available in different threads and coupling standards according to request

ISO A / ISO B / FLAT FACE / N / NV / PUSH-PULL




PATENT

2

## DIRTY GAS APPLICATION

For some critical applications with dirty gas, especially in CNG field, **GEMELS SPA** patented a special insert with an internal stem to avoid completely the damaging of ball seats.

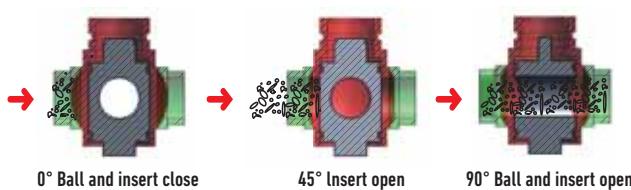

# DESIGN AND PATENT

Thanks to its philosophy, based on lean production, **GEMELS SPA** has specialized over the years in the design and production of valves for special & critical applications, providing customers with lean solutions and customized valves.

Thanks to the R&D department rigorous study of advanced and innovative solutions, **GEMELS SPA** has also obtained 4 patents in Italy and Europe.



PATENT  
**3**

## GEMFY

Our GEMFY Valve is studied for high-pressure application, ensuring:

- lower torque values.
- smaller & cheaper actuator.
- absence of an external bypass valve.
- more open/dose cycles.
- longer life of the ball valve.
- easier opening after long period of closing.

PATENT  
**4**

## FULLY WELDED

The patent is applicable to FULLY WELDED SBT valves, where the flanges are welded to the body (and not bolted).  
The patent allows to assemble and test the valve more safely, quickly and cheaply.

Thanks to the special grooves studied, which permit mounting and testing the body and the flanges, it is possible to perform the high-pressure leak test without performing the first weld overlay.  
That is both time-saving and money-saving.

# R&D

---

In **GEMELS SPA R&D Department**, our technicians study innovative solutions. In the last years, the Company has been focusing on GREEN POWER ENERGY with new projects in the ELECTRIC field. **GEMELS SPA** introduced three-phase synchronous ELECTRIC MOTORS and other new technological products.

## APPLICATIONS & SOLUTIONS

**GEMELS SPA** electric motors are studied for different applications: agriculture, earth moving, construction, cleaning, material handling, lifting equipment, transfer carts, automotive, e-mobility and many others.

## CUSTOMIZED Series





## LEAN CUSTOMIZED



**GEMELS SPA** studies and designs special lean customized solutions for its customers based on specific requests. Thanks to the close collaboration between **GEMELS SPA** technical department and the engineering department of the customers, we are able to study the best and most suitable solution for the application where our products will be mounted. **GEMELS SPA** can realize prototypes and samples. Our customized solutions can range over different fields, like agriculture, fire-fighting, construction and building, lifting, automotive, steel plant, heavy equipment and marine.



# QUALITY LAB

## INTERNAL LABORATORY

The main characteristic of **GEMELS SPA** ball valves is the excellence in quality, which is possible thanks to the accurate selection of raw materials, staff and partners made by the management.

Moreover, in the Internal Laboratory, **GEMELS SPA** qualified personnel tests the valves' lifespan, simulating critical applications and conditions with special machineries (burst test, impulse test, salt spray test, climatic room, Tridimensional check, microscope, hardness gauge, bidimensional gauge) to constantly ensure the highest quality.



QUALITY MANAGEMENT SYSTEM  
ISO 9001

HEALTH & SAFETY  
ISO 45001

ENVIRONMENTAL  
MANAGEMENT SYSTEMS  
ISO 14001

## PRODUCTS CERTIFICATIONS

- API 6D
- CE PED Mod. H
- CE PED Mod. A2
- ATEX
- FIRE SAFE
- FUGITIVE EMISSION
- TA LUFT
- SIL 3
- EAC
- CRN

**QUALITY MANAGEMENT SYSTEM**  
ISO 9001

**ENVIRONMENTAL MANAGEMENT SYSTEMS**  
ISO 14001

**HEALTH & SAFETY**  
ISO 45001

# PRODUCTION


---

## MORE THAN 60.000 VALVES PER MONTH

The production area, where **GEMELS SPA** produces more than 60.000 ball valves per month, consists of more than 50 machines, including automatic numerical controlled machines and semi-automatic ones, among which CNC, lathes, transfers, boring machines, machining centres etc.



MADE IN  
ITALY

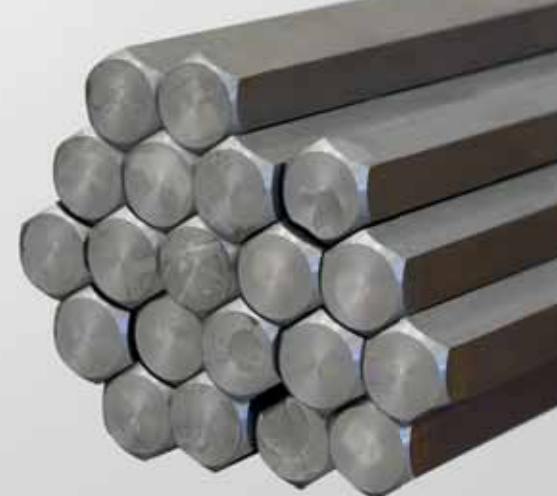

These technologies and the high qualified personnel help **GEMELS SPA** to achieve the quality standards and excellence, obtaining the required technical characteristics and gaining trustworthiness in the market.



The whole production follows all the required standards, performing rigorous tests after both the production and the assembly. After that, all valves are 100% tested using specific test benches.

# MANUAL ASSEMBLING

There is the 'historical' manual assembly line for the assembly of special models and of big size ball valves up to 42".



# AUTOMATIC ASSEMBLING

---

## ASSEMBLING AND TESTING LINE

To further guarantee the quality of our products, at the beginning of 2017 we installed a new automatic assembly line for the mounting and testing of the ball valves.






This machine permits the assembly and the relative test of all the standard valves up to 1". For each assembled valve an automatic report that shows every step of the process is made, thanks to the pictures shot by the cameras placed in each station of the machine.



# STOCK AND SHIPPING

## FAST DELIVERY

**GEMELS'** warehouse of 2.000 m<sup>2</sup> is divided between components and finished products. **GEMELS SPA** is able to guarantee a wide range of products with fast delivery.

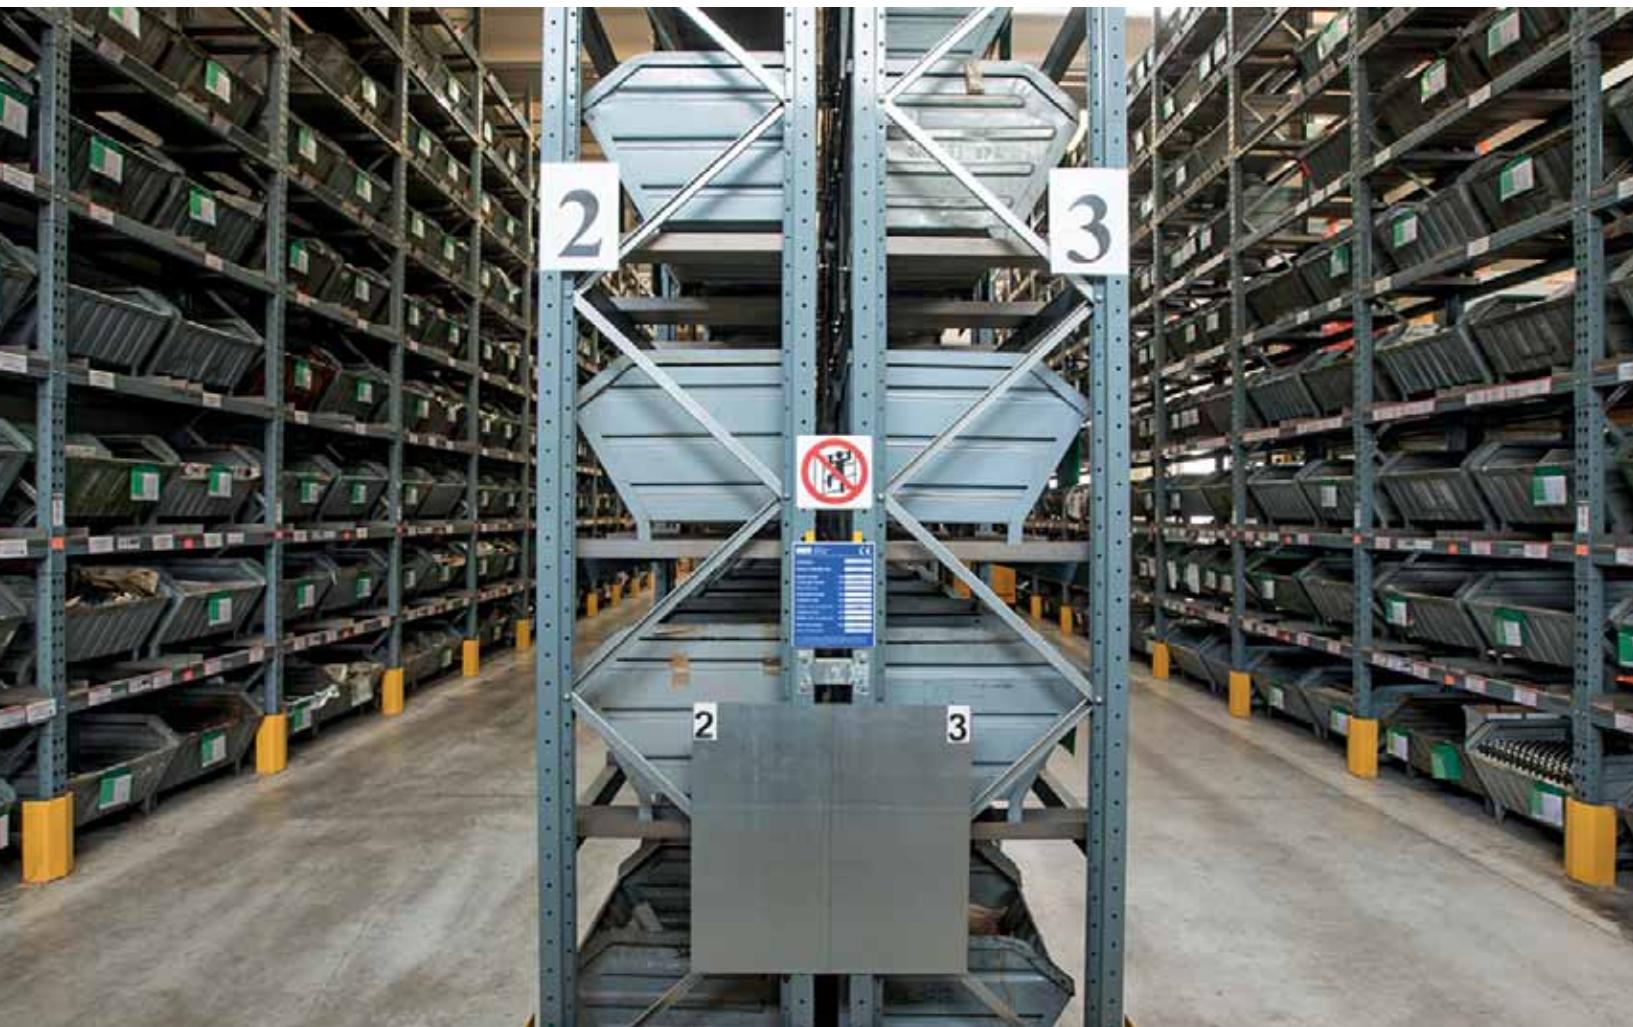



ELECTRIC MOTORS



HYDRAULIC QUICK COUPLINGS  
HYDRAULIC VALVES



OIL & GAS BALL VALVES



## ELECTRIC MOTORS



## ELECTRIC MOTORS



### GREEN POWER

Modular aluminum or steel structure

- from 2 kW to 100 kW
- from 48V to 400V
- up to 10.000 RPM

page 16



## HYDRAULIC QUICK COUPLINGS



## HYDRAULIC QUICK COUPLINGS



### FLAT FACE

- Carbon Steel and Stainless Steel
- Type: Quick Couplings
- Models: ISO 16028
- Sizes: from DN6 up to DN25
- Pressure: up to PN350

page 22



### VGA

- Carbon Steel
- Type: Quick Couplings
- Models: ISO 14541
- Sizes: from DN6 up to DN25
- Pressure: up to PN350

page 70



### FFAP

- Carbon Steel
- Type: Quick Couplings
- Models: ISO 16028
- Sizes: from DN6 up to DN25
- Pressure: up to PN350

page 40



### VGB

- Carbon Steel
- Type: Quick Couplings
- Models: ISO 14540
- Sizes: from DN6 up to DN10
- Pressure: up to PN350

page 84



### ISO A

- Carbon Steel and Stainless Steel
- Type: Quick Couplings
- Models: ISO 7241/A
- Sizes: from DN6 up to DN50
- Pressure: up to PN350

page 42



### DG

- Carbon Steel
- Type: Quick Couplings
- Models: ISO 15141-1
- Sizes: from DN6
- Pressure: up to PN350

page 86



### PUSH PULL

- Carbon Steel
- Type: Quick Couplings
- Models: ISO 7241/A
- Sizes: from DN10 up to DN25
- Pressure: up to PN350

page 48



### GE2 FF\*

- Carbon Steel
- Model: Ball Valve GE2 with Integrated Quick Coupling FLAT FACE
- Sizes: from DN10 up to DN25
- Pressure: up to PN350

### GE2 A\*

- Carbon Steel
- Model: Ball Valve GE2 with Integrated Quick Coupling ISO A
- Sizes: from DN10 up to DN25
- Pressure: up to PN350

### GE2 PP\*

- Carbon Steel
- Model: Ball Valve GE2 with Integrated Quick Coupling PUSH-PULL
- Sizes: from DN10 up to DN25
- Pressure: up to PN350

### GE2 VGA\*

- Carbon Steel
- Model: Ball Valve GE2 with Integrated Quick Coupling VGA
- Sizes: from DN10 up to DN25
- Pressure: up to PN350

page 90



### ISO B

- Carbon Steel and Stainless Steel
- Type: Quick Couplings
- Models: ISO 7241/B
- Sizes: from DN6 up to DN50
- Pressure: up to PN350

page 56



### N

- Carbon Steel
- Type: Quick Couplings
- Models: ISO 5675
- Sizes: from DN6 up to DN25
- Pressure: up to PN350

page 62



### NV

- Carbon Steel
- Type: Quick Couplings
- Models: ISO 5675
- Sizes: from DN6 up to DN25
- Pressure: up to PN350

page 66

\* patent



## HYDRAULIC VALVES



## HYDRAULIC VALVES



### CUSTOMIZED LEAN SOLUTION

page 108



### GE2 HC H<sub>2</sub>

- Stainless Steel
- Type: ball valve 2 way high cycles
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE
- Pressure: up to PN1000

page 148



### GEM

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way
- Sizes: DN6
- Ends: BSP-NPT-SAE
- Pressure: up to PN500

page 126



### GE3

- Carbon Steel and Stainless Steel
- Type: ball valve 3 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE-DIN
- Pressure: up to PN500

page 150



### GE1

- Carbon Steel
- Type: ball valve 2 way
- Sizes: from DN6 up to DN13
- Ends: BSP-NPT-SAE
- Pressure: up to PN500

page 130



### GE5

- Carbon Steel
- Type: ball valve 3 way
- Sizes: from DN6 up to DN13
- Ends: BSP-NPT-SAE
- Pressure: up to PN500

page 158



### GE2

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE-DIN
- Pressure: up to PN500

page 134



### GE3K

- Carbon Steel and Stainless Steel
- Type: ball valve 3 way special seats, zero leakage
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE
- Pressure: up to PN500

page 162



### GE2 HC

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way high cycles
- Sizes: from DN6 up to DN32
- Ends: BSP-NPT-SAE
- Pressure: up to PN500

page 142



### GEF

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: ISO6162-1/-2 SAEJ518-1/-2
- Pressure: up to PN420 / S6000

page 166

**HYDRAULIC VALVES**

**GES**

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: SAE J518
- Pressure: up to PN420 / S6000

page 170


**GBS**

- Carbon Steel and Stainless Steel
- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: SAE J518
- Pressure: up to PN420 / S6000

page 190


**GEF-S**

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: ISO6162-1/-2 SAEJ518-1/-2
- Pressure: up to PN420 / S6000

page 174


**GBF-S**

- Carbon Steel and Stainless Steel
- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: ISO6162-1/-2, SAEJ518-1/-2
- Pressure: up to PN420 / S6000

page 194


**GB1**

- Carbon Steel and Stainless Steel
- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: BSP-NPT-SAE
- Pressure: up to PN420

page 178


**GV2**

- Carbon Steel
- Type: ball valve 2 way
- Sizes: from DN6 up to DN32
- Ends: BSP-NPT-SAE / ISO6162-1
- Pressure: up to PN500 / S6000

page 198


**GB3**

- Carbon Steel and Stainless Steel
- Type: ball valve 3 way
- Sizes: from DN32 up to DN50
- Ends: BSP-NPT
- Pressure: up to PN350

page 182


**GV3**

- Carbon Steel
- Type: ball valve 3 way
- Sizes: from DN6 up to DN32
- Ends: BSP-NPT-SAE / ISO6162-1
- Pressure: up to PN500 / S6000

page 202


**GBF**

- Carbon Steel and Stainless Steel
- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: ISO6162-1/-2, SAEJ518-1/-2
- Pressure: up to PN420 / S6000

page 186


**G3K**

- Carbon Steel
- Type: ball valve 3 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT
- Pressure: up to PN500

page 206

**G4K**

- Carbon Steel
- Type: ball valve 4 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT
- Pressure: up to PN500

page 210

**GHP**

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way
- Sizes: from DN13 up to DN100
- Ends: BSP-NPT
- Pressure: up to PN370

page 232

**GPK2**

- Carbon Steel
- Type: manifold
- Sizes: from DN6 up to DN50
- Ends: Drilling pattern Gemels
- Pressure: up to PN500

page 214

**RF**

- Carbon Steel
- Type: check valve flow control
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT
- Pressure: up to PN400

page 236

**GPK3**

- Carbon Steel
- Type: manifold
- Sizes: from DN6 up to DN50
- Ends: Drilling pattern Gemels
- Pressure: up to PN500

page 218

**BD**

- Carbon Steel
- Type: reduce flow control B-directional
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT
- Pressure: up to PN400

page 240

**GRC**

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way
- Sizes: from DN25 up to DN125
- Ends: ISO6162-1 / ISO6162 (SAE J518) / ISO6164 (CETOP)
- Pressure: up to PN420 / S6000

page 222

**VU**

- Carbon Steel and Stainless Steel
- Type: check valve
- Sizes: from DN6 up to DN50
- Ends: BSP-NPT-SAE
- Pressure: up to PN500

page 244

**GRS**

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way
- Sizes: from DN13 up to DN125
- Ends: ISO6162-1 / ISO6162 (SAE J518) / ISO6164 (CETOP)
- Pressure: up to PN420 / S6000

page 226

**GEV**

- Carbon Steel
- Type: shuttle valve 3 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE
- Pressure: up to PN500

page 248

## HYDRAULIC VALVES



### GPS

- Carbon Steel
- Type: 3-ways single pilot operated check valves with zinc-plated steel body
- Sizes: from DN6 up to DN25
- Ends: BSP
- Pressure: up to PN400

page 252



### KITS

- Locking
- Handles
- Pneumatic&Electric Actuators
- Limit Switch

page 327



### VU VUBA

- Carbon Steel
  - Type: hose break valve
  - Sizes: from DN6 up to DN25
  - Ends: BSP-NPT-SAE
  - Pressure: up to PN350
- VBF** Female insert  
**VBM** Male insert

page 254

### TECH



page 373



### SJ

- Carbon Steel
- Type: swivel joint / at 90°
- Sizes: from DN6 up to DN50
- Ends: BSP- NPT (on request)
- Pressure: up to PN400

page 258



### DDF

- Cast Iron
- Type: 3 ways flow dividers
- Pressure: up to PN300

page 262



### VBP

- Carbon Steel

#### VBPSE / VBPDE / VBPDE CEXC


- Type: single pilot operated check valves
- Sizes: from DN6 up to DN50
- Ends: BSP
- Pressure: up to PN350

page 264





## OIL & GAS BALL VALVES

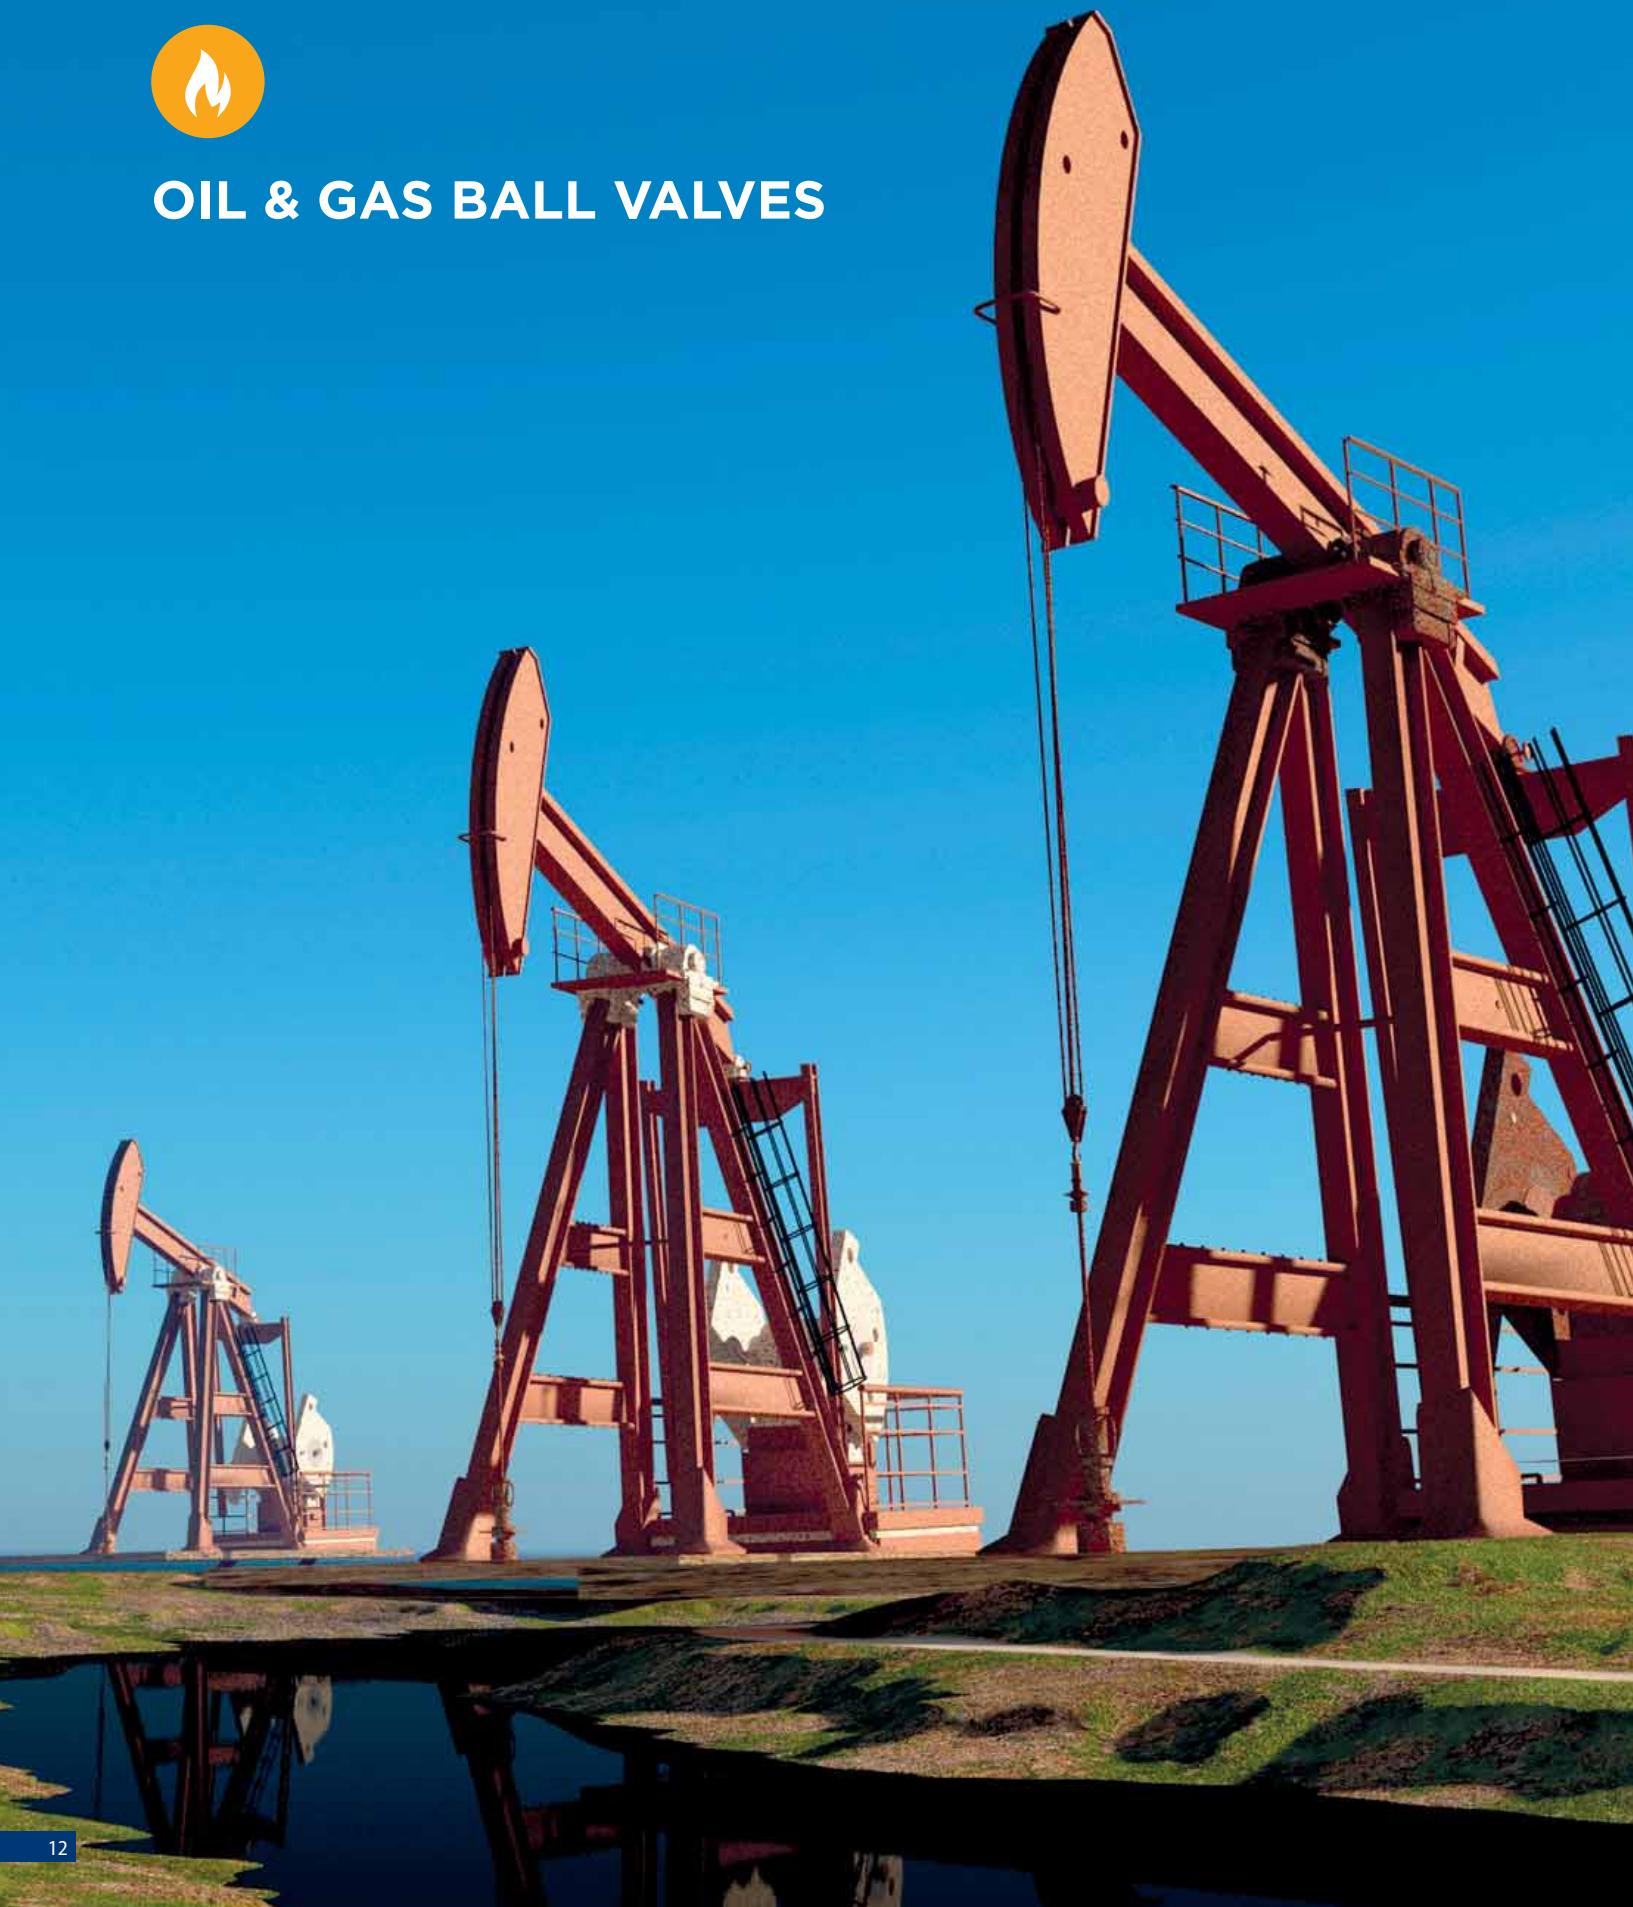

## OIL & GAS BALL VALVES



### GN

- Carbon Steel and Stainless Steel
- Type: ball valve 2way
- Sizes: from DN6 up to DN50
- Ends: BSP-NPT-SW-SWXT -PE BW
- Pressure: up to PN500 / S6000

page 270



### SBT

- CS, SS, DSS, ALLOY (Forged)
- Type: ball valve Split Body Trunnion
  - Sizes: from DN20 up to DN900
  - Pressure: ANSI 150-2500

page 304



### GM

- Carbon Steel and Stainless Steel
- Type: ball valve 2way
- Sizes: from DN6 up to DN100
- Ends: BSP-NPT-SW-SWXT -PE BW
- Pressure: up to PN500 / S3000

page 282



### DBB

- CS, SS, DSS, ALLOY (Forged)
- Type: ball valve Double Block and Bleed
  - Sizes: from DN13 up to DN200
  - Pressure: ANSI 150-2500

page 318



### SBF-W

- CS, SS, DSS, ALLOY (Forged)
- Type: ball valve Split Body Floating-Wafer type
  - Sizes: from DN13 up to DN150
  - Pressure: ANSI150-600

page 290



### KITS

- Locking
- Handles
- Pneumatic&Electric Actuators
- Limit Switch

page 327



### SBF

- CS, SS, DSS, ALLOY (Forged)
- Type: ball valve Split Body Floating
  - Sizes: from DN13 up to DN150
  - Pressure: ANSI 150-2500

page 294



### TECH

page 373





## ELECTRIC POWER SUPPLY

**GEMELS** series of electric motors, designed and produced in Italy, consists in AC three-phase torque motors, available in different models with power from 2 kW to 100 kW, from 48V to 400V, and up to 10.000 RPM.

Motors can be designed for traction solutions, Hydraulic power units (pump interfaces) and with standard flanges (IEC/NEMA), air and liquid cooling, power cables with motor connection box or directly connected to the winding.



E  
L  
E  
C  
T  
R  
I  
C



# ELECTRIC MOTORS

Edition. 21.0

## CUSTOMIZED ON REQUEST

### • HIGHEST RELIABILITY

High safety and trustworthy products that operate in a defined environment without failure.

### • GREEN POWER SUPPLY

A subset of renewable energy to provide the highest environmental benefit.

### • COMPACT DIMENSIONS

Small, compatible and suitable products.

### • ENERGY SAVING

Products with a sensible reduction on consumption of energy to have higher life's quality.




[360.gemels.it](http://360.gemels.it)





ABOVE SIZES AND POWER  
ACCORDING TO REQUEST

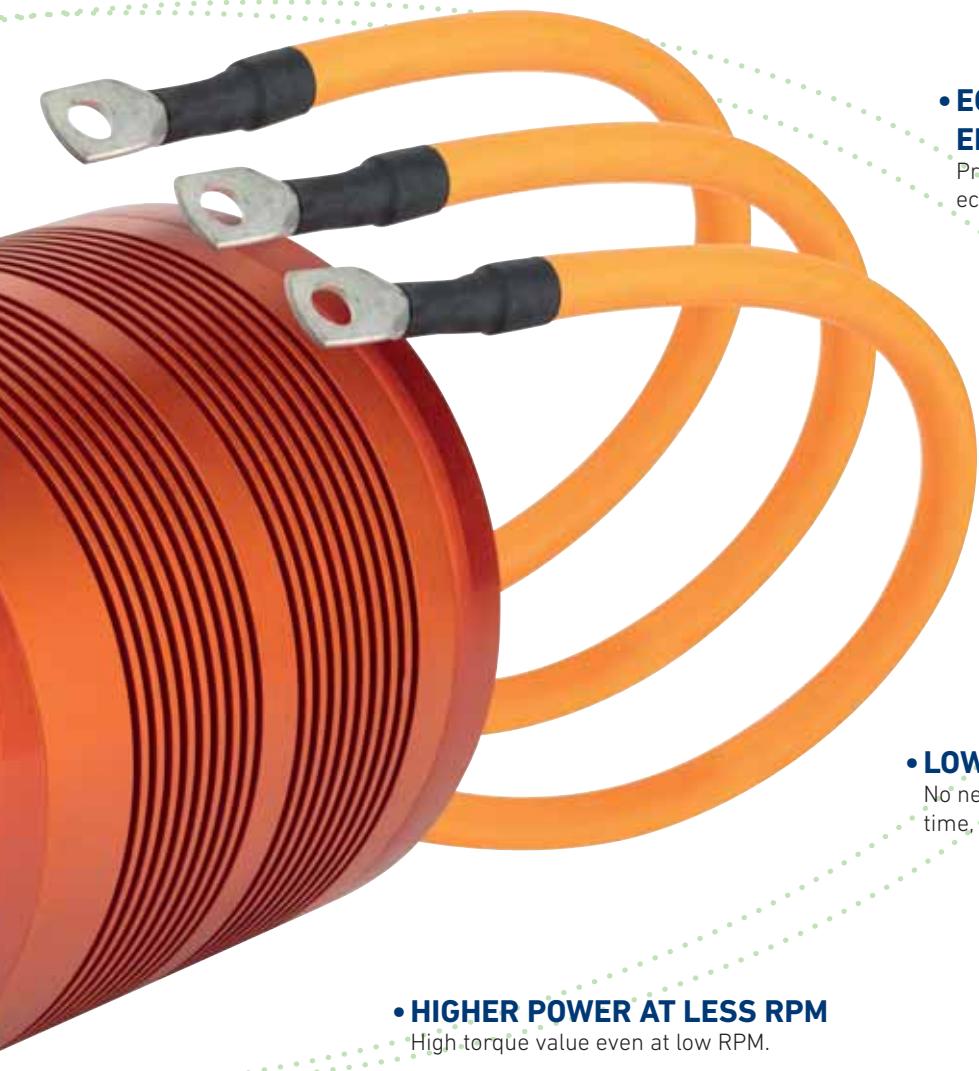

- **ECOLOGICAL ENVIRONMENTAL IMPACT**

Products focused on prevent of the ecological impact on world environment.

- **NOISE REDUCTION AND EMISSIONS-FREE**

Products without waste of pollution in the environment.

- **LOW-MAINTENANCE**



No necessity to do big maintenance, efforts, time, on the plant.

- **HIGHER POWER AT LESS RPM**

High torque value even at low RPM.

## EFFICIENCY MAP

## Diagrams

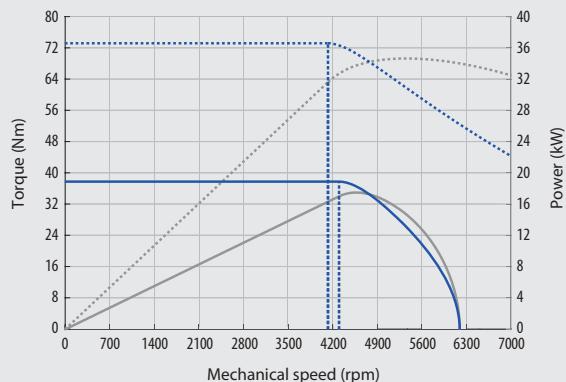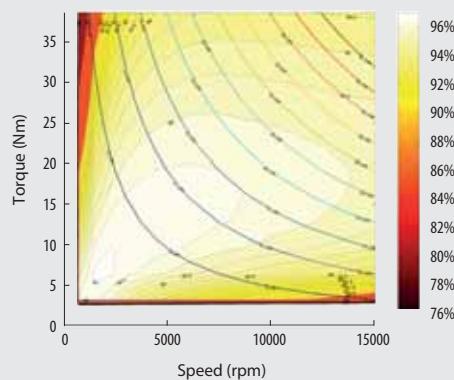

## TECHNICAL DATA

TYPE	Rated power (kW) at 48Vdc 2000RPM	Rated power (kW) at 72Vdc 3000RPM	Rated power (kW) at 96Vdc 4000RPM	Rated torque (Nm)	Cooling	IP
GEPG05_04K	2 kW	3 kW	4 kW	10 Nm	AIR / liquid +75% torque power value	IP54 (on request IP67)
GEPG05_06K	3 kW	4,5 kW	6 kW	15 Nm	AIR / liquid +75% torque power value	IP54 (on request IP67)
GEPG_H_06K available with Hydraulic Pump	3 kW	4,5 kW	6 kW	15 Nm	AIR / liquid +75% torque power value	IP54 (on request IP67)
GEPG05_10K	5 kW	7 kW	10 kW	23 Nm	AIR / liquid +75% torque power value	IP54 (on request IP67)
GEPG05_16K	8 kW	12 kW	16 kW	38 Nm	AIR / liquid +75% torque power value	IP54 (on request IP67)
GEPG_H_16K available with Hydraulic Pump	8 kW	12 kW	16 kW	30 Nm	AIR / liquid +75% torque power value	IP54 (on request IP67)
GEPG05_12K	6 kW	9 kW	11,5 kW	28 Nm	Liquid	IP54 (on request IP67)
GEPG05_16K	8 kW	11,5 kW	15,5 kW	37 Nm	Liquid	IP54 (on request IP67)
GEPG05_20K	10 kW	14,5 kW	19,5 kW	47 Nm	Liquid	IP54 (on request IP67)
GEPG05_24K	12 kW	18 kW	24 kW	58 Nm	Liquid	IP54 (on request IP67)
GEPG05_36K	18,5 kW	24 kW	36 kW	88 Nm	Liquid	IP54 (on request IP67)
GEPG05_42K	21 kW	32 kW	42 kW	100 Nm	Liquid	IP54 (on request IP67)

**Technical features:** Modular aluminium or steel structure from 2kW to 42kW suitable for services HYDRAULIC UNITS 0-8000 RPM 48-400 Volt

GEP05

Customized on request

Modular aluminium or steel structure from 42kW to 50kW  
suitable for services - HEAVY HANDLING  
0-10000 RPM / 96 - 400 Volt

Modular aluminium or steel structure from 50kW to 100kW  
suitable for traction - HEAVY TRACTION  
0-10000 RPM / 400 Volt

# NEW PROJECT FOR GREEN POWER

...COMING SOON



READY TO GO  
GEMELS ELECTRICAL





**GEMELS**, known all over the world in the hydraulic and industrial field, always increases its range of products. For this reason, together with valves, **GEMELS** produces quick couplings for a large sector, such as agriculture. At the beginning, starting with ISO 7241 / A, ISO 7241 / B, ISO 16028 FLAT FACE, then to models such as ISO 5675 N and NV, PUSH-PULL, BULKHEAD, FLAT FACE CONNECTION UNDER PRESSURE and many others.

# QUICK COUPLINGS





# FLAT FACE

## QUICK COUPLINGS

Available other different threads on request


Edition. 21.0

### CS Carbon Steel

- Type: Quick Couplings
- Models: ISO 16028 FLAT FACE
- Sizes: from DN6 to DN25
- Pressure: up to PN350


### SS Stainless Steel

- Type: Quick Couplings
- Models: ISO 16028 FLAT FACE
- Sizes: from DN6 to DN25
- Pressure: up to PN350

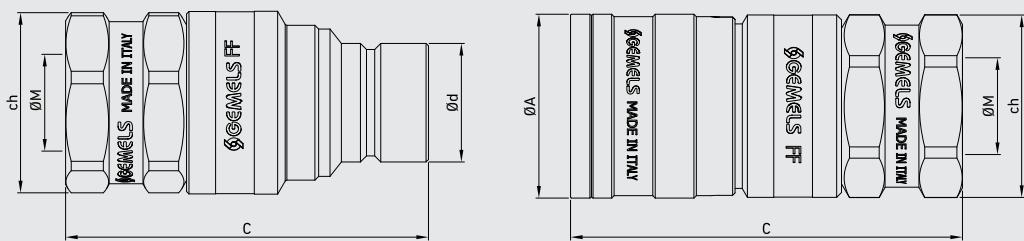

#### Performance

(1/4", 3/8", 1/2", 5/8", 3/4", 1")  
Series (1/4", 3/8", 1/2", 5/8", 3/4", 1")  
200SUS (Test Fluid: Oil-200SUS)

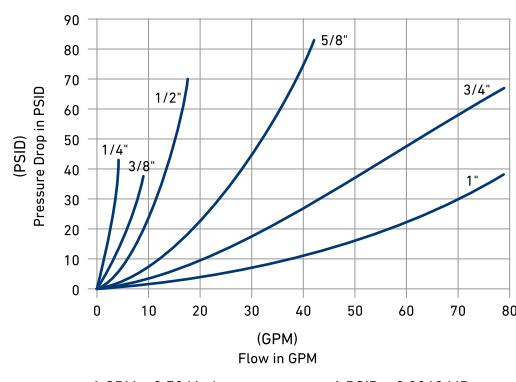

1 GPM = 3.78 l/min


1 PSID = 0.0069 MPa



## CODE DESCRIPTION STRUCTURE


	QC	G1/2	M/F	DN12,5	1	B	
Type of coupling							
ISO 16028 FF							
Ends							
BSP	NPT	SAE	DIN LIGHT SERIES	DIN HEAVY SERIES	BULKHEAD DIN LIGHT SERIES	BULKHEAD DIN HEAVY SERIES	JIC
G 1/4	N 1/4	SAE4	8L	8S	8L	8S	J 3/8
G 3/8	N 3/8	SAE6	10L	12S	10L	12S	J 5/8
G 1/2	N 1/2	SAE12	12L	16S	12L	16S	J 1/2
G 3/4	N 3/4	SAE16	15L	25S	15L	20S	J 3/4
G 1	N 1	SAE20	18L		18L	25S	J 1
G 1 1/4	N 1 1/4	SAE24					
MALE							
FEMALE							
DN/ISO							
6,3							
10							
12,5							
16							
20							
25							
Body Material							
● 1 = 1,0737							
● 4 = 1,4404							
Seal material							
● B = NBR E = FKM*							
● E = FKM							

\*On request  
 • Cups  
 • Plugs




## ■ QUICK COUPLINGS ISO 16028 FLAT FACE BSP (QC male / female)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE	CS Carbon Steel		TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE	CS Carbon Steel	
										MPa	Psi	mm	inch	-	-	-	-	kg	lb				
QC FF G 1/4 MALE	6.3	MPa 35	mm 48	16,15	24	G1/4		kg 0,09	NC05G010000	QC FF G 3/4 MALE	MPa 35	mm 88,5	29,95	41	G3/4		kg 0,48	NC05G040005					
Psi 5075		inch 1,89	0,64	0,94				lb 0,20		Psi 5075	inch -	3,48	1,18	1,61			lb 1,06						
QC FF G 1/4 FEMALE	6.3	MPa 35	mm 27	61,5	-	24	G1/4	kg 0,151	NC06G010000	QC FF G 3/4 FEMALE	MPa 35	mm 45	99	-	41	G3/4	kg 0,78	NC06G040005					
Psi 5075		inch 1,06	2,42	-	0,94			lb 0,33		Psi 5075	inch 1,77	3,90	-	1,61		lb 1,72							
QC FF G 3/8 MALE	10	MPa 35	mm 65,5	19,75	30	G3/8		kg 0,11	NC05G020000	QC FF G 1 MALE	MPa 35	mm 92	29,95	41	G1		kg 0,436	NC05G050000					
Psi 5075		inch 2,58	0,78	1,18				lb 0,24		Psi 5075	inch -	3,62	1,18	1,61			lb 0,96						
QC FF G 3/8 FEMALE	10	MPa 35	mm 31	75	-	30	G3/8	kg 0,29	NC06G020000	QC FF G 1 FEMALE	MPa 35	mm 45	103	-	41	G1	kg 0,733	NC06G050000					
Psi 5075		inch 1,22	2,95	-	1,18			lb 0,64		Psi 5075	inch 1,77	4,06	-	1,61		lb 1,62							
QC FF G 1/2 MALE	10	MPa 35	mm 69,5	19,75	30	G1/2		kg 0,13	NC05G030000	QC FF G 1 MALE	MPa 35	mm 100	36	50	G1		kg 0,58	NC05G050002					
Psi 5075		inch 2,74	0,78	1,18				lb 0,29		Psi 5075	inch -	3,94	1,42	1,97			lb 1,28						
QC FF G 1/2 FEMALE	10	MPa 35	mm 31	79	-	30	G1/2	kg 0,25	NC06G030000	QC FF G 1 FEMALE	MPa 35	mm 54,5	100	-	50	G1	kg 1,25	NC06G050002					
Psi 5075		inch 1,22	3,11	-	1,18			lb 0,55		Psi 5075	inch 2,15	3,94	-	1,97		lb 2,76							
QC FF G 1/2 MALE	12,5	MPa 35	mm 75	24,5	34	G1/2		kg 0,317	NC05G030003	QC FF G 1 1/4 MALE	MPa 35	mm 103	36	50	G1 1/4		kg 0,696	NC05G060000					
Psi 5075		inch 2,95	0,96	1,34				lb 0,70		Psi 5075	inch -	4,06	1,42	1,97			lb 1,53						
QC FF G 1/2 FEMALE	12,5	MPa 35	mm 38	81	-	34	G1/2	kg 0,377	NC06G030003	QC FF G 1 1/4 FEMALE	MPa 35	mm 54,5	103	-	50	G1 1/4	kg 1,323	NC06G060000					
Psi 5075		inch 1,50	3,19	-	1,34			lb 0,83		Psi 5075	inch 2,15	4,06	-	1,97		lb 2,92							
QC FF G 3/4 MALE	12,5	MPa 35	mm 77,5	24,5	34	G3/4		kg 0,291	NC05G040000	QC FF G 1 1/2 MALE	MPa 35	mm 103	36	55	G1 1/2		kg 0,75	NC05G070000					
Psi 5075		inch 3,05	0,96	1,34				lb 0,64		Psi 5075	inch -	4,06	1,42	2,17			lb 1,65						
QC FF G 3/4 FEMALE	12,5	MPa 35	mm 38	8,5	-	34	G3/4	kg 0,411	NC06G040000	QC FF G 1 1/2 FEMALE	MPa 35	mm 54,5	103	-	55	G1 1/2	kg 1,53	NC06G070000					
Psi 5075		inch 1,50	0,33	-	1,34			lb 0,91		Psi 5075	inch 2,15	4,06	-	2,17		lb 3,37							
QC FF G 1/2 MALE	16	MPa 25	mm 81	27	41	G5/8		kg 0,35	NC05GA30000	ABOVE ISO 25 G 1.1/2" : ON REQUEST													
Psi 3625		inch 3,19	1,06	1,61				lb 0,77															
QC FF G 1/2 FEMALE	16	MPa 25	mm 42	88	-	41	G5/8	kg 0,49	NC06GA30000	MPa 25	mm 80	27	41	G1/2		kg 0,4	NC05G030004						
Psi 3625		inch 1,65	3,46	-	1,61			lb 1,08		Psi 3625	inch -	3,15	1,06	1,61			lb 0,88						
QC FF G 5/8 MALE	16	MPa 25	mm 42	87	-	41	G1/2	kg 0,52	NC06G030004	MPa 25	mm 83,5	27	41	G3/4		kg 0,3	NC05G040004						
Psi 3625		inch 1,65	3,43	-	1,61			lb 1,15		Psi 3625	inch -	3,29	1,06	1,61			lb 0,66						
QC FF G 5/8 FEMALE	16	MPa 25	mm 42	91	-	41	G3/4	kg 0,47	NC06G040004	MPa 25	mm 87	27	41	G1		kg 0,45	NC05G050003						
Psi 3625		inch 1,65	3,58	-	1,61			lb 1,04		Psi 3625	inch -	3,43	1,06	1,61			lb 0,99						
QC FF G 3/4 MALE	16	MPa 25	mm 42	95	-	41	G1	kg 0,45	NC05G050003	MPa 25	mm 42	95	-	41	G1	kg 0,6	NC06G050003						
Psi 3625		inch 1,65	3,74	-	1,61			lb 1,32		Psi 3625	inch -	3,43	1,06	1,61			lb 1,32						



## QUICK COUPLINGS ISO 16028 FLAT FACE BSP (QC male / female)


TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	SS	ITEM CODE		SS	ITEM CODE								
									Stainless Steel			Stainless Steel									
QC FF G 1/4 MALE	6.3	MPa 35	mm - 48	16,15	24	G1/4	kg 0,09	NC05G010001	QC FF G 3/4 MALE	MPa 35	mm - 88,5	29,95	41	G3/4	kg 0,48	NC05G04S000					
		Psi 5075	inch - 1,89	0,64	0,94		lb 0,20		Psi 5075	inch - 3,48	1,18	1,61		lb 1,06							
QC FF G 1/4 FEMALE		MPa 35	mm 27	61,5	-	24	kg 0,151	NC06G010001	QC FF G 3/4 FEMALE	MPa 35	mm 45	99	-	41	kg 0,78	NC06G04S000					
		Psi 5075	inch 1,06	2,42	-	0,94	lb 0,33		Psi 5075	inch 1,77	3,90	-	1,61	lb 1,72							
QC FF G 3/8 MALE	10	MPa 35	mm - 65,5	19,75	30	G3/8	kg 0,11	NC05G020001	QC FF G 1 MALE	MPa 35	mm - 92	29,95	41	G1	kg 0,436	NC05G050001					
		Psi 5075	inch - 2,58	0,78	1,18		lb 0,24		Psi 5075	inch - 3,62	1,18	1,61		lb 0,96							
QC FF G 3/8 FEMALE		MPa 35	mm 31	75	-	30	kg 0,29	NC06G020001	QC FF G 1 FEMALE	MPa 35	mm 45	103	-	41	kg 0,733	NC06G050001					
		Psi 5075	inch 1,22	2,95	-	1,18	lb 0,64		Psi 5075	inch 1,77	4,06	-	1,61	lb 1,62							
QC FF G 1/2 MALE		MPa 35	mm - 69,5	19,75	30	G1/2	kg 0,13	NC05G02S000	QC FF G 1 MALE	MPa 35	mm - 100	36	50	G1	kg 0,58	NC05G05S000					
		Psi 5075	inch - 2,74	0,78	1,18		lb 0,29		Psi 5075	inch - 3,94	1,42	1,97		lb 1,28							
QC FF G 1/2 FEMALE		MPa 35	mm 31	79	-	30	kg 0,25	NC06G02S000	QC FF G 1 FEMALE	MPa 35	mm 54,5	100	-	50	kg 1,25	NC06G05S000					
		Psi 5075	inch 1,22	3,11	-	1,18	lb 0,55		Psi 5075	inch 2,15	3,94	-	1,97	lb 2,76							
QC FF G 1/2 MALE	12,5	MPa 35	mm - 75	24,5	34	G1/2	kg 0,317	NC05G030002	QC FF G 1 1/4 MALE	MPa 35	mm - 103	36	50	G1 1/4	kg 0,696	NC05G060001					
		Psi 5075	inch - 2,95	0,96	1,34		lb 0,70		Psi 5075	inch - 4,06	1,42	1,97		lb 1,53							
QC FF G 1/2 FEMALE		MPa 35	mm 38	81	-	34	kg 0,377	NC06G030002	QC FF G 1 1/4 FEMALE	MPa 35	mm 54,5	103	-	50	kg 1,323	NC06G060001					
		Psi 5075	inch 1,50	3,19	-	1,34	lb 0,83		Psi 5075	inch 2,15	4,06	-	1,97	lb 2,92							
QC FF G 3/4 MALE		MPa 35	mm - 77,5	24,5	34	G3/4	kg 0,291	NC05G03S000	QC FF G 1 1/2 MALE	MPa 35	mm - 103	36	55	G1 1/2	kg 0,75	NC05G05S001					
		Psi 5075	inch - 3,05	0,96	1,34		lb 0,64		Psi 5075	inch - 4,06	1,42	2,17		lb 1,65							
QC FF G 3/4 FEMALE		MPa 35	mm 38	8,5	-	34	kg 0,411	NC06G03S000	QC FF G 1 1/2 FEMALE	MPa 35	mm 54,5	103	-	55	kg 1,53	NC06G05S001					
		Psi 5075	inch 1,50	0,33	-	1,34	lb 0,91		Psi 5075	inch 2,15	4,06	-	2,17	lb 3,37							
QC FF G 1/2 MALE	16	MPa 25	mm - 81	27	41	G5/8	kg 0,35	NC05GA3S000	ABOVE ISO 25 G 1 1/2": ON REQUEST												
		Psi 3625	inch - 3,19	1,06	1,61		lb 0,77														
QC FF G 1/2 FEMALE		MPa 25	mm 42	88	-	41	kg 0,49	NC06GA3S000													
		Psi 3625	inch 1,65	3,46	-	1,61	lb 1,08														
QC FF G 5/8 MALE		MPa 25	mm - 80	27	41	G1/2	kg 0,4	NC05GA3S001													
		Psi 3625	inch 1,65	3,15	1,06	1,61	lb 0,88														
QC FF G 5/8 FEMALE		MPa 25	mm 42	87	-	41	kg 0,52	NC06GA3S001													
		Psi 3625	inch 1,65	3,43	-	1,61	lb 1,15														
QC FF G 3/4 MALE		MPa 25	mm - 83,5	27	41	G3/4	kg 0,3	NC05G040002													
		Psi 3625	inch - 3,29	1,06	1,61		lb 0,66														
QC FF G 3/4 FEMALE		MPa 25	mm 42	91	-	41	kg 0,47	NC06G040002													
		Psi 3625	inch 1,65	3,58	-	1,61	lb 1,04														
QC FF G 1 MALE		MPa 25	mm - 87	27	41	G1	kg 0,45	NC05GA3S002													
		Psi 3625	inch - 3,43	1,06	1,61		lb 0,99														
QC FF G 1 FEMALE		MPa 25	mm 42	95	-	41	kg 0,6	NC06GA3S002													
		Psi 3625	inch 1,65	3,74	-	1,61	lb 1,32														



## ■ QUICK COUPLINGS ISO 16028 FLAT FACE NPT (QC male / female)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE	CS Carbon Steel		TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE	CS Carbon Steel									
										MPa	inch	mm	-	kg	lb	N1/4	kg	lb	N3/4	kg	lb	N3/4	kg	lb							
QC FF N 1/4 MALE	6.3	MPa 35	mm - 49,5	16,15	24			0,09	NC05N010000	QC FF N 3/4 MALE	MPa 35	mm - 88,5	29,95	41			N1/4	kg 0,48		NC05N040005	QC FF N 3/4 FEMALE	MPa 35	mm 45	99	-	41		N3/4	kg 0,78		NC06N040005
QC FF N 1/4 FEMALE		Psi 5075	inch - 1,95	0,64	0,94			0,20		Psi 5075	inch - 3,48	1,18	1,61				lb 1,06				Psi 5075	inch 1,77	3,90	-	1,61		lb 1,72			NC06N040005	
QC FF N 3/8 MALE	10	MPa 35	mm - 67,5	19,75	30			0,11	NC05N020000	QC FF N 1 MALE	MPa 35	mm - 92	29,95	41			N1	kg 0,436		NC05N050000	QC FF N 3/8 FEMALE	MPa 35	mm 31	77	-	30		N3/4	kg 0,78		NC06N050000
QC FF N 3/8 FEMALE		Psi 5075	inch - 2,66	0,78	1,18			0,24		Psi 5075	inch - 3,62	1,18	1,61				lb 0,64				Psi 5075	inch 1,77	3,90	-	1,61		lb 1,62			NC06N050000	
QC FF N 1/2 MALE	10	MPa 35	mm - 72	19,75	30			0,13	NC05N030000	QC FF N 1 FEMALE	MPa 35	mm 45	99	-	41		N1	kg 0,733		NC06N050000	QC FF N 1/2 FEMALE	MPa 35	mm - 100	36	50			N1	kg 0,58		NC05N050002
QC FF N 1/2 FEMALE		Psi 5075	inch - 2,83	0,78	1,18			0,29		Psi 5075	inch - 3,94	1,42	1,97				lb 0,64				Psi 5075	inch 2,15	3,94	-	1,97		lb 2,76			NC06N050002	
QC FF N 1/2 MALE	12,5	MPa 35	mm - 75	24,5	34			0,317	NC05N030003	QC FF N 1 1/4 MALE	MPa 35	mm - 103	36	50			N1 1/4	kg 0,696		NC05N060000	QC FF N 1/2 FEMALE	MPa 35	mm 38	81	-	34		N1/2	kg 1,25		NC06N060000
QC FF N 1/2 FEMALE		Psi 5075	inch - 2,95	0,96	1,34			0,70		Psi 5075	inch - 4,06	1,42	1,97				lb 0,317				Psi 5075	inch 2,15	4,06	-	1,97		lb 2,92			NC06N060000	
QC FF N 3/4 MALE	12,5	MPa 35	mm - 78	24,5	34			0,291	NC05N040000	QC FF N 1 1/4 FEMALE	MPa 35	mm 54,5	103	-	50		N1 1/4	kg 1,323		NC06N060000	QC FF N 3/4 FEMALE	MPa 35	mm - 103	36	55			N1 1/2	kg 0,75		NC05N070000
QC FF N 3/4 FEMALE		Psi 5075	inch - 3,07	0,96	1,34			0,64		Psi 5075	inch - 4,06	1,42	2,17				lb 0,291				Psi 5075	inch 2,15	4,06	-	2,17		lb 2,92			NC06N070000	
QC FF N 1/2 MALE	16	MPa 25	mm - 82	27	41			0,4	NC05N030004	QC FF N 1 1/2 MALE	MPa 35	mm - 103	36	55			N1 1/2	kg 1,53		NC06N070000	QC FF N 1/2 FEMALE	MPa 25	mm 38	84	-	34		N1 1/2	kg 1,53		NC06N070000
QC FF N 1/2 FEMALE		Psi 3625	inch - 3,23	1,06	1,61			0,88		Psi 3625	inch 1,65	3,43	1,61	-			lb 0,4				Psi 3625	inch - 4,06	1,42	2,17			lb 3,37			NC06N070000	
QC FF N 3/4 MALE	16	MPa 25	mm 42	87	41	-		0,52	NC06N030004	QC FF N 1 1/2 FEMALE	MPa 35	mm 54,5	103	-	55		N1 1/2	kg 1,65		NC06N070000	QC FF N 1 MALE	MPa 25	mm - 82	27	41			N1	kg 0,45		NC05N050003
QC FF N 3/4 FEMALE		Psi 3625	inch 1,65	3,43	1,61	-		1,15		Psi 3625	inch - 3,29	1,06	1,61	-			lb 0,52				Psi 3625	inch - 3,43	1,06	1,61	-		lb 1,32			NC05N050003	
QC FF N 1 MALE	16	MPa 25	mm - 87	27	41			0,45	NC05N050003	QC FF N 1 FEMALE	MPa 25	mm 42	95	-	41		N1	kg 0,6		NC06N050003	QC FF N 1 MALE	MPa 25	mm - 82	27	41			N1	kg 0,99		NC05N050003
QC FF N 1 FEMALE		Psi 3625	inch 1,65	3,74	1,61	-		1,32		Psi 3625	inch - 3,43	1,06	1,61	-			lb 0,45				Psi 3625	inch - 3,43	1,06	1,61	-		lb 1,32			NC05N050003	


ABOVE ISO 25 G 1.1/2" : ON REQUEST



## QUICK COUPLINGS ISO 16028 FLAT FACE NPT (QC male / female)


TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	SS	ITEM CODE	TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	SS	ITEM CODE
									Stainless Steel												
QC FF N 1/4 MALE	6,3	MPa 35	mm -	49,5	16,15	24	N1/4	kg 0,09	NC05N01S000	QC FF N 3/4 MALE	19	MPa 35	mm -	88,5	29,95	41	N3/4	kg 0,48	NC05N04S000		
		Psi 5075	inch -	1,95	0,64	0,94		lb 0,20				MPa 35	mm -	3,48	1,18	1,61		lb 1,06			
QC FF N 1/4 FEMALE	6,3	MPa 35	mm 27	63	-	24	N1/4	kg 0,151	NC06N01S000	QC FF N 3/4 FEMALE	19	Psi 5075	inch 1,06	2,48	-	0,94		lb 0,33			
		Psi 5075	inch -	1,06	2,48	-		lb 0,33				MPa 35	mm 45	99	-	41		N3/4	kg 0,78		
QC FF N 3/8 MALE	10	MPa 35	mm -	67,5	19,75	30	N3/8	kg 0,11	NC05N02S000	QC FF N 1 MALE	19	Psi 5075	inch -	2,66	0,78	1,18		lb 0,24			
		Psi 5075	inch -	2,66	0,78	1,18		lb 0,24				MPa 35	mm -	92	29,95	41	N1	kg 0,436			
QC FF N 3/8 FEMALE	10	MPa 35	mm 31	77	-	30	N3/8	kg 0,29	NC06N02S000	QC FF N 1 FEMALE	19	Psi 5075	inch 1,22	3,03	-	1,18		lb 0,64			
		Psi 5075	inch -	1,22	3,03	-		lb 0,64				MPa 35	mm 45	99	-	41		N1	kg 0,733		
QC FF N 1/2 MALE	10	MPa 35	mm -	72	19,75	30	N1/2	kg 0,13	NC05N02S001	QC FF N 1 MALE	25	Psi 5075	inch -	2,83	0,78	1,18		lb 0,29			
		Psi 5075	inch -	2,83	0,78	1,18		lb 0,29				MPa 35	mm -	100	36	50	N 1	kg 0,58			
QC FF N 1/2 FEMALE	10	MPa 35	mm 31	82	-	30	N1/2	kg 0,25	NC06N02S001	QC FF N 1 FEMALE	25	Psi 5075	inch 1,22	3,23	-	1,18		lb 0,55			
		Psi 5075	inch -	1,22	3,23	-		lb 0,55				MPa 35	mm 54,5	100	-	50	N 1	kg 1,25			
QC FF N 1/2 MALE	12,5	MPa 35	mm -	75	24,5	34	N1/2	kg 0,317	NC05N03S000	QC FF N 1,1/4 MALE	25	Psi 5075	inch -	2,95	0,96	1,34		lb 0,70			
		Psi 5075	inch -	2,95	0,96	1,34		lb 0,70				MPa 35	mm -	103	36	50	N 1 1/4	kg 0,696			
QC FF N 1/2 FEMALE	12,5	MPa 35	mm 38	81	-	34	N1/2	kg 0,377	NC06N03S000	QC FF N 1,1/4 FEMALE	25	Psi 5075	inch 1,50	3,19	-	1,34		lb 0,83			
		Psi 5075	inch -	1,50	3,19	-		lb 0,83				MPa 35	mm 54,5	103	-	50	N 1 1/4	kg 1,323			
QC FF N 3/4 MALE	12,5	MPa 35	mm -	78	24,5	34	N3/4	kg 0,291	NC05N03S001	QC FF N 1,1/2 MALE	25	Psi 5075	inch -	3,07	0,96	1,34		lb 0,64			
		Psi 5075	inch -	3,07	0,96	1,34		lb 0,64				MPa 35	mm -	103	36	55	N 1 1/2	kg 0,75			
QC FF N 3/4 FEMALE	12,5	MPa 35	mm 38	84	-	34	N3/4	kg 0,411	NC06N03S001	QC FF N 1,1/2 FEMALE	25	Psi 5075	inch 1,50	3,31	-	1,34		lb 0,91			
		Psi 5075	inch -	1,50	3,31	-		lb 0,91				MPa 35	mm 54,5	103	-	55	N 1 1/2	kg 1,53			
QC FF N 1/2 MALE	16	MPa 25	mm -	82	27	41	N1/2	kg 0,4	NC05NA3S000	QC FF N 1,1/2 MALE	25	Psi 3625	inch -	3,23	1,06	1,61		lb 0,88			
		Psi 3625	inch -	3,23	1,06	1,61		lb 0,88				MPa 25	mm 42	87	41	-	N1/2	kg 0,52			
QC FF N 1/2 FEMALE	16	MPa 25	mm 42	87	41	-	N1/2	kg 0,52	NC06NA3S000	QC FF N 1,1/2 FEMALE	25	Psi 3625	inch 1,65	3,43	1,61	-		lb 1,15			
		Psi 3625	inch -	1,65	3,43	1,61		lb 1,15				MPa 25	mm -	83,5	27	41	N3/4	kg 0,3			
QC FF N 3/4 MALE	16	MPa 25	mm -	83,5	27	41	N3/4	kg 0,3	NC05NA3S001	QC FF N 1,1/2 MALE	25	Psi 3625	inch -	3,29	1,06	1,61		lb 0,66			
		Psi 3625	inch -	3,29	1,06	1,61		lb 0,66				MPa 25	mm 42	91	-	41	N3/4	kg 0,47			
QC FF N 3/4 FEMALE	16	MPa 25	mm 42	91	-	41	N3/4	kg 0,47	NC06NA3S001	QC FF N 1,1/2 FEMALE	25	Psi 3625	inch 1,65	3,58	-	1,61		lb 1,04			
		Psi 3625	inch -	1,65	3,58	-		lb 1,04				MPa 25	mm -	87	27	41	N1	kg 0,45			
QC FF N 1 MALE	16	MPa 25	mm -	87	27	41	N1	kg 0,45	NC05NA3S002	QC FF N 1,1/2 MALE	25	Psi 3625	inch -	3,43	1,06	1,61		lb 0,99			
		Psi 3625	inch -	3,43	1,06	1,61		lb 0,99				MPa 25	mm 42	95	-	41	N1	kg 0,6			
QC FF N 1 FEMALE	16	MPa 25	mm 42	95	-	41	N1	kg 0,6	NC06NA3S002	QC FF N 1,1/2 FEMALE	25	Psi 3625	inch 1,65	3,74	-	1,61		lb 1,32			

ABOVE ISO 25 G 1.1/2": ON REQUEST




## ■ QUICK COUPLINGS ISO 16028 FLAT FACE SAE (QC male / female)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE	CS Carbon Steel								CS Carbon Steel			
											TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE	
QC FF SAE4 MALE	6,3	MPa 35	mm - 48	16,15	24		SAE4	kg 0,09	NC05S010000		QC FF SAE12 MALE	19	MPa 35	mm - 92	29,95	41		SAE12	kg 0,48	NC05S040005	
		Psi 5075	inch - 1,89	0,64	0,94			lb 0,20			Psi 5075		inch - 3,62	1,18	1,61			lb 1,06			
QC FF SAE4 FEMALE		MPa 35	mm 27	61,5	-	24	SAE4	kg 0,151	NC06S010000		QC FF SAE12 FEMALE		MPa 35	mm 45	103	-	41		SAE12	kg 0,78	NC06S040005
		Psi 5075	inch 1,06	2,42	-	0,94		lb 0,33			Psi 5075		inch 1,77	4,06	-	1,61		lb 1,72			
QC FF SAE6 MALE		MPa 35	mm - 49	16,15	24		SAE6	kg 0,22	NC05S010001		QC FF SAE16 MALE	25	MPa 35	mm - 100	36	50		SAE16	kg 0,58	NC05S050002	
		Psi 5075	inch - 1,93	0,64	0,94			lb 0,49			Psi 5075		inch - 3,94	1,42	1,97			lb 1,28			
QC FF SAE6 FEMALE		MPa 35	mm 27	62,5	-	24	SAE6	kg 0,35	NC06S010001		QC FF SAE16 FEMALE		MPa 35	mm 54,5	100	-	50		SAE16	kg 1,25	NC06S050002
		Psi 5075	inch 1,06	2,46	-	0,94		lb 0,77			Psi 5075		inch 2,15	3,94	-	1,97		lb 2,76			
QC FF SAE6 MALE	10	MPa 35	mm - 66,5	19,75	30		SAE6	kg 0,11	NC05S020000		QC FF SAE20 MALE	25	MPa 35	mm - 103	36	50		SAE20	kg 0,696	NC05S060000	
		Psi 5075	inch - 2,62	0,78	1,18			lb 0,24			Psi 5075		inch - 4,06	1,42	1,97			lb 1,53			
QC FF SAE6 FEMALE		MPa 35	mm 31	76	-	30	SAE6	kg 0,29	NC06S020000		QC FF SAE20 FEMALE		MPa 35	mm 54,5	103	-	50		SAE20	kg 1,323	NC06S060000
		Psi 5075	inch 1,22	2,99	-	1,18		lb 0,64			Psi 5075		inch 2,15	4,06	-	1,97		lb 2,92			
QC FF SAE8 MALE	12,5	MPa 35	mm - 69,5	19,75	30		SAE8	kg 0,13	NC05S030000												
		Psi 5075	inch - 2,74	0,78	1,18			lb 0,29													
QC FF SAE8 FEMALE		MPa 35	mm 31	79	-	30	SAE8	kg 0,25	NC06S030000												
		Psi 5075	inch 1,22	3,11	-	1,18		lb 0,55													
QC FF SAE8 MALE	16	MPa 35	mm - 75	24,5	34		SAE8	kg 0,317	NC05S030003												
		Psi 5075	inch - 2,95	0,96	1,34			lb 0,70													
QC FF SAE8 FEMALE		MPa 35	mm 38	81	-	34	SAE8	kg 0,377	NC06S030003												
		Psi 5075	inch 1,50	3,19	-	1,34		lb 0,83													
QC FF SAE12 MALE	16	MPa 35	mm - 80,5	24,5	34		SAE12	kg 0,291	NC05S040000												
		Psi 5075	inch - 3,17	0,96	1,34			lb 0,64													
QC FF SAE12 FEMALE		MPa 35	mm 38	86,5	-	34	SAE12	kg 0,411	NC06S040000												
		Psi 5075	inch 1,50	3,41	-	1,34		lb 0,91													
QC FF SAE8 MALE	16	MPa 35	mm - 80	27	41		SAE8	kg 0,4	NC05S030004												
		Psi 5075	inch - 3,15	1,06	1,61			lb 0,88													
QC FF SAE8 FEMALE		MPa 35	mm 42	87	-	41	SAE8	kg 0,52	NC06S030004												
		Psi 5075	inch 1,65	3,43	-	1,61		lb 1,15													
QC FF SAE12 MALE	16	MPa 35	mm - 85	27	41		SAE12	kg 0,3	NC05S040004												
		Psi 5075	inch - 3,35	1,06	1,61			lb 0,66													
QC FF SAE12 FEMALE		MPa 35	mm 42	93	-	41	SAE12	kg 0,47	NC06S040004												
		Psi 5075	inch 1,65	3,66	-	1,61		lb 1,04													



## QUICK COUPLINGS ISO 16028 FLAT FACE SAE (QC male / female)


TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	SS	ITEM CODE	SS	ITEM CODE								
									Stainless Steel											
QC FF SAE4 MALE	6,3	MPa 35	mm - 48	16,15	24		SAE4	kg 0,09	NC05S01S000	QC FF SAE12 MALE	19	MPa 35	mm - 92	29,95	41	kg 0,48	NC05S04S000			
		Psi 5075	inch - 1,89	0,64	0,94			lb 0,20				Psi 5075	inch - 3,62	1,18	1,61	lb 1,06				
		MPa 35	mm - 27	61,5	-	24		kg 0,151				MPa 35	mm - 45	103	-	41	kg 0,78			
		Psi 5075	inch - 1,06	2,42	-	0,94		lb 0,33				Psi 5075	inch - 1,77	4,06	-	1,61	lb 1,72			
	10	MPa 35	mm - 49	16,15	24		SAE6	kg 0,22	NC05S01S001				MPa 35	mm - 100	36	50	kg 0,58	NC05S05S000		
		Psi 5075	inch - 1,93	0,64	0,94			lb 0,49	Psi 5075			inch - 3,94	1,42	1,97	lb 1,28					
		MPa 35	mm - 27	62,5	-	24		kg 0,35	MPa 35			mm - 54,5	100	-	50	kg 1,25				
		Psi 5075	inch - 1,06	2,46	-	0,94		lb 0,77	Psi 5075			inch - 2,15	3,94	-	1,97	lb 2,76				
QC FF SAE6 FEMALE	6,3	MPa 35	mm - 66,5	19,75	30		SAE6	kg 0,11	NC05S02S000				MPa 35	mm - 103	36	50	kg 0,696	NC05S05S001		
		Psi 5075	inch - 2,62	0,78	1,18			lb 0,24	Psi 5075			inch - 4,06	1,42	1,97	lb 1,53					
		MPa 35	mm - 31	76	-	30		kg 0,29	MPa 35			mm - 54,5	103	-	50	kg 1,323				
		Psi 5075	inch - 1,22	2,99	-	1,18		lb 0,64	Psi 5075			inch - 2,15	4,06	-	1,97	lb 2,92				
	10	MPa 35	mm - 69,5	19,75	30		SAE8	kg 0,13	NC05S02S001				MPa 35	mm - 103	36	50	kg 1,323			
		Psi 5075	inch - 2,74	0,78	1,18			lb 0,29	Psi 5075			inch - 4,06	1,42	1,97	lb 1,53					
		MPa 35	mm - 31	79	-	30		kg 0,25	MPa 35			mm - 54,5	103	-	50	kg 1,323				
		Psi 5075	inch - 1,22	3,11	-	1,18		lb 0,55	Psi 5075			inch - 2,15	4,06	-	1,97	lb 2,92				
QC FF SAE8 FEMALE	12,5	MPa 35	mm - 75	24,5	34		SAE8	kg 0,317	NC05S03S000				MPa 35	mm - 103	36	50	kg 1,323			
		Psi 5075	inch - 2,95	0,96	1,34			lb 0,70	Psi 5075			inch - 4,06	1,42	1,97	lb 1,53					
		MPa 35	mm - 38	81	-	34		kg 0,377	MPa 35			mm - 54,5	103	-	50	kg 1,323				
		Psi 5075	inch - 1,50	3,19	-	1,34		lb 0,83	Psi 5075			inch - 2,15	4,06	-	1,97	lb 2,92				
	16	MPa 35	mm - 80,5	24,5	34		SAE12	kg 0,291	NC05S03S001				MPa 35	mm - 103	36	50	kg 1,323			
		Psi 5075	inch - 3,17	0,96	1,34			lb 0,64	Psi 5075			inch - 4,06	1,42	1,97	lb 1,53					
		MPa 35	mm - 38	86,5	-	34		kg 0,411	MPa 35			mm - 54,5	103	-	50	kg 1,323				
		Psi 5075	inch - 1,50	3,41	-	1,34		lb 0,91	Psi 5075			inch - 2,15	4,06	-	1,97	lb 2,92				
QC FF SAE8 FEMALE	16	MPa 35	mm - 80	27	41		SAE8	kg 0,4	NC05SA3S000				MPa 35	mm - 103	36	50	kg 1,323			
		Psi 5075	inch - 3,15	1,06	1,61			lb 0,88	Psi 5075			inch - 4,06	1,42	1,97	lb 1,53					
		MPa 35	mm - 42	87	-	41		kg 0,52	MPa 35			mm - 54,5	103	-	50	kg 1,323				
	16	Psi 5075	inch - 1,65	3,43	-	1,61		lb 1,15	Psi 5075			inch - 2,15	4,06	-	1,97	lb 2,92				
		MPa 35	mm - 85	27	41		SAE12	kg 0,3	NC05SA3S001				MPa 35	mm - 103	36	50	kg 1,323			
		Psi 5075	inch - 3,35	1,06	1,61			lb 0,66	Psi 5075			inch - 4,06	1,42	1,97	lb 1,53					



## ■ QUICK COUPLINGS ISO 16028 FLAT FACE DIN HEAVY (QC male / female)


**CS**  
Carbon Steel

TYPE	DN	PN	ØA	C	Ød	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC FF 8S MALE	6,3	MPa 35	mm	-	54,5	16,15	24	M16X1,5	5	8	kg 0,232
		Psi 5075	inch	-	2,15	0,64	0,94		0,20	0,31	lb 0,51
QC FF 8S FEMALE		MPa 35	mm	27	68	-	24	M16X1,5	5	8	kg 0,338
		Psi 5075	inch	1,06	2,68	-	0,94		0,20	0,31	lb 0,75
QC FF 12S MALE	10	MPa 35	mm	-	72	19,75	30	M20X1,5	8	12	kg 0,208
		Psi 5075	inch	-	2,83	0,78	1,18		0,31	0,47	lb 0,46
QC FF 12S FEMALE		MPa 35	mm	31	81,5	-	30	M20X1,5	8	12	kg 0,695
		Psi 5075	inch	1,22	3,21	-	1,18		0,31	0,47	lb 1,53
QC FF 16S MALE	16	MPa 35	mm	-	84	27	41	M24X1,5	12	16	kg 0,397
		Psi 5075	inch	-	3,31	1,06	1,61		0,47	0,63	lb 0,88
QC FF 16S FEMALE		MPa 35	mm	42	92	-	41	M24X1,5	12	16	kg 0,72
		Psi 5075	inch	1,65	3,62	-	1,61		0,47	0,63	lb 1,59
QC FF 25S MALE	25	MPa 35	mm	-	105	36	50	M36X2	20	25	kg 0,81
		Psi 5075	inch	-	4,13	1,42	1,97		0,79	0,98	lb 1,79
QC FF 25S FEMALE		MPa 35	mm	54,5	105	-	50	M36X2	20	25	kg 1,16
		Psi 5075	inch	2,15	4,13	-	1,97		0,79	0,98	lb 2,56



## ■ QUICK COUPLINGS ISO 16028 FLAT FACE DIN HEAVY (QC male / female)


TYPE	DN	PN	ØA	C	Ød	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
											SS Stainless Steel
QC FF 8S MALE	6,3	MPa 35	mm 54,5	16,15	24		M16X1,5	5	8	kg 0,232	NC05H01S000
		Psi 5075	inch 0,00	2,15	0,64	0,94		0,20	0,31	lb 0,51	
QC FF 8S FEMALE		MPa 35	mm 27	68	24		M16X1,5	5	8	kg 0,338	NC06H01S000
		Psi 5075	inch 1,06	2,68	0,00	0,94		0,20	0,31	lb 0,75	
QC FF 12S MALE	10	MPa 35	mm 72	19,75	30		M20X1,5	8	12	kg 0,208	NC05H02S000
		Psi 5075	inch 0,00	2,83	0,78	1,18		0,31	0,47	lb 0,46	
QC FF 12S FEMALE		MPa 35	mm 31	81,5	30		M20X1,5	8	12	kg 0,695	NC06H02S000
		Psi 5075	inch 1,22	3,21	0,00	1,18		0,31	0,47	lb 1,53	
QC FF 16S MALE	16	MPa 35	mm 84	27	41		M24X1,5	12	16	kg 0,397	NC05HA3S000
		Psi 5075	inch 0,00	3,31	1,06	1,61		0,47	0,63	lb 0,88	
QC FF 16S FEMALE		MPa 35	mm 42	92	41		M24X1,5	12	16	kg 0,72	NC06HA3S000
		Psi 5075	inch 1,65	3,62	0,00	1,61		0,47	0,63	lb 1,59	
QC FF 25S MALE	25	MPa 35	mm 105	36	50		M36X2	20	25	kg 0,81	NC05H05S000
		Psi 5075	inch 0,00	4,13	1,42	1,97		0,79	0,98	lb 1,79	
QC FF 25S FEMALE		MPa 35	mm 54,5	105	50		M36X2	20	25	kg 1,16	NC06H05S000
		Psi 5075	inch 2,15	4,13	0,00	1,97		0,79	0,98	lb 2,56	



## ■ QUICK COUPLINGS ISO 16028 FLAT FACE DIN LIGHT (QC male / female)


**CS**  
Carbon Steel

TYPE	DN	PN	ØA	C	Ød	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC FF 8L MALE	6.3	MPa 35	mm -	52,5	16,15	24	M14x1,5	6	8	kg 0,153	NC05L010000
		Psi 5075	inch -	2,07	0,64	0,94		0,24	0,31	lb 0,34	
		MPa 35	mm 27	66	-	24	M14x1,5	6	8	kg 0,246	NC06L010000
		Psi 5075	inch 1,06	2,60	-	0,94		0,24	0,31	lb 0,54	
		MPa 35	mm -	53,5	16,15	24	M16x1,5	8	10	kg 0,154	NC05L010001
		Psi 5075	inch -	2,11	0,64	0,94	M16x1,5	0,31	0,39	lb 0,34	NC06L010001
QC FF 10L MALE	10	MPa 35	mm 27	67	-	24	M16x1,5	8	10	kg 0,227	NC05L010001
		Psi 5075	inch 1,06	2,64	-	0,94		0,31	0,39	lb 0,50	
		MPa 35	mm -	71	19,75	30	M16x1,5	8	10	kg 0,18	NC05L020001
		Psi 5075	inch -	2,80	0,78	1,18		0,31	0,39	lb 0,40	
		MPa 35	mm 31	80,5	-	30	M16x1,5	8	10	kg 0,473	NC06L020001
		Psi 5075	inch 1,22	3,17	-	1,18		0,31	0,39	lb 1,04	
QC FF 12L MALE	10	MPa 35	mm -	71	19,75	30	M18X1,5	10	12	kg 0,18	NC05L020002
		Psi 5075	inch -	2,80	0,78	1,18		0,39	0,47	lb 0,40	
		MPa 35	mm 31	80,5	-	30	M18X1,5	10	12	kg 0,469	NC06L020002
		Psi 5075	inch 1,22	3,17	-	1,18		0,39	0,47	lb 1,03	
		MPa 35	mm -	72,1	19,75	30	M22X1,5	12	15	kg 0,184	NC05L020003
		Psi 5075	inch -	2,84	0,78	1,18		0,47	0,59	lb 0,41	
QC FF 15L MALE	12,5	MPa 35	mm 31	81,5	-	30	M22X1,5	12	15	kg 0,477	NC06L020003
		Psi 5075	inch 1,22	3,21	-	1,18		0,47	0,59	lb 1,05	
		MPa 35	mm -	72,1	19,75	34	M18X1,5	10	12	kg 0,376	NC05L030000
		Psi 5075	inch -	2,91	0,96	1,34		0,39	0,47	lb 0,83	
		MPa 35	mm 38	80	-	34	M18X1,5	10	12	kg 0,658	NC06L030000
		Psi 5075	inch 1,50	3,15	-	1,34		0,39	0,47	lb 1,45	
QC FF 15L MALE	12,5	MPa 35	mm -	75	24,5	34	M22X1,5	12	15	kg 0,384	NC05L030001
		Psi 5075	inch -	2,95	0,96	1,34		0,47	0,59	lb 0,85	
		MPa 35	mm 38	81	-	34	M22X1,5	12	15	kg 0,665	NC06L030001
		Psi 5075	inch 1,50	3,19	-	1,34		0,47	0,59	lb 1,47	
		MPa 35	mm -	75	24,5	34	M26X1,5	15	18	kg 0,396	NC05L030002
		Psi 5075	inch -	2,95	0,96	1,34		0,59	0,71	lb 0,87	
QC FF 18L MALE	16	MPa 35	mm 38	81	-	34	M26X1,5	15	18	kg 0,673	NC06L030002
		Psi 5075	inch 1,50	3,19	-	1,34		0,59	0,71	lb 1,48	
		MPa 35	mm -	82	27	41	M26X1,5	15	18	kg 0,342	NC05LA30000
		Psi 5075	inch -	3,23	1,06	1,61		0,59	0,71	lb 0,75	
		MPa 35	mm 42	90	-	41	M26X1,5	15	18	kg 0,649	NC06LA30000
		Psi 5075	inch 1,65	3,54	-	1,61		0,59	0,71	lb 1,43	
QC FF 22L MALE	16	MPa 35	mm -	84	27	41	M30X2	19	22	kg 0,339	NC05LA30001
		Psi 5075	inch -	3,31	1,06	1,61		0,75	0,87	lb 0,75	
		MPa 35	mm 42	92	-	41	M30X2	19	22	kg 0,636	NC06LA30001
		Psi 5075	inch 1,65	3,62	-	1,61		0,75	0,87	lb 1,40	
		MPa 35	mm -	87	29,95	41	M26X1,5	15	18	kg 0,474	NC05L040000
		Psi 5075	inch -	3,43	1,18	1,61		0,59	0,71	lb 1,04	
QC FF 18L FEMALE	19	MPa 35	mm 45	98	-	41	M26X1,5	15	18	kg 0,89	NC06L040000
		Psi 5075	inch 1,77	3,86	-	1,61		0,59	0,71	lb 1,96	
		MPa 35	mm -	89	29,95	41	M30X2	19	22	kg 0,461	NC05L040001
		Psi 5075	inch -	3,50	1,18	1,61		0,75	0,87	lb 1,02	
		MPa 35	mm 45	100	-	41	M30X2	19	22	kg 0,882	NC06L040001
		Psi 5075	inch 1,77	3,94	-	1,61		0,75	0,87	lb 1,94	



## QUICK COUPLINGS ISO 16028 FLAT FACE DIN LIGHT (QC male / female)


TYPE	DN	PN	ØA	C	Ød	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
											SS Stainless Steel
QC FF 8L MALE	6.3	MPa 35	mm -	52,5	16,15	24	M14x1,5	6	8	kg 0,153	NC05L01S000
		Psi 5075	inch -	2,07	0,64	0,94		0,24	0,31	lb 0,34	
		MPa 35	mm 27	66	-	24	M14x1,5	6	8	kg 0,246	NC06L01S000
		Psi 5075	inch 1,06	2,60	-	0,94		0,24	0,31	lb 0,54	
		MPa 35	mm -	53,5	16,15	24	M16x1,5	8	10	kg 0,154	NC05L01S001
		Psi 5075	inch -	2,11	0,64	0,94		0,31	0,39	lb 0,34	
		MPa 35	mm 27	67	-	24	M16x1,5	8	10	kg 0,227	NC06L01S001
		Psi 5075	inch 1,06	2,64	-	0,94		0,31	0,39	lb 0,50	
QC FF 10L MALE	10	MPa 35	mm -	71	19,75	30	M16x1,5	8	10	kg 0,18	NC05L02S001
		Psi 5075	inch -	2,80	0,78	1,18		0,31	0,39	lb 0,40	
		MPa 35	mm 31	80,5	-	30	M16x1,5	8	10	kg 0,473	NC06L02S001
		Psi 5075	inch 1,22	3,17	-	1,18		0,31	0,39	lb 1,04	
		MPa 35	mm -	71	19,75	30	M18X1,5	10	12	kg 0,18	NC05L02S002
		Psi 5075	inch -	2,80	0,78	1,18		0,39	0,47	lb 0,40	
		MPa 35	mm 31	80,5	-	30	M18X1,5	10	12	kg 0,469	NC06L02S002
		Psi 5075	inch 1,22	3,17	-	1,18		0,39	0,47	lb 1,03	
QC FF 15L MALE	12,5	MPa 35	mm -	72,1	19,75	30	M22X1,5	12	15	kg 0,184	NC05L03S003
		Psi 5075	inch -	2,84	0,78	1,18		0,47	0,59	lb 0,41	
		MPa 35	mm 31	81,5	-	30	M22X1,5	12	15	kg 0,477	NC06L02S003
		Psi 5075	inch 1,22	3,21	-	1,18		0,47	0,59	lb 1,05	
		MPa 35	mm -	74	24,5	34	M18X1,5	10	12	kg 0,376	NC05L03S000
		Psi 5075	inch -	2,91	0,96	1,34		0,39	0,47	lb 0,83	
		MPa 35	mm 38	80	-	34	M18X1,5	10	12	kg 0,658	NC06L03S000
		Psi 5075	inch 1,50	3,15	-	1,34		0,39	0,47	lb 1,45	
QC FF 15L MALE	12,5	MPa 35	mm -	75	24,5	34	M22X1,5	12	15	kg 0,384	NC05L03S001
		Psi 5075	inch -	2,95	0,96	1,34		0,47	0,59	lb 0,85	
		MPa 35	mm 38	81	-	34	M22X1,5	12	15	kg 0,665	NC06L03S001
		Psi 5075	inch 1,50	3,19	-	1,34		0,47	0,59	lb 1,47	
		MPa 35	mm -	75	24,5	34	M26X1,5	15	18	kg 0,396	NC05L03S002
		Psi 5075	inch -	2,95	0,96	1,34		0,59	0,71	lb 0,87	
		MPa 35	mm 38	81	-	34	M26X1,5	15	18	kg 0,673	NC06L03S002
		Psi 5075	inch 1,50	3,19	-	1,34		0,59	0,71	lb 1,48	
QC FF 18L MALE	16	MPa 35	mm -	82	27	41	M26X1,5	15	18	kg 0,342	NC05LA3S000
		Psi 5075	inch -	3,23	1,06	1,61		0,59	0,71	lb 0,75	
		MPa 35	mm 42	90	-	41	M26X1,5	15	18	kg 0,649	NC06LA3S000
		Psi 5075	inch 1,65	3,54	-	1,61		0,59	0,71	lb 1,43	
		MPa 35	mm -	84	27	41	M30X2	19	22	kg 0,339	NC05LA3S001
		Psi 5075	inch -	3,31	1,06	1,61		0,75	0,87	lb 0,75	
		MPa 35	mm 42	92	-	41	M30X2	19	22	kg 0,636	NC06LA3S001
		Psi 5075	inch 1,65	3,62	-	1,61		0,75	0,87	lb 1,40	
QC FF 18L MALE	19	MPa 35	mm -	87	29,95	41	M26X1,5	15	18	kg 0,474	NC05L04S000
		Psi 5075	inch -	3,43	1,18	1,61		0,59	0,71	lb 1,04	
		MPa 35	mm 45	98	-	41	M26X1,5	15	18	kg 0,89	NC06L04S000
		Psi 5075	inch 1,77	3,86	-	1,61		0,59	0,71	lb 1,96	
		MPa 35	mm -	89	29,95	41	M30X2	19	22	kg 0,461	NC05L04S001
		Psi 5075	inch -	3,50	1,18	1,61		0,75	0,87	lb 1,02	
		MPa 35	mm 45	100	-	41	M30X2	19	22	kg 0,882	NC06L04S001
		Psi 5075	inch 1,77	3,94	-	1,61		0,75	0,87	lb 1,94	



## ■ QUICK COUPLINGS ISO 16028 FLAT FACE DIN BULKHEAD HEAVY (QC male / female)

**CS**  
Carbon Steel


TYPE	DN	PN	ØA	C	Ød	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC FF 8S BK MALE	6,3	MPa 35	mm -	69,5	16,15	24	M16X1,5	5 0,20	8 0,31	kg 0,254 lb 0,56	NC05I010000
QC FF 8S BK FEMALE		Psi 5075	inch -	2,74	0,64	0,94					NC06I010000
QC FF 12S BK MALE	10	MPa 35	mm 27	83	-	24	M16X1,5	5 0,20	8 0,31	kg 0,359 lb 0,79	NC05I020000
QC FF 12S BK FEMALE		Psi 5075	inch 1,06	3,27	-	0,94					NC06I020000
QC FF 16S BK MALE	12,5	MPa 35	mm -	87	19,75	30	M20X1,5	8 0,31	12 0,47	kg 0,24 lb 0,53	NC05I030000
QC FF 16S BK FEMALE		Psi 5075	inch -	3,43	0,78	1,18					NC06I030000
QC FF 16S BK MALE	16	MPa 35	mm 31	96,5	-	30	M20X1,5	8 0,31	12 0,47	kg 0,726 lb 1,60	NC05IA30000
QC FF 16S BK FEMALE		Psi 5075	inch 1,22	3,80	-	1,18					NC06IA30000
QC FF 20S BK MALE	19	MPa 35	mm -	92	24,5	34	M24X1,5	12 0,47	16 0,63	kg 0,546 lb 1,20	NC05I040000
QC FF 20S BK FEMALE		Psi 5075	inch -	3,62	0,96	1,34					NC06I040000
QC FF 25S BK MALE	25	MPa 35	mm 38	98	-	34	M24X1,5	12 0,47	16 0,63	kg 0,95 lb 2,09	NC05I040001
QC FF 25S BK FEMALE		Psi 5075	inch 1,50	3,86	-	1,34					NC06I040001
QC FFE 25S BK MALE	25	MPa 35	mm -	99	27	41	M24X1,5	12 0,47	16 0,63	kg 0,437 lb 0,96	NC05I050000
QC FFE 25S BK FEMALE		Psi 5075	inch -	3,90	1,06	1,61					NC06I050000
QC FF 20S BK MALE	19	MPa 35	mm 42	107	-	41	M24X1,5	12 0,47	16 0,63	kg 0,76 lb 1,68	NC05IA30000
QC FF 20S BK FEMALE		Psi 5075	inch 1,65	4,21	-	1,61					NC06IA30000
QC FF 25S BK MALE	25	MPa 35	mm -	113	29,95	41	M30X2	16 0,63	20 0,79	kg 0,546 lb 1,20	NC05I040000
QC FF 25S BK FEMALE		Psi 5075	inch -	4,45	1,18	1,61					NC06I040000
QC FF 25S BK MALE	25	MPa 35	mm 45	124	-	41	M30X2	16 0,63	20 0,79	kg 0,957 lb 2,11	NC05I040001
QC FF 25S BK FEMALE		Psi 5075	inch 1,77	4,88	-	1,61					NC06I040001
QC FFE 25S BK MALE	25	MPa 35	mm -	117	29,95	41	M36X2	20 0,79	25 0,98	kg 0,615 lb 1,36	NC05I050000
QC FFE 25S BK FEMALE		Psi 5075	inch -	4,61	1,18	1,61					NC06I050000
QC FFE 25S BK MALE	25	MPa 35	mm 45	128	-	41	M36X2	20 0,79	25 0,98	kg 1,027 lb 2,26	NC06I050000
QC FFE 25S BK FEMALE		Psi 5075	inch 1,77	5,04	-	1,61					NC06I050000



## ■ QUICK COUPLINGS ISO 16028 FLAT FACE DIN BULKHEAD HEAVY (QC male / female)


TYPE	DN	PN	ØA	C	Ød	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC FF 8S BK MALE	6,3	MPa 35	mm -	69,5	16,15	24	M16X1,5	5	8	kg 0,254	NC05I01S000
QC FF 8S BK FEMALE		Psi 5075	inch -	2,74	0,64	0,94		0,20	0,31	lb 0,56	
QC FF 12S BK MALE	10	MPa 35	mm 27	83	-	24	M16X1,5	5	8	kg 0,359	NC06I01S000
QC FF 12S BK FEMALE		Psi 5075	inch 1,06	3,27	-	0,94		0,20	0,31	lb 0,79	
QC FF 16S BK MALE	12,5	MPa 35	mm -	87	19,75	30	M20X1,5	8	12	kg 0,24	NC05I02S000
QC FF 16S BK FEMALE		Psi 5075	inch -	3,43	0,78	1,18		0,31	0,47	lb 0,53	
QC FF 16S BK MALE	16	MPa 35	mm 31	96,5	-	30	M20X1,5	8	12	kg 0,726	NC06I02S000
QC FF 16S BK FEMALE		Psi 5075	inch 1,22	3,80	-	1,18		0,31	0,47	lb 1,60	
QC FF 20S BK MALE	19	MPa 35	mm -	92	24,5	34	M24X1,5	12	16	kg 0,546	NC05I03S000
QC FF 20S BK FEMALE		Psi 5075	inch -	3,62	0,96	1,34		0,47	0,63	lb 1,20	
QC FF 20S BK MALE	25	MPa 35	mm 38	98	-	34	M24X1,5	12	16	kg 0,95	NC06I03S000
QC FF 20S BK FEMALE		Psi 5075	inch 1,50	3,86	-	1,34		0,47	0,63	lb 2,09	
QC FF 25S BK MALE	19	MPa 35	mm -	99	27	41	M24X1,5	12	16	kg 0,437	NC05I04S000
QC FF 25S BK FEMALE		Psi 5075	inch -	3,90	1,06	1,61		0,47	0,63	lb 0,96	
QC FF 25S BK MALE	25	MPa 35	mm 42	107	-	41	M24X1,5	12	16	kg 0,76	NC06I04S000
QC FF 25S BK FEMALE		Psi 5075	inch 1,65	4,21	-	1,61		0,47	0,63	lb 1,68	
QC FFE 25S BK MALE	19	MPa 35	mm -	113	29,95	41	M30X2	16	20	kg 0,546	NC05I04S000
QC FFE 25S BK FEMALE		Psi 5075	inch -	4,45	1,18	1,61		0,63	0,79	lb 1,20	
QC FFE 25S BK MALE	25	MPa 35	mm 45	124	-	41	M30X2	16	20	kg 0,957	NC06I04S000
QC FFE 25S BK FEMALE		Psi 5075	inch 1,77	4,88	-	1,61		0,63	0,79	lb 2,11	
QC FFE 25S BK MALE	19	MPa 35	mm -	117	29,95	41	M36X2	20	25	kg 0,615	NC05I04S001
QC FFE 25S BK FEMALE		Psi 5075	inch -	4,61	1,18	1,61		0,79	0,98	lb 1,36	
QC FFE 25S BK MALE	25	MPa 35	mm 45	128	-	41	M36X2	20	25	kg 1,027	NC06I04S001
QC FFE 25S BK FEMALE		Psi 5075	inch 1,77	5,04	-	1,61		0,79	0,98	lb 2,26	
QC FF 25S BK MALE	19	MPa 35	mm -	128	36	50	M36X2	20	25	kg 0,937	NC05I05S000
QC FF 25S BK FEMALE		Psi 5075	inch -	5,04	1,42	1,97		0,79	0,98	lb 2,07	
QC FF 25S BK MALE	25	MPa 35	mm 54,5	128	-	50	M36X2	20	25	kg 1,28	NC06I05S000
QC FF 25S BK FEMALE		Psi 5075	inch 2,15	5,04	-	1,97		0,79	0,98	lb 2,82	

**SS**  
Stainless Steel



## ■ QUICK COUPLINGS ISO 16028 FLAT FACE DIN BULKHEAD LIGHT (QC male / female)


TYPE	DN	PN	ØA	C	Ød	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
											CS Carbon Steel
QC FF 8L BK MALE	6,3	MPa 35	mm -	67,5	16,15	24	M14x1,5	6	8	kg 0,17	NC05M010000
		Psi 5075	inch -	2,66	0,64	0,94		0,24	0,31	lb 0,37	
		MPa 35	mm 27	81	-	24	M14x1,5	6	8	kg 0,258	NC06M010000
		Psi 5075	inch 1,06	3,19	-	0,94		0,24	0,31	lb 0,57	
		MPa 35	mm -	68,5	16,15	24	M16x1,5	8	10	kg 0,173	NC05M010001
		Psi 5075	inch -	2,70	0,64	0,94	M16x1,5	0,31	0,39	lb 0,38	
QC FF 10L BK MALE	10	MPa 35	mm 27	82	-	24	M16x1,5	8	10	kg 0,261	NC06M010001
		Psi 5075	inch 1,06	3,23	-	0,94		0,31	0,39	lb 0,58	
		MPa 35	mm -	86	19,75	30	M16x1,5	8	10	kg 0,194	NC05M020000
		Psi 5075	inch -	3,39	0,78	1,18		0,31	0,39	lb 0,43	
		MPa 35	mm 31	95,5	-	30	M16x1,5	8	10	kg 0,492	NC06M020000
		Psi 5075	inch 1,22	3,76	-	1,18		0,31	0,39	lb 1,08	
QC FF 12L BK MALE	10	MPa 35	mm -	87	19,75	30	M18X1,5	10	12	kg 0,196	NC05M020001
		Psi 5075	inch -	3,43	0,78	1,18		0,39	0,47	lb 0,43	
		MPa 35	mm 31	96,5	-	30	M18X1,5	10	12	kg 0,49	NC06M020001
		Psi 5075	inch 1,22	3,80	-	1,18		0,39	0,47	lb 1,08	
		MPa 35	mm -	87	19,75	30	M22X1,5	12	15	kg 0,214	NC05M020002
		Psi 5075	inch -	3,43	0,78	1,18		0,47	0,59	lb 0,47	
QC FF 15L BK MALE	12,5	MPa 35	mm 31	96,5	-	30	M22X1,5	12	15	kg 0,503	NC06M020002
		Psi 5075	inch 1,22	3,80	-	1,18		0,47	0,59	lb 1,11	
		MPa 35	mm -	87	19,75	30	M22X1,5	12	15	kg 0,214	NC05M030000
		Psi 5075	inch -	3,43	0,78	1,18		0,47	0,59	lb 0,47	
		MPa 35	mm 31	96,5	-	30	M22X1,5	12	15	kg 0,679	NC06M030000
		Psi 5075	inch 1,22	3,80	-	1,18		0,39	0,47	lb 1,50	
QC FF 12L BK MALE	12,5	MPa 35	mm -	90	24,5	34	M18X1,5	10	12	kg 0,397	NC05M030000
		Psi 5075	inch -	3,54	0,96	1,34		0,39	0,47	lb 0,88	
		MPa 35	mm 38	96	-	34	M18X1,5	10	12	kg 0,679	NC06M030000
		Psi 5075	inch 1,50	3,78	-	1,34		0,39	0,47	lb 1,50	
		MPa 35	mm -	90	24,5	34	M22X1,5	12	15	kg 0,409	NC05M030001
		Psi 5075	inch -	3,54	0,96	1,34		0,47	0,59	lb 0,90	
QC FF 15L BK FEMALE	12,5	MPa 35	mm 38	96	-	34	M22X1,5	12	15	kg 0,691	NC06M030001
		Psi 5075	inch 1,50	3,78	-	1,34		0,47	0,59	lb 1,52	
		MPa 35	mm -	97	27	41	M26X1,5	15	18	kg 0,383	NC05MA30000
		Psi 5075	inch -	3,82	1,06	1,61		0,59	0,71	lb 0,84	
		MPa 35	mm 42	105	-	41	M26X1,5	15	18	kg 0,69	NC06MA30000
		Psi 5075	inch 1,65	4,13	-	1,61		0,59	0,71	lb 1,52	
QC FF 18L BK MALE	16	MPa 35	mm -	102	29,95	41	M26X1,5	15	18	kg 0,509	NC05M040000
		Psi 5075	inch -	4,02	1,18	1,61		0,59	0,71	lb 1,12	
		MPa 35	mm 45	113	-	41	M26X1,5	15	18	kg 0,935	NC06M040000
		Psi 5075	inch 1,77	4,45	-	1,61		0,59	0,71	lb 2,06	
		MPa 35	mm -	109	29,95	41	M30X2	19	22	kg 0,529	NC05M040001
		Psi 5075	inch -	4,29	1,18	1,61		0,75	0,87	lb 1,17	
QC FF 22L BK FEMALE	19	MPa 35	mm 45	120	-	41	M30X2	19	22	kg 0,945	NC06M040001
		Psi 5075	inch 1,77	4,72	-	1,61		0,75	0,87	lb 2,08	



## ■ QUICK COUPLINGS ISO 16028 FLAT FACE DIN BULKHEAD LIGHT (QC male / female)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC FF 8L BK MALE	6,3	MPa 35	mm -	67,5	16,15	24	M14x1,5	6	8	kg 0,17	NC05M01S000
		Psi 5075	inch -	2,66	0,64	0,94		0,24	0,31	lb 0,37	
		MPa 35	mm 27	81	-	24	M14x1,5	6	8	kg 0,258	NC06M01S000
		Psi 5075	inch 1,06	3,19	-	0,94		0,24	0,31	lb 0,57	
		MPa 35	mm -	68,5	16,15	24	M16x1,5	8	10	kg 0,173	NC05M01S001
		Psi 5075	inch -	2,70	0,64	0,94		0,31	0,39	lb 0,38	
		MPa 35	mm 27	82	-	24	M16x1,5	8	10	kg 0,261	NC06M01S001
		Psi 5075	inch 1,06	3,23	-	0,94		0,31	0,39	lb 0,58	
QC FF 10L BK MALE	10	MPa 35	mm -	86	19,75	30	M16x1,5	8	10	kg 0,194	NC05M02S000
		Psi 5075	inch -	3,39	0,78	1,18		0,31	0,39	lb 0,43	
		MPa 35	mm 31	95,5	-	30	M16x1,5	8	10	kg 0,492	NC06M02S000
		Psi 5075	inch 1,22	3,76	-	1,18		0,31	0,39	lb 1,08	
		MPa 35	mm -	87	19,75	30	M18X1,5	10	12	kg 0,196	NC05M02S001
		Psi 5075	inch -	3,43	0,78	1,18		0,39	0,47	lb 0,43	
		MPa 35	mm 31	96,5	-	30	M18X1,5	10	12	kg 0,49	NC06M02S001
		Psi 5075	inch 1,22	3,80	-	1,18		0,39	0,47	lb 1,08	
QC FF 12L BK MALE	12,5	MPa 35	mm -	87	19,75	30	M22X1,5	12	15	kg 0,214	NC05M02S002
		Psi 5075	inch -	3,43	0,78	1,18		0,47	0,59	lb 0,47	
		MPa 35	mm 31	96,5	-	30	M22X1,5	12	15	kg 0,503	NC06M02S002
		Psi 5075	inch 1,22	3,80	-	1,18		0,47	0,59	lb 1,11	
		MPa 35	mm -	90	24,5	34	M18X1,5	10	12	kg 0,397	NC05M03S000
		Psi 5075	inch -	3,54	0,96	1,34		0,39	0,47	lb 0,88	
		MPa 35	mm 38	96	-	34	M18X1,5	10	12	kg 0,679	NC06M03S000
		Psi 5075	inch 1,50	3,78	-	1,34		0,39	0,47	lb 1,50	
QC FF 15L BK MALE	16	MPa 35	mm -	90	24,5	34	M22X1,5	12	15	kg 0,409	NC05M03S001
		Psi 5075	inch -	3,54	0,96	1,34		0,47	0,59	lb 0,90	
		MPa 35	mm 38	96	-	34	M22X1,5	12	15	kg 0,691	NC06M03S001
		Psi 5075	inch 1,50	3,78	-	1,34		0,47	0,59	lb 1,52	
		MPa 35	mm -	97	27	41	M26X1,5	15	18	kg 0,383	NC05MA3S000
		Psi 5075	inch -	3,82	1,06	1,61		0,59	0,71	lb 0,84	
		MPa 35	mm 42	105	-	41	M26X1,5	15	18	kg 0,69	NC06MA3S000
		Psi 5075	inch 1,65	4,13	-	1,61		0,59	0,71	lb 1,52	
QC FF 18L BK MALE	19	MPa 35	mm -	102	29,95	41	M26X1,5	15	18	kg 0,509	NC05M04S000
		Psi 5075	inch -	4,02	1,18	1,61		0,59	0,71	lb 1,12	
		MPa 35	mm 45	113	-	41	M26X1,5	15	18	kg 0,935	NC06M04S000
		Psi 5075	inch 1,77	4,45	-	1,61		0,59	0,71	lb 2,06	
		MPa 35	mm -	109	29,95	41	M30X2	19	22	kg 0,529	NC05M04S001
		Psi 5075	inch -	4,29	1,18	1,61		0,75	0,87	lb 1,17	
		MPa 35	mm 45	120	-	41	M30X2	19	22	kg 0,945	NC06M04S001
		Psi 5075	inch 1,77	4,72	-	1,61		0,75	0,87	lb 2,08	


SS  
Stainless Steel



## ■ QUICK COUPLINGS ISO 16028 FLAT FACE JIC (QC male / female)

**CS**  
Carbon Steel

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE
QC FF 3/8 JIC MALE	6,3	MPa 35	mm -	50	16,15	24	9/16-18UNF	kg 0,153	NC05J010000
QC FF 3/8 JIC FEMALE		Psi 5075	inch -	1,97	0,64	0,94		lb 0,34	
QC FF 3/8 JIC MALE	10	MPa 35	mm 27	63,6	-	24	9/16-18UNF	kg 0,246	NC05J020000
QC FF 3/8 JIC FEMALE		Psi 5075	inch 1,06	2,50	-	0,94		lb 0,54	
QC FF 5/8 JIC MALE	10	MPa 35	mm -	68,2	19,75	30	9/16-18UNF	kg 0,18	NC05J020000
QC FF 5/8 JIC FEMALE		Psi 5075	inch -	2,69	0,78	1,18		lb 0,40	
QC FF 1/2 JIC MALE	12,5	MPa 35	mm 31	77,8	-	30	9/16-18UNF	kg 0,473	NC06J020000
QC FF 1/2 JIC FEMALE		Psi 5075	inch 1,22	3,06	-	1,18		lb 1,04	
QC FF 5/8 JIC MALE	12,5	MPa 35	mm -	73,4	19,75	30	7/8-14UNF	kg 0,18	NC05J020001
QC FF 5/8 JIC FEMALE		Psi 5075	inch -	2,89	0,78	1,18		lb 0,40	
QC FF 1/2 JIC MALE	12,5	MPa 35	mm 31	83	-	30	7/8-14UNF	kg 0,469	NC06J020001
QC FF 1/2 JIC FEMALE		Psi 5075	inch 1,22	3,27	-	1,18		lb 1,03	
QC FF 3/4 JIC MALE	12,5	MPa 35	mm -	70	19,75	30	3/4-16 UNF	kg 0,184	NC05J020002
QC FF 3/4 JIC FEMALE		Psi 5075	inch -	2,76	0,78	1,18		lb 0,41	
QC FF 5/8 JIC MALE	12,5	MPa 35	mm 31	80	-	30	3/4-16 UNF	kg 0,477	NC06J020002
QC FF 5/8 JIC FEMALE		Psi 5075	inch 1,22	3,15	-	1,18		lb 1,05	
QC FF 1/2 JIC MALE	16	MPa 35	mm -	76,2	24,5	34	3/4-16 UNF	kg 0,376	NC05J030000
QC FF 1/2 JIC FEMALE		Psi 5075	inch -	3,00	0,96	1,34		lb 0,83	
QC FF 1/2 JIC MALE	16	MPa 35	mm 38	82,2	-	34	3/4-16 UNF	kg 0,658	NC06J030000
QC FF 1/2 JIC FEMALE		Psi 5075	inch 1,50	3,24	-	1,34		lb 1,45	
QC FF 5/8 JIC MALE	16	MPa 35	mm -	79,3	24,5	34	7/8-14 UNF	kg 0,384	NC05J030001
QC FF 5/8 JIC FEMALE		Psi 5075	inch -	3,12	0,96	1,34		lb 0,85	
QC FF 3/4 JIC MALE	16	MPa 35	mm 38	85,3	-	34	7/8-14 UNF	kg 0,665	NC06J030001
QC FF 3/4 JIC FEMALE		Psi 5075	inch 1,50	3,36	-	1,34		lb 1,47	
QC FF 3/4 JIC MALE	16	MPa 35	mm -	81,9	24,5	34	1-1/16-12	kg 0,396	NC05J030002
QC FF 3/4 JIC FEMALE		Psi 5075	inch -	3,22	0,96	1,34		lb 0,87	
QC FF 1 JIC MALE	16	MPa 35	mm 38	87,9	-	34	1-1/16-12	kg 0,673	NC06J030002
QC FF 1 JIC FEMALE		Psi 5075	inch 1,50	3,46	-	1,34		lb 1,48	
QC FF 1 JIC MALE	16	MPa 35	mm -	83,1	24,5	34	1-5/16-12UN	kg 0,34	NC05J030003
QC FF 1 JIC FEMALE		Psi 5075	inch -	3,27	0,96	1,34		lb 0,75	
"C FF 1 JIC MALE	16	MPa 25	mm -	89	-	34	1-5/16-12UN	kg 0,66	NC06J030003
"C FF 1 JIC FEMALE		Psi 3625	inch 1,50	3,50	-	1,34		lb 1,46	
"C FF 1 JIC MALE	16	MPa 25	mm -	84,3	27	41	1-5/16-12UN	kg 0,342	NC05JA30000
"C FF 1 JIC FEMALE		Psi 3625	inch -	3,32	1,06	1,61		lb 0,75	
"C FF 1 JIC MALE	16	MPa 25	mm 42	92	-	41	1-5/16-12UN	kg 0,649	NC06JA30000
"C FF 1 JIC FEMALE		Psi 3625	inch 1,65	3,62	-	1,61		lb 1,43	



## QUICK COUPLINGS ISO 16028 FLAT FACE JIC (QC male / female)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE	SS Stainless Steel
QC FF 3/8 JIC MALE	6,3	MPa 35	mm -	50	16,15	24	9/16-18UNF	kg 0,153	NC05J01S000	
QC FF 3/8 JIC FEMALE		Psi 5075	inch -	1,97	0,64	0,94		lb 0,34		
QC FF 3/8 JIC MALE	10	MPa 35	mm 27	63,6	-	24	9/16-18UNF	kg 0,246	NC05J02S000	
QC FF 3/8 JIC FEMALE		Psi 5075	inch 1,06	2,50	-	0,94		lb 0,54		
QC FF 3/8 JIC MALE	10	MPa 35	mm -	73,4	19,75	30	9/16-18UNF	kg 0,18	NC05J02S000	
QC FF 3/8 JIC FEMALE		Psi 5075	inch -	2,89	0,78	1,18		lb 0,40		
QC FF 5/8 JIC MALE	10	MPa 35	mm 31	83	-	30	9/16-18UNF	kg 0,473	NC06J02S000	
QC FF 5/8 JIC FEMALE		Psi 5075	inch 1,22	3,27	-	1,18		lb 1,04		
QC FF 5/8 JIC MALE	10	MPa 35	mm -	68,2	19,75	30	7/8-14UNF	kg 0,18	NC05J02S001	
QC FF 5/8 JIC FEMALE		Psi 5075	inch -	2,69	0,78	1,18		lb 0,40		
QC FF 1/2 JIC MALE	10	MPa 35	mm 31	77,8	-	30	7/8-14UNF	kg 0,469	NC06J02S001	
QC FF 1/2 JIC FEMALE		Psi 5075	inch 1,22	3,06	-	1,18		lb 1,03		
QC FF 1/2 JIC MALE	10	MPa 35	mm -	70	19,75	30	3/4-16 UNF	kg 0,184	NC05J02S002	
QC FF 1/2 JIC FEMALE		Psi 5075	inch -	2,76	0,78	1,18		lb 0,41		
QC FF 1/2 JIC MALE	12,5	MPa 35	mm 31	80	-	30	3/4-16 UNF	kg 0,477	NC06J02S002	
QC FF 1/2 JIC FEMALE		Psi 5075	inch 1,22	3,15	-	1,18		lb 1,05		
QC FF 1/2 JIC MALE	12,5	MPa 35	mm -	76,2	24,5	34	3/4-16 UNF	kg 0,376	NC05J03S000	
QC FF 1/2 JIC FEMALE		Psi 5075	inch -	3,00	0,96	1,34		lb 0,83		
QC FF 5/8 JIC MALE	12,5	MPa 35	mm 38	82,2	-	34	3/4-16 UNF	kg 0,658	NC06J03S000	
QC FF 5/8 JIC FEMALE		Psi 5075	inch 1,50	3,24	-	1,34		lb 1,45		
QC FF 3/4 JIC MALE	12,5	MPa 35	mm -	79,3	24,5	34	7/8-14 UNF	kg 0,384	NC05J03S001	
QC FF 3/4 JIC FEMALE		Psi 5075	inch -	3,12	0,96	1,34		lb 0,85		
QC FF 3/4 JIC MALE	12,5	MPa 35	mm 38	85,3	-	34	7/8-14 UNF	kg 0,665	NC06J03S001	
QC FF 3/4 JIC FEMALE		Psi 5075	inch 1,50	3,36	-	1,34		lb 1,47		
QC FF 3/4 JIC MALE	12,5	MPa 35	mm -	81,9	24,5	34	1-1/16-12	kg 0,396	NC05J03S002	
QC FF 3/4 JIC FEMALE		Psi 5075	inch -	3,22	0,96	1,34		lb 0,87		
QC FF 1 JIC MALE	12,5	MPa 35	mm 38	87,9	-	34	1-1/16-12	kg 0,673	NC06J03S002	
QC FF 1 JIC FEMALE		Psi 5075	inch 1,50	3,46	-	1,34		lb 1,48		
QC FF 1 JIC MALE	12,5	MPa 35	mm -	83,1	24,5	34	1-5/16-12UN	kg 0,34	NC05J03S003	
QC FF 1 JIC FEMALE		Psi 5075	inch -	3,27	0,96	1,34		lb 0,75		
QC FF 1 JIC FEMALE	16	MPa 35	mm 38	89	-	34	1-5/16-12UN	kg 0,66	NC06J03S003	
QC FF 1 JIC MALE		Psi 5075	inch 1,50	3,50	-	1,34		lb 1,46		
QC FF 1 JIC MALE	16	16 25	mm -	84,3	27	41	1-5/16-12UN	kg 0,342	NC05JA3S000	
QC FF 1 JIC FEMALE		Psi 3625	inch -	3,32	1,06	1,61		lb 0,75		
QC FF 1 JIC FEMALE	16	MPa 25	mm 42	92	-	41	1-5/16-12UN	kg 0,649	NC06JA3S000	
QC FF 1 JIC FEMALE		Psi 3625	inch 1,65	3,62	-	1,61		lb 1,43		



# FFAP


## QUICK COUPLINGS

**Flat Face high pressure**

Edition. 21.0

### Carbon Steel

- Type: Quick Couplings
- Models: ISO 16028
- Sizes: from DN6 up to DN25
- Pressure: up to PN350

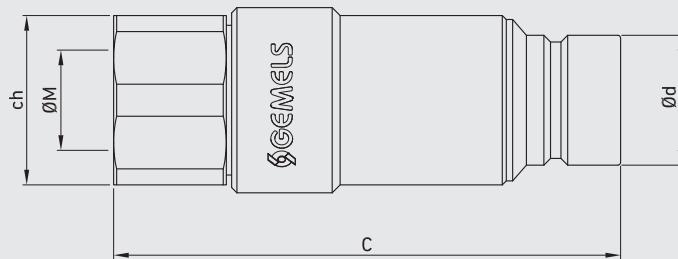


## CODE DESCRIPTION STRUCTURE

QC	1/2	M/F	DN12,5	1	B
Type of coupling					
FFAP FLAT FACE					
Ends					
BSP					
G 1/4					
G 3/8					
G 1/2					
G 1					
G 1-1/4					
MALE					
DN/ISO					
6,3					
10					
12,5					
19					
25					
Body Material					
● 1 = 1,0737					
Seal material					
● B = NBR E = FKM*					



\*On request

- Cups
- Plugs



## QUICK COUPLINGS FFAP FLAT FACE BSP WITH BALL VALVE (QC male)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE	CS Carbon Steel
QC FFAP G 1/4 MALE	6,3	MPa 35 Psi 5075	mm - inch -	76,7 3,02	16,17 0,64	20	G 1/4	kg 0,035 lb 0,08	NC13G010000	
QC FFAP G 3/8 MALE	10	MPa 28 Psi 4060	mm - inch -	78,1 3,07	19,75 0,78	24	G 3/8	kg 0,048 lb 0,11	NC13G020000	
QC FFAP G 1/2 MALE	12,5	MPa 28 Psi 4060	mm - inch -	95,8 3,77	24,54 0,97	32	G 1/2	kg 0,083 lb 0,18	NC13G030000	
QC FFAP G 1 MALE	19	MPa 20 Psi 2900	mm - inch -	113,9 4,48	29,95 1,18	46	G 1	kg 0,256 lb 0,56	NC13G050000	
QC FFAP G 1 1/4 MALE	25	MPa 20 Psi 2900	mm - inch -	123,7 4,87	36,05 1,42	41	G 1 1/4	kg 0,535 lb 1,18	NC13G060000	



# ISO A

## QUICK COUPLINGS

**Available PL version, free flow (without valve) on both sides**


Edition. 21.0

### CS Carbon Steel

- Type: Quick Couplings
- Models: ISO 7241/A
- Sizes: from DN6 to DN50
- Pressure: up to PN350


### SS Stainless Steel

- Type: Quick Couplings
- Models: ISO 7241/A
- Sizes: from DN6 to DN50
- Pressure: up to PN350

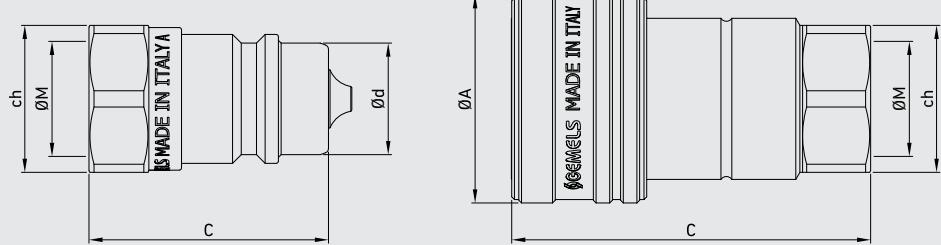


#### Performance

(1/4", 3/8", 1/2", 3/4", 1")  
Series (1/4", 3/8", 1/2", 3/4", 1")  
200SUS (Test Fluid: Oil-200SUS)

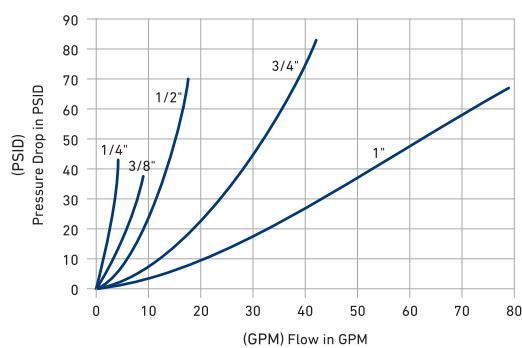

(1 1/4", 1 1/2", 2")  
(1 1/4", 1 1/2", 2")

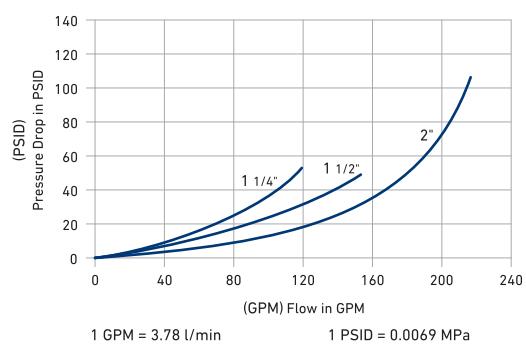



## CODE DESCRIPTION STRUCTURE

QC    G1/2    M/F    DN12,5    1    B

**Type of coupling**

ISO 7241/A

**Ends**

BSP	NPT	SAE
G 1/4	N 1/4	SAE4
G 3/8	N 3/8	SAE6
G 1/2	N 1/2	SAE8
G 3/4	N 3/4	SAE12
G 1	N 1	SAE16
G 1 1/4	N 1 1/4	SAE20
G 1 1/2	N 1 1/2	SAE24
G 2	N 2	SAE32

MALE

FEMALE

**DN/ISO**

6,3  
10  
12,5  
20  
25  
31,5  
40  
50

**Body Material**


- 1 = 1,0737
- 4 = 1,4404

**Seal material**

- B = NBR E = FKM\*
- E = FKM


\*On request

- Cups
- Plugs




## ■ QUICK COUPLINGS ISO 7241/A BSP with poppet (QC male / female)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE	CS Carbon Steel	SS Stainless Steel	ITEM CODE							
QC ISO A G 1/4 MALE	6,3	MPa 35	mm - 35,5	11,86	19		G1/4	kg 0,037	NC01G010000	QC ISO A G 1/4 MALE	6,3	MPa 30	mm - 34	11,8	19	G1/4	kg 0,037	NC01G010001	
Psi 5075		inch - 1,40	0,47	0,75				lb 0,08		Psi 4350		inch - 1,34	0,46	0,75		lb 0,08			
QC ISO A G 1/4 FEMALE	6,3	MPa 35	mm 25	49,6	-	19	G1/4	kg 0,11	NC02G010000	QC ISO A G 1/4 FEMALE		MPa 30	mm 26	58,5	-	19	G1/4	kg 0,11	NC02G010001
Psi 5075		inch 0,98	1,95	-	0,75		G1/4	lb 0,24		Psi 4350		inch 1,02	2,30	-	0,75		lb 0,24		
QC ISO A G 3/8 MALE	10	MPa 35	mm - 39,5	17,3	22		G3/8	kg 0,05	NC01G020000	QC ISO A G 3/8 MALE	10	MPa 25	mm - 40	17,3	22	G3/8	kg 0,05	NC01G02S001	
Psi 5075		inch - 1,56	0,68	0,87			G3/8	lb 0,11		Psi 3625		inch - 1,57	0,68	0,87		lb 0,11			
QC ISO A G 3/8 FEMALE	10	MPa 35	mm 32	57	-	22	G3/8	kg 0,15	NC02G020000	QC ISO A G 3/8 FEMALE		MPa 25	mm 30	64	-	22	G3/8	kg 0,15	NC02G02S001
Psi 5075		inch 1,26	2,24	-	0,87		G3/8	lb 0,33		Psi 3625		inch 1,18	2,52	-	0,87		lb 0,33		
QC ISO A G 1/2 MALE	12,5	MPa 35	mm - 44	20,5	27		G1/2	kg 0,0924	NC01G030000	QC ISO A G 1/2 MALE	12,5	MPa 25	mm - 46	20,5	27	G1/2	kg 0,0924	NC01G030001	
Psi 5075		inch - 1,73	0,81	1,06			G1/2	lb 0,20		Psi 3625		inch - 1,81	0,81	1,06		lb 0,20			
QC ISO A G 1/2 FEMALE	12,5	MPa 35	mm 38,25	66	-	27	G1/2	kg 0,227	NC02G030000	QC ISO A G 1/2 FEMALE		MPa 25	mm 38	73	-	27	G1/2	kg 0,227	NC02G030001
Psi 5075		inch 1,51	2,60	-	1,06		G1/2	lb 0,50		Psi 3625		inch 1,50	2,87	-	1,06		lb 0,50		
QC ISO A G 3/4 MALE	20	MPa 35	mm - 55,5	29,1	34		G3/4	kg 0,2	NC01G040000	QC ISO A G 3/4 MALE	20	MPa 25	mm - 54	29,1	36	G3/4	kg 0,2	NC01G04S001	
Psi 5075		inch - 2,19	1,15	1,34			G3/4	lb 0,44		Psi 3625		inch - 2,13	1,15	1,42		lb 0,44			
QC ISO A G 3/4 FEMALE	20	MPa 35	mm 48	83	-	34	G3/4	kg 0,49	NC02G040000	QC ISO A G 3/4 FEMALE		MPa 25	mm 48	87,5	-	36	G3/4	kg 0,49	NC02G04S001
Psi 5075		inch 1,89	3,27	-	1,34		G3/4	lb 1,08		Psi 3625		inch 1,89	3,44	-	1,42		lb 1,08		
QC ISO A G 1 MALE	25	MPa 35	mm - 66	34,34	41		G 1	kg 0,311	NC01G050000	QC ISO A G 1 MALE	25	MPa 20	mm - 63	34,3	41	G 1	kg 0,311	NC01G050001	
Psi 5075		inch - 2,60	1,35	1,61			G 1	lb 0,69		Psi 2900		inch - 2,48	1,35	1,61		lb 0,69			
QC ISO A G 1 FEMALE	25	MPa 35	mm 56	100	-	41	G 1	kg 0,7825	NC02G050000	QC ISO A G 1 FEMALE		MPa 20	mm 54	103	-	38	G 1	kg 0,7825	NC02G050001
Psi 5075		inch 2,20	3,94	-	1,61		G 1	lb 1,73		Psi 2900		inch 2,13	4,06	-	1,50		lb 1,73		
QC ISO A G 1 1/4 MALE	31,5	MPa 35	mm - 74,8	45	50		G 1 1/4	kg 0,537	NC01G060000	QC ISO A G 1 1/4 MALE	31,5	MPa 10	mm - 69	45	50	G 1 1/4	kg 0,537	NC01G06S001	
Psi 5075		inch - 2,94	1,77	1,97			G 1 1/4	lb 1,18		Psi 1450		inch - 2,72	1,77	1,97		lb 1,18			
QC ISO A G 1 1/4 FEMALE	31,5	MPa 35	mm 71	117,5	-	50	G 1 1/4	kg 1,243	NC02G060000	QC ISO A G 1 1/4 FEMALE		MPa 10	mm 70	115	-	50	G 1 1/4	kg 1,243	NC02G06S001
Psi 5075		inch 2,80	4,63	-	1,97		G 1 1/4	lb 2,74		Psi 1450		inch 2,76	4,53	-	1,97		lb 2,74		
QC ISO A G 1 1/2 MALE	40	MPa 35	mm - 84	55	60		G 1 1/2	kg 0,881	NC01G070000	QC ISO A G 1 1/2 MALE	40	MPa 8	mm - 73	55	60	G 1 1/2	kg 0,881	NC01G07S001	
Psi 5075		inch - 3,31	2,17	2,36			G 1 1/2	lb 1,94		Psi 1160		inch - 2,87	2,17	2,36		lb 1,94			
QC ISO A G 1 1/2 FEMALE	40	MPa 35	mm 86	135	-	60	G 1 1/2	kg 2,126	NC02G070000	QC ISO A G 1 1/2 FEMALE		MPa 8	mm 81	123	-	60	G 1 1/2	kg 2,126	NC02G07S001
Psi 5075		inch 3,39	5,31	-	2,36		G 1 1/2	lb 4,69		Psi 1160		inch 3,19	4,84	-	2,36		lb 4,69		
QC ISO A G 2 MALE	50	MPa 35	mm - 102,5	65,1	75		G 2	kg 1,613	NC01G080000	QC ISO A G 2 MALE	50	MPa 6	mm - 90	65,1	70	G 2	kg 1,613	NC01G08S001	
Psi 5075		inch - 4,04	2,56	2,95			G 2	lb 3,56		Psi 870		inch - 3,54	2,56	2,76		lb 3,56			
QC ISO A G 2 FEMALE	50	MPa 35	mm 103	162,5	-	75	G 2	kg 3,961	NC02G080000	QC ISO A G 2 FEMALE		MPa 6	mm 103	147	-	70	G 2	kg 3,961	NC02G08S001
Psi 5075		inch 4,06	6,40	-	2,95		G 2	lb 8,73		Psi 870		inch 4,06	5,79	-	2,76		lb 8,73		



## QUICK COUPLINGS ISO 7241/A NPT with poppet (QC male / female)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	CS	ITEM CODE	SS	Stainless Steel						
									Carbon Steel									
QC ISO A N 1/4 MALE	6,3	MPa 35	mm - 35,5	11,86	19		N1/4	kg 0,037	NC01N010000	QC ISO A N 1/4 MALE	6,3	MPa 30	mm - 34	11,8	19	N1/4	kg 0,037	NC01N010001
Psi 5075		inch - 1,40	0,47	0,75				lb 0,08		Psi 4350		inch - 1,34	0,46	0,75		lb 0,08		
QC ISO A N 1/4 FEMALE	6,3	MPa 35	mm 25	49,6	-	19		kg 0,11	NC02N010000	QC ISO A N 1/4 FEMALE	6,3	MPa 30	mm 26	58,5	-	19	kg 0,11	NC02N010001
Psi 5075		inch 0,98	1,95	-	0,75		N1/4	lb 0,24		Psi 4350		inch 1,02	2,30	-	0,75	lb 0,24		
QC ISO A N 3/8 MALE	10	MPa 35	mm - 39,5	17,3	22		N3/8	kg 0,05	NC01N020000	QC ISO A N 3/8 MALE	10	MPa 25	mm - 40	17,3	22	N3/8	kg 0,05	NC01N020001
Psi 5075		inch - 1,56	0,68	0,87				lb 0,11		Psi 3625		inch - 1,57	0,68	0,87		lb 0,11		
QC ISO A N 3/8 FEMALE	10	MPa 35	mm 32	57	-	22		kg 0,15	NC02N020000	QC ISO A N 3/8 FEMALE	10	MPa 25	mm 30	64	-	22	kg 0,15	NC02N020001
Psi 5075		inch 1,26	2,24	-	0,87		N3/8	lb 0,33		Psi 3625		inch 1,18	2,52	-	0,87	lb 0,33		
QC ISO A N 1/2 MALE	12,5	MPa 35	mm - 44	20,5	27		N1/2	kg 0,0924	NC01N030000	QC ISO A N 1/2 MALE	12,5	MPa 25	mm - 46	20,5	27	N1/2	kg 0,0924	NC01N030001
Psi 5075		inch - 1,73	0,81	1,06				lb 0,20		Psi 3625		inch - 1,81	0,81	1,06		lb 0,20		
QC ISO A N 1/2 FEMALE	12,5	MPa 35	mm 38,25	66	-	27		kg 0,227	NC02N030000	QC ISO A N 1/2 FEMALE	12,5	MPa 25	mm 38	73	-	27	kg 0,227	NC02N030001
Psi 5075		inch 1,51	2,60	-	1,06		N1/2	lb 0,50		Psi 3625		inch 1,50	2,87	-	1,06	lb 0,50		
QC ISO A N 3/4 MALE	20	MPa 35	mm - 55,5	29,1	34		N3/4	kg 0,2	NC01N040000	QC ISO A N 3/4 MALE	20	MPa 25	mm - 54	29,1	36	N3/4	kg 0,2	NC01N040001
Psi 5075		inch - 2,19	1,15	1,34				lb 0,44		Psi 3625		inch - 2,13	1,15	1,42		lb 0,44		
QC ISO A N 3/4 FEMALE	20	MPa 35	mm 48	83	-	34		kg 0,49	NC02N040000	QC ISO A N 3/4 FEMALE	20	MPa 25	mm 48	87,5	-	36	kg 0,49	NC02N040001
Psi 5075		inch 1,89	3,27	-	1,34		N3/4	lb 1,08		Psi 3625		inch 1,89	3,44	-	1,42	lb 1,08		
QC ISO A N 1 MALE	25	MPa 35	mm - 66	34,34	41		N 1	kg 0,311	NC01N050000	QC ISO A N 1 MALE	25	MPa 20	mm - 63	34,3	41	N 1	kg 0,311	NC01N050001
Psi 5075		inch - 2,60	1,35	1,61				lb 0,69		Psi 2900		inch - 2,48	1,35	1,61		lb 0,69		
QC ISO A N 1 FEMALE	25	MPa 35	mm 56	100	-	41	G 1	kg 0,7825	NC02N050000	QC ISO A N 1 FEMALE	25	MPa 20	mm 54	103	-	38	kg 0,7825	NC02N050001
Psi 5075		inch 2,20	3,94	-	1,61		G 1	lb 1,73		Psi 2900		inch 2,13	4,06	-	1,50	lb 1,73		
QC ISO A N 1 1/4 MALE	31,5	MPa 35	mm - 74,8	45	50		N 1 1/4	kg 0,537	NC01N060000	QC ISO A N 1 1/4 MALE	31,5	MPa 10	mm - 69	45	50	N 1 1/4	kg 0,537	NC01N060001
Psi 5075		inch - 2,94	1,77	1,97				lb 1,18		Psi 1450		inch - 2,72	1,77	1,97		lb 1,18		
QC ISO A N 1 1/4 FEMALE	31,5	MPa 35	mm 71	117,5	-	50		kg 1,243	NC02N060000	QC ISO A N 1 1/4 FEMALE	31,5	MPa 10	mm 70	115	-	50	kg 1,243	NC02N060001
Psi 5075		inch 2,80	4,63	-	1,97			lb 2,74		Psi 1450		inch 2,76	4,53	-	1,97	lb 2,74		
QC ISO A N 1 1/2 MALE	40	MPa 35	mm - 84	55	60		N 1 1/2	kg 0,881	NC01N070000	QC ISO A N 1 1/2 MALE	40	MPa 8	mm - 73	55	60	N 1 1/2	kg 0,881	NC01N070001
Psi 5075		inch - 3,31	2,17	2,36				lb 1,94		Psi 1160		inch - 2,87	2,17	2,36		lb 1,94		
QC ISO A N 1 1/2 FEMALE	40	MPa 35	mm 86	135	-	60	N 1 1/2	kg 2,126	NC02N070000	QC ISO A N 1 1/2 FEMALE	40	MPa 8	mm 81	126	-	60	kg 2,126	NC02N070001
Psi 5075		inch 3,39	5,31	-	2,36			lb 4,69		Psi 1160		inch 3,19	4,96	-	2,36	lb 4,69		
QC ISO A N 2 MALE	50	MPa 35	mm - 102,5	65,1	75		N 2	kg 1,613	NC01N080000	QC ISO A N 2 MALE	50	MPa 6	mm - 90	65,1	70	N 2	kg 1,613	NC01N080001
Psi 5075		inch - 4,04	2,56	2,95				lb 3,56		Psi 870		inch - 3,54	2,56	2,76		lb 3,56		
QC ISO A N 2 FEMALE	50	MPa 35	mm 103	162,5	-	75		kg 3,961	NC02N080000	QC ISO A N 2 FEMALE	50	MPa 6	mm 103	147	-	70	kg 3,961	NC02N080001
Psi 5075		inch 4,06	6,40	-	2,95		N 2	lb 8,73		Psi 870		inch 4,06	5,79	-	2,76	lb 8,73		



## ■ QUICK COUPLINGS ISO 7241/A SAE with poppet (QC male / female)

TYPE	DN	PN	CS						ITEM CODE	SS						ITEM CODE		
			ØA	C	Ød	ch	ØM	WEIGHT		ØA	C	Ød	ch	ØM	WEIGHT			
QC ISO A SAE4 MALE	6,3	MPa 35	mm - 35,5	11,86	19		SAE4	kg 0,037	NC01S010000	QC ISO A SAE4 MALE	6,3	MPa 30	mm - 34	11,8	19	kg 0,037	NC01S01S001	
Psi 5075		inch - 1,40	0,47	0,75				lb 0,08		Psi 4350		inch - 1,34	0,46	0,75	lb 0,08			
QC ISO A SAE4 FEMALE		MPa 35	mm 25	49,6	-	19		kg 0,11	NC02S010000	QC ISO A SAE4 FEMALE		MPa 30	mm 26	58,5	-	19	kg 0,11	NC02S01S001
Psi 5075		inch 0,98	1,95	-	0,75			lb 0,24		Psi 4350		inch 1,02	2,30	-	0,75	lb 0,24		
QC ISO A SAE6 MALE	10	MPa 35	mm - 39,5	17,3	22		SAE6	kg 0,05	NC01S020000	QC ISO A SAE6 MALE	10	MPa 25	mm - 40	17,3	22	kg 0,05	NC01S02S001	
Psi 5075		inch - 1,56	0,68	0,87				lb 0,11		Psi 3625		inch - 1,57	0,68	0,87	lb 0,11			
QC ISO A SAE6 FEMALE		MPa 35	mm 32	57	-	22		kg 0,15	NC02S020000	QC ISO A SAE6 FEMALE		MPa 25	mm 30	64	-	22	kg 0,15	NC02S02S001
Psi 5075		inch 1,26	2,24	-	0,87			lb 0,33		Psi 3625		inch 1,18	2,52	-	0,87	lb 0,33		
QC ISO A SAE8 MALE	12,5	MPa 35	mm - 44	20,5	27		SAE8	kg 0,0924	NC01S030000	QC ISO A SAE8 MALE	12,5	MPa 25	mm - 46	20,5	27	kg 0,0924	NC01S03S001	
Psi 5075		inch - 1,73	0,81	1,06				lb 0,20		Psi 3625		inch - 1,81	0,81	1,06	lb 0,20			
QC ISO A SAE8 FEMALE		MPa 35	mm 38,25	66	-	27		kg 0,227	NC02S030000	QC ISO A SAE8 FEMALE		MPa 25	mm 38	73	-	27	kg 0,227	NC02S03S001
Psi 5075		inch 1,51	2,60	-	1,06			lb 0,50		Psi 3625		inch 1,50	2,87	-	1,06	lb 0,50		
QC ISO A SAE12 MALE	20	MPa 35	mm - 55,5	29,1	34		SAE12	kg 0,2	NC01S040000	QC ISO A SAE12 MALE	20	MPa 25	mm - 54	29,1	36	kg 0,2	NC01S04S001	
Psi 5075		inch - 2,19	1,15	1,34				lb 0,44		Psi 3625		inch - 2,13	1,15	1,42	lb 0,44			
QC ISO A SAE12 FEMALE		MPa 35	mm 48	83	-	34		kg 0,49	NC02S040000	QC ISO A SAE12 FEMALE		MPa 25	mm 48	87,5	-	36	kg 0,49	NC02S04S001
Psi 5075		inch 1,89	3,27	-	1,34			lb 1,08		Psi 3625		inch 1,89	3,44	-	1,42	lb 1,08		
QC ISO A SAE16 MALE	25	MPa 35	mm - 66	34,34	41		SAE16	kg 0,311	NC01S050000	QC ISO A SAE16 MALE	25	MPa 20	mm - 63	34,3	41	kg 0,311	NC01S05S001	
Psi 5075		inch - 2,60	1,35	1,61				lb 0,69		Psi 2900		inch - 2,48	1,35	1,61	lb 0,69			
QC ISO A SAE16 FEMALE		MPa 35	mm 56	100	-	41		kg 0,7825	NC02S050000	QC ISO A SAE16 FEMALE		MPa 20	mm 54	103	-	38	kg 0,7825	NC02S05S001
Psi 5075		inch 2,20	3,94	-	1,61			lb 1,73		Psi 2900		inch 2,13	4,06	-	1,50	lb 1,73		
QC ISO A SAE20 MALE	31,5	MPa 35	mm - 74,8	45	50		SAE20	kg 0,537	NC01S060000	QC ISO A SAE20 MALE	31,5	MPa 10	mm - 69	45	50	kg 0,537	NC01S06S001	
Psi 5075		inch - 2,94	1,77	1,97				lb 1,18		Psi 1450		inch - 2,72	1,77	1,97	lb 1,18			
QC ISO A SAE20 FEMALE		MPa 35	mm 71	117,5	-	50		kg 1,243	NC02S060000	QC ISO A SAE20 FEMALE		MPa 10	mm 70	115	-	50	kg 1,243	NC02S06S001
Psi 5075		inch 2,80	4,63	-	1,97			lb 2,74		Psi 1450		inch 2,76	4,53	-	1,97	lb 2,74		
QC ISO A SAE24 MALE	40	MPa 35	mm - 84	55	60		SAE24	kg 0,881	NC01S070000	QC ISO A SAE24 MALE	40	MPa 8	mm - 73	55	60	kg 0,881	NC01S07S001	
Psi 5075		inch - 3,31	2,17	2,36				lb 1,94		Psi 1160		inch - 2,87	2,17	2,36	lb 1,94			
QC ISO A SAE24 FEMALE		MPa 35	mm 86	135	-	60		kg 2,126	NC02S070000	QC ISO A SAE24 FEMALE		MPa 8	mm 81	126	-	60	kg 2,126	NC02S07S001
Psi 5075		inch 3,39	5,31	-	2,36			lb 4,69		Psi 1160		inch 3,19	4,96	-	2,36	lb 4,69		
QC ISO A SAE32 MALE	50	MPa 35	mm - 102,5	65,1	75		SAE32	kg 1,613	NC01S080000	QC ISO A SAE32 MALE	50	MPa 6	mm - 90	65,1	70	kg 1,613	NC01S08S001	
Psi 5075		inch - 4,04	2,56	2,95				lb 3,56		Psi 870		inch - 3,54	2,56	2,76	lb 3,56			
QC ISO A SAE32 FEMALE		MPa 35	mm 103	162,5	-	75		kg 3,961	NC02S080000	QC ISO A SAE32 FEMALE		MPa 6	mm 103	147	-	70	kg 3,961	NC02S08S001
Psi 5075		inch 4,06	6,40	-	2,95			lb 8,73		Psi 870		inch 4,06	5,79	-	2,76	lb 8,73		





# PUSH-PULL



## QUICK COUPLINGS

Available other different threads on request

Edition. 21.0

### CS Carbon Steel

- Type: Quick Couplings
- Models: ISO 7241/A
- PUSH-PULL
- Sizes: from DN10 up to DN25
- Pressure: up to PN350

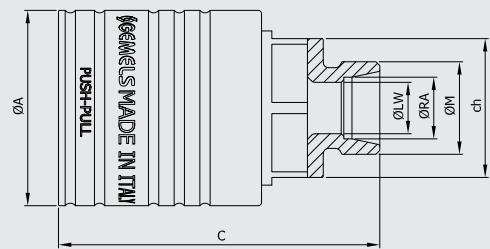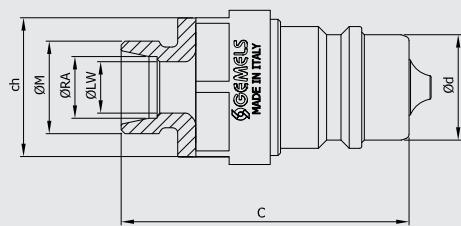



## CODE DESCRIPTION STRUCTURE

QC    1/2    F/M    DN12,5    1    B

Type of coupling

ISO 7241A PP

Ends

BSP	NPT	DIN LIGHT SERIES	DIN HEAVY SERIES	BULKHEAD DIN LIGHT SERIES	BULKHEAD DIN HEAVY SERIES
G3/8		6L	12S	8L	10S
G1/2	N 1/2	8L	16S	10L	12S
G3/4		10L		12L	16S
G1		12L		15L	20S
		15L		18L	
		18L		22L	
		22L		28L	
		28L			

MALE

FEMALE

DN/ISO

10  
12,5  
20  
25

Body Material


● 1 = 1,0737

Seal material

B = NBR E = FKM\*

\*On request

- Cups
- Plugs




Male type see ISO 7241/A

## ■ QUICK COUPLINGS PUSH-PULL BSP (QC female) Interchangeable according to ISO 7241-A

CS  
Carbon Steel

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE
QC PP G 3/8 FEMALE	10	MPa 35	mm 32	60,5	-	24	G3/8	kg 0,26	NC12G020000
		Psi 5075	inch 1,26	2,38	-	0,94		lb 0,57	
	12,5	MPa 35	mm 32	63	-	24	G1/2	kg 0,28	NC12G020001
		Psi 5075	inch 1,26	2,48	-	0,94		lb 0,62	
QC PP G 3/8 FEMALE	12,5	MPa 35	mm 38	65	-	27	G3/8	kg 0,29	NC12G030000
		Psi 5075	inch 1,50	2,56	-	1,06		lb 0,64	
	19	MPa 35	mm 38	67,5	-	27	G1/2	kg 0,31	NC12G030001
		Psi 5075	inch 1,50	2,66	-	1,06		lb 0,68	
QC PP G 3/4 FEMALE	19	MPa 35	mm 47	85,6	-	37	G3/4	kg 0,59	NC12G040000
		Psi 5075	inch 1,85	3,37	-	1,46		lb 1,30	
	25	MPa 35	mm 55	102	-	41	G3/4	kg 0,94	NC12G050000
		Psi 5075	inch 2,17	4,02	-	1,61		lb 2,07	
QC PP G 1 FEMALE	25	MPa 35	mm 55	104	-	41	G1	kg 0,92	NC12G050001
		Psi 5075	inch 2,17	4,09	-	1,61		lb 2,03	




Male type see ISO 7241/A

## ■ QUICK COUPLINGS PUSH-PULL NPT (QC female) Interchangeable according to ISO 7241-A

CS  
Carbon Steel


TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE
QC PP N 1/2 FEMALE	12,5	MPa 35	mm 38	71	-	27	N1/2	kg 0,19	NC12N030001
		Psi 5075	inch 1,50	2,80	-	1,06		lb 0,42	



## QUICK COUPLINGS PUSH-PULL DIN HEAVY (QC male / female) Interchangeable according to ISO 7241-A

**CS**  
Carbon Steel

TYPE	DN	PN	ØA	C	Ød	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC PP 8S MALE	10	MPa 35	mm -	52	17,3	24	M16X1,5	5	8	kg 0,12	NC11H020000
		Psi 5075	inch -	2,05	0,68	0,94		0,20	0,31	lb 0,26	
		MPa 35	mm 32	63	-	24	M16X1,5	5	8	kg 0,321	NC12H020000
		Psi 5075	inch 1,26	2,48	-	0,94		0,20	0,31	lb 0,71	
		MPa 35	mm -	52	17,3	24	M18X1,5	10	7	kg 0,13	NC11H020001
		Psi 5075	inch -	2,05	0,68	0,94		0,39	0,28	lb 0,29	
		MPa 35	mm 32	63	-	24	M18X1,5	10	7	kg 0,324	NC12H020001
		Psi 5075	inch 1,26	2,48	-	0,94		0,39	0,28	lb 0,71	
QC PP 12S MALE	12,5	MPa 35	mm -	57	20,5	27	M20X1,5	8	12	kg 0,135	NC11H030000
		Psi 5075	inch -	2,24	0,81	1,06		0,31	0,47	lb 0,30	
		MPa 35	mm 38	63,5	-	27	M20X1,5	8	12	kg 0,28	NC12H030000
		Psi 5075	inch 1,50	2,50	-	1,06		0,31	0,47	lb 0,62	
		MPa 35	mm -	59	20,5	27	M22X1,5	8	14	kg 0,45	NC11H030001
		Psi 5075	inch -	2,32	0,81	1,06		0,31	0,55	lb 0,99	
		MPa 35	mm 38	65,5	-	27	M22X1,5	8	14	kg 0,281	NC12H030001
		Psi 5075	inch 1,50	2,58	-	1,06		0,31	0,55	lb 0,62	
QC PP 14S MALE	20	MPa 35	mm -	59	20,5	27	M24X1,5	12	16	kg 0,157	NC11H030002
		Psi 5075	inch -	2,32	0,81	1,06		0,47	0,63	lb 0,35	
		MPa 35	mm 38	65,5	-	27	M24X1,5	12	16	kg 0,284	NC12H030002
		Psi 5075	inch 1,50	2,58	-	1,06		0,47	0,63	lb 0,63	
		MPa 35	mm -	64	29	34	M24X1,5	12	16	kg 0,251	NC11H040000
		Psi 5075	inch -	2,52	1,14	1,34		0,47	0,63	lb 0,55	
		MPa 35	mm 47	79,5	-	34	M24X1,5	12	16	kg 0,51	NC12H040000
		Psi 5075	inch 1,85	3,13	-	1,34		0,47	0,63	lb 1,12	
QC PP 20S MALE	25	MPa 35	mm -	66	29	34	M30X2	16	20	kg 0,26	NC11H040001
		Psi 5075	inch -	2,60	1,14	1,34		0,63	0,79	lb 0,57	
		MPa 35	mm 47	81,5	-	34	M30X2	16	20	kg 0,53	NC12H040001
		Psi 5075	inch 1,85	3,21	-	1,34		0,63	0,79	lb 1,17	
		MPa 35	mm -	88,5	34,34	41	M30X2	12	16	kg 0,4	NC11H050000
		Psi 5075	inch -	3,48	1,35	1,61		0,47	0,63	lb 0,88	
		MPa 35	mm 55	104	-	41	M30X2	12	16	kg 0,11	NC12H050000
		Psi 5075	inch 2,17	4,09	-	1,61		0,47	0,63	lb 0,24	
QC PP 25S MALE	30	MPa 35	mm -	90,5	34,34	41	M36X2	16	20	kg 0,56	NC11H050001
		Psi 5075	inch -	3,56	1,35	1,61		0,63	0,79	lb 1,23	
		MPa 35	mm 55	106	-	41	M36X2	16	20	kg 0,123	NC12H050001
		Psi 5075	inch 2,17	4,17	-	1,61		0,63	0,79	lb 0,27	
		MPa 35	mm -	92,5	34,34	46	M42X2	12	16	kg 0,6	NC11H050002
		Psi 5075	inch -	3,64	1,35	1,81		0,47	0,63	lb 1,32	
		MPa 35	mm 55	108	-	46	M42X2	12	16	kg 0,25	NC12H050002
		Psi 5075	inch 2,17	4,25	-	1,81		0,47	0,63	lb 0,55	




## ■ QUICK COUPLINGS PUSH-PULL DIN HEAVY - LIGHT (QC female)

Interchangeable according to ISO 7241-A

CS  
Carbon Steel


TYPE	DN	PN	ØA	C	Ød	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC PP 6L MALE	10	MPa 35	mm	-	50	17,3	24	M12X1,5	4	6	kg 0,07
QC PP 6L FEMALE		Psi 5075	inch	-	1,97	0,68	0,94		0,16	0,24	lb 0,15
QC PP 8L MALE		MPa 35	mm	32	61	-	24	M12X1,5	4	6	kg 0,25
QC PP 8L FEMALE		Psi 5075	inch	1,26	2,40	-	0,94		0,16	0,24	lb 0,55
QC PP 10L MALE		MPa 35	mm	-	50	17,3	24	M14X1,5	6	8	kg 0,13
QC PP 10L FEMALE		Psi 5075	inch	-	1,97	0,68	0,94		0,24	0,31	lb 0,29
QC PP 10L MALE		MPa 35	mm	32	61	-	24	M14X1,5	6	8	kg 0,253
QC PP 10L FEMALE		Psi 5075	inch	1,26	2,40	-	0,94		0,24	0,31	lb 0,56
QC PP 10L MALE	12,5	MPa 35	mm	-	51	17,3	24	M16X1,5	8	10	kg 0,15
QC PP 10L FEMALE		Psi 5075	inch	-	2,01	0,68	0,94		0,31	0,39	lb 0,33
QC PP 10L MALE		MPa 35	mm	32	62	-	24	M16X1,5	8	10	kg 0,255
QC PP 10L FEMALE		Psi 5075	inch	1,26	2,44	-	0,94		0,31	0,39	lb 0,56
QC PP 10L MALE		MPa 35	mm	-	56	20,5	27	M16X1,5	8	10	kg 0,16
QC PP 10L FEMALE		Psi 5075	inch	-	2,20	0,81	1,06		0,31	0,39	lb 0,35
QC PP 12L MALE		MPa 35	mm	38	62,5	-	27	M16X1,5	8	10	kg 0,24
QC PP 12L FEMALE		Psi 5075	inch	1,50	2,46	-	1,06		0,31	0,39	lb 0,53
QC PP 15L MALE	20	MPa 35	mm	-	56	20,5	27	M18X1,5	10	12	kg 0,169
QC PP 15L FEMALE		Psi 5075	inch	-	2,20	0,81	1,06		0,39	0,47	lb 0,37
QC PP 15L MALE		MPa 35	mm	38	62,5	-	27	M18X1,5	10	12	kg 0,254
QC PP 15L FEMALE		Psi 5075	inch	1,50	2,46	-	1,06		0,39	0,47	lb 0,56
QC PP 15L MALE		MPa 35	mm	-	57	20,5	27	M22X1,5	12	15	kg 0,17
QC PP 15L FEMALE		Psi 5075	inch	-	2,24	0,81	1,06		0,47	0,59	lb 0,37
QC PP 18L MALE		MPa 35	mm	38	63,5	-	27	M22X1,5	12	15	kg 0,26
QC PP 18L FEMALE		Psi 5075	inch	1,50	2,50	-	1,06		0,47	0,59	lb 0,57
QC PP 18L MALE	25	MPa 35	mm	-	57	20,5	27	M26X1,5	15	18	kg 0,179
QC PP 18L FEMALE		Psi 5075	inch	-	2,24	0,81	1,06		0,59	0,71	lb 0,39
QC PP 18L MALE		MPa 35	mm	38	63,5	-	27	M26X1,5	15	18	kg 0,263
QC PP 18L FEMALE		Psi 5075	inch	1,50	2,50	-	1,06		0,59	0,71	lb 0,58
QC PP 18L MALE		MPa 35	mm	-	62	29,1	34	M26X1,5	15	18	kg 0,25
QC PP 18L FEMALE		Psi 5075	inch	-	2,44	1,15	1,34		0,59	0,71	lb 0,55
QC PP 22L MALE		MPa 35	mm	47	77,5	-	34	M26X1,5	15	18	kg 0,52
QC PP 22L FEMALE		Psi 5075	inch	1,85	3,05	-	1,34		0,59	0,71	lb 1,15
QC PP 22L MALE	25	MPa 35	mm	-	64	29,1	34	M30X2	19	22	kg 0,27
QC PP 22L FEMALE		Psi 5075	inch	-	2,52	1,15	1,34		0,75	0,87	lb 0,60
QC PP 22L MALE		MPa 35	mm	47	79,5	-	34	M30X2	19	22	kg 0,55
QC PP 22L FEMALE		Psi 5075	inch	1,85	3,13	-	1,34		0,75	0,87	lb 1,21
QC PP 22L MALE		MPa 35	mm	-	86,5	34,34	41	M30X2	19	22	kg 0,4
QC PP 22L FEMALE		Psi 5075	inch	-	3,41	1,35	1,61		0,75	0,87	lb 0,88
QC PP 22L MALE		MPa 35	mm	55	102	-	41	M30X2	19	22	kg 0,89
QC PP 22L FEMALE		Psi 5075	inch	2,17	4,02	-	1,61		0,75	0,87	lb 1,96
QC PP 28L MALE	25	MPa 35	mm	-	86,5	34,34	41	M36X2	24	28	kg 0,45
QC PP 28L FEMALE		Psi 5075	inch	-	3,41	1,35	1,61		0,94	1,10	lb 0,99
QC PP 28L MALE		MPa 35	mm	55	102	-	41	M36X2	24	28	kg 0,895
QC PP 28L FEMALE		Psi 5075	inch	2,17	4,02	-	1,61		0,94	1,10	lb 1,97
QC PP 35L MALE		MPa 35	mm	-	88,5	34,34	46	M45X2	30	35	kg 0,5
QC PP 35L FEMALE		Psi 5075	inch	-	3,48	1,35	1,81		1,18	1,38	lb 1,10
QC PP 35L MALE		MPa 35	mm	55	104	-	46	M45X2	30	35	kg 0,9
QC PP 35L FEMALE		Psi 5075	inch	2,17	4,09	-	1,81		1,18	1,38	lb 1,98



## ■ QUICK COUPLINGS PUSH-PULL DIN BULKHEAD HEAVY (QC male / female) Interchangeable according to ISO 7241-A

CS  
Carbon Steel

TYPE	DN	PN	ØA	C	Ød	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC PP 10S BK MALE	12,5	MPa 35	mm -	72	20,5	27	M18X1,5	7	10	kg 0,169	NC11I030000
		Psi 5075	inch -	2,83	0,81	1,06		0,28	0,39	lb 0,37	
		MPa 35	mm 38	78,5	-	27	M18X1,5	7	10	kg 0,3	NC12I030000
		Psi 5075	inch 1,50	3,09	-	1,06		0,28	0,39	lb 0,66	
		MPa 35	mm -	72	20,5	27	M20X1,5	8	12	kg 0,16	NC11I030001
		Psi 5075	inch -	2,83	0,81	1,06		0,31	0,47	lb 0,35	
		MPa 35	mm 38	78,5	-	27	M20X1,5	8	12	kg 0,32	NC12I030001
		Psi 5075	inch 1,50	3,09	-	1,06		0,31	0,47	lb 0,71	
QC PP 12S BK MALE	16	MPa 35	mm -	74	20,5	27	M24X1,5	12	16	kg 0,172	NC11I030002
		Psi 5075	inch -	2,91	0,81	1,06		0,47	0,63	lb 0,38	
		MPa 35	mm 38	80,5	-	27	M24X1,5	12	16	kg 0,33	NC12I030002
		Psi 5075	inch 1,50	3,17	-	1,06		0,47	0,63	lb 0,73	
		MPa 35	mm -	79	29,1	34	M24X1,5	12	16	kg 0,27	NC11I040000
		Psi 5075	inch -	3,11	1,15	1,34		0,47	0,63	lb 0,60	
		MPa 35	mm 47	94,5	-	34	M24X1,5	12	16	kg 0,57	NC12I040000
		Psi 5075	inch 1,85	3,72	-	1,34		0,47	0,63	lb 1,26	
QC PP 20S BK MALE	20	MPa 35	mm -	77	29,1	34	M30X2	16	20	kg 0,29	NC11I040001
		Psi 5075	inch -	3,03	1,15	1,34		0,63	0,79	lb 0,64	
		MPa 35	mm 47	92,5	-	34	M30X2	16	20	kg 0,6	NC12I040001
		Psi 5075	inch 1,85	3,64	-	1,34		0,63	0,79	lb 1,32	
		MPa 35	mm -	110,5	34,34	41	M30X2	16	20	kg 0,52	NC11I050000
		Psi 5075	inch -	4,35	1,35	1,61		0,63	0,79	lb 1,15	
		MPa 35	mm 55	126	-	41	M30X2	16	20	kg 1,023	NC12I050000
		Psi 5075	inch 2,17	4,96	-	1,61		0,63	0,79	lb 2,26	
QC PP 25S BK MALE	25	MPa 35	mm -	110,5	34,34	41	M36X2	20	25	kg 0,55	NC11I050001
		Psi 5075	inch -	4,35	1,35	1,61		0,79	0,98	lb 1,21	
		MPa 35	mm 55	126	-	41	M36X2	20	25	kg 1,12	NC12I050001
		Psi 5075	inch 2,17	4,96	-	1,61		0,79	0,98	lb 2,47	
		MPa 35	mm -	112,5	34,34	41	M42X2	25	30	kg 0,62	NC11I050002
		Psi 5075	inch -	4,43	1,35	1,61		0,98	1,18	lb 1,37	
		MPa 35	mm 55	128	-	41	M42X2	25	30	kg 1,22	NC12I050002
		Psi 5075	inch 2,17	5,04	-	1,61		0,98	1,18	lb 2,69	



## ■ QUICK COUPLINGS PUSH-PULL DIN BULKHEAD LIGHT (QC male / female) Interchangeable according to ISO 7241-A

**CS**  
Carbon  
Steel

TYPE	DN	PN		ØA	C	Ød	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC PP 8L BK MALE	10	MPa	35	mm	-	65	17,3	24	M14X1,5	6	8	kg 0,12
		Psi	5075	inch	-	2,56	0,68	0,94		0,24	0,31	lb 0,26
		MPa	35	mm	32	76	-	24	M14X1,5	6	8	kg 0,321
		Psi	5075	inch	1,26	2,99	-	0,94		0,24	0,31	lb 0,71
		MPa	35	mm	-	66	17,3	24	M16X1,5	8	10	kg 0,145
		Psi	5075	inch	-	2,60	0,68	0,94		0,31	0,39	lb 0,32
		MPa	35	mm	32	77	-	24	M16X1,5	8	10	kg 0,33
		Psi	5075	inch	1,26	3,03	-	0,94		0,31	0,39	lb 0,73
QC PP 10L BK MALE	12,5	MPa	35	mm	-	71	20,5	27	M16X1,5	8	10	kg 0,149
		Psi	5075	inch	-	2,80	0,81	1,06		0,31	0,39	lb 0,33
		MPa	35	mm	38	77,5	-	27	M16X1,5	8	10	kg 0,3
		Psi	5075	inch	1,50	3,05	-	1,06		0,31	0,39	lb 0,66
		MPa	35	mm	-	72	20,5	27	M18X1,5	10	12	kg 0,15
		Psi	5075	inch	-	2,83	0,81	1,06		0,39	0,47	lb 0,33
		MPa	35	mm	38	78,5	-	27	M18X1,5	10	12	kg 0,3
		Psi	5075	inch	1,50	3,09	-	1,06		0,39	0,47	lb 0,66
QC PP 12L BK MALE	15	MPa	35	mm	-	72	20,5	27	M22X1,5	12	15	kg 0,16
		Psi	5075	inch	-	2,83	0,81	1,06		0,47	0,59	lb 0,35
		MPa	35	mm	38	78,5	-	27	M22X1,5	12	15	kg 0,31
		Psi	5075	inch	1,50	3,09	-	1,06		0,47	0,59	lb 0,68
		MPa	35	mm	-	72	20,5	27	M26X1,5	15	18	kg 0,175
		Psi	5075	inch	-	2,83	0,81	1,06		0,59	0,71	lb 0,39
		MPa	35	mm	38	78,5	-	27	M26X1,5	15	18	kg 0,33
		Psi	5075	inch	1,50	3,09	-	1,06		0,59	0,71	lb 0,73
QC PP 15L BK MALE	20	MPa	35	mm	-	77	29,1	34	M22X1,5	12	15	kg 0,252
		Psi	5075	inch	-	3,03	1,15	1,34		0,47	0,59	lb 0,56
		MPa	35	mm	47	92,5	-	34	M22X1,5	12	15	kg 0,55
		Psi	5075	inch	1,85	3,64	-	1,34		0,47	0,59	lb 1,21
		MPa	35	mm	-	77	29,1	34	M26X1,5	15	18	kg 0,246
		Psi	5075	inch	-	3,03	1,15	1,34		0,59	0,71	lb 0,54
		MPa	35	mm	47	92,5	-	34	M26X1,5	15	18	kg 0,56
		Psi	5075	inch	1,85	3,64	-	1,34		0,59	0,71	lb 1,23
QC PP 22L BK MALE	25	MPa	35	mm	-	84	29,1	34	M30X2	19	22	kg 0,298
		Psi	5075	inch	-	3,31	1,15	1,34		0,75	0,87	lb 0,66
		MPa	35	mm	47	99,5	-	34	M30X2	19	22	kg 0,6
		Psi	5075	inch	1,85	3,92	-	1,34		0,75	0,87	lb 1,32
		MPa	35	mm	-	106,5	34,34	41	M30X2	19	22	kg 0,55
		Psi	5075	inch	-	4,19	1,35	1,61		0,75	0,87	lb 1,21
		MPa	35	mm	55	122	-	41	M30X2	19	22	kg 0,98
		Psi	5075	inch	2,17	4,80	-	1,61		0,75	0,87	lb 2,16
QC PP 28L BK MALE	32	MPa	35	mm	-	106,5	34,34	41	M36X2	24	28	kg 0,569
		Psi	5075	inch	-	4,19	1,35	1,61		0,94	1,10	lb 1,25
		MPa	35	mm	55	122	-	41	M36X2	24	28	kg 1
		Psi	5075	inch	2,17	4,80	-	1,61		0,94	1,10	lb 2,20





# ISO B

## QUICK COUPLINGS


Edition. 21.0

### CS Carbon Steel

- Type: Quick Couplings
- Models: ISO 7241/B
- Sizes: from DN6 to DN50
- Pressure: up to PN350

### SS Stainless Steel

- Type: Quick Couplings
- Models: ISO 7241/B
- Sizes: from DN6 to DN50
- Pressure: up to PN350

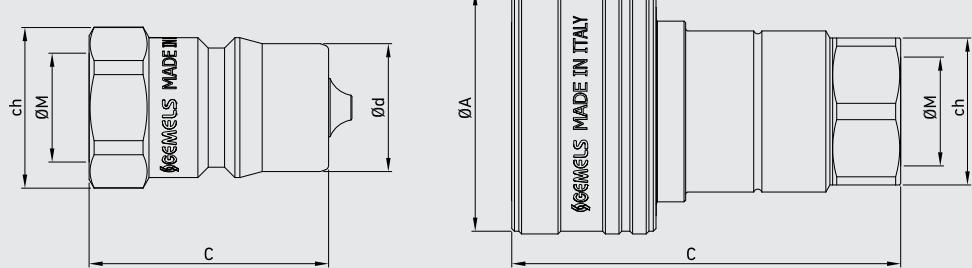


#### Performance

(1/4", 3/8", 1/2", 3/4", 1")

Series (1/4", 3/8", 1/2", 3/4", 1")

200SUS (Test Fluid: Oil-200SUS)

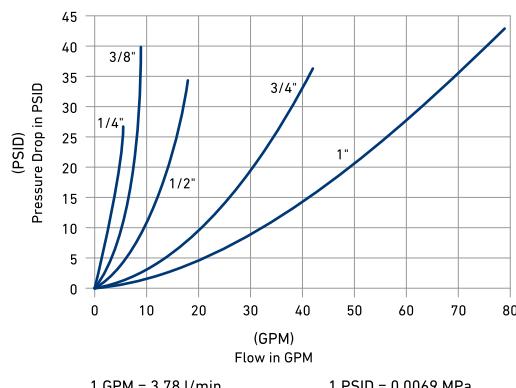



## CODE DESCRIPTION STRUCTURE

QC G1/2 M/F DN12,5 1 B

Type of coupling

ISO 7241/B

Ends

BSP	NPT	SAE
G 1/8	N 1/8	SAE4
G 1/4	N 1/4	SAE6
G 3/8	N 3/8	SAE8
G 1/2	N 1/2	SAE12
G 3/4	N 3/4	SAE16
G 1	N 1	SAE20
G 1 1/2	N 1 1/2	SAE24
G 2	N 2	SAE32

MALE

FEMALE

DN/ISO

5		
6,3		
10		
12,5	Carbon steel	Stainless steel
20		
25		
40		
50		

Body Material


- 1 = 1,0737
- 4 = 1,4404

Seal material

- B = NBR E = FKM\*
- E = FKM

\*On request


- Cups
- Plugs



## ■ QUICK COUPLINGS ISO 7241/B BSP with poppet (QC male / female)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE	CS Carbon Steel		SS Stainless Steel						
										TYPE	DN	PN	ØA					
QC ISO B G 1/4 MALE	6,3	MPa 35	mm - 35,5	14,2	19		G1/4	kg 0,036	NC03G010000	QC ISO B G 1/8 MALE	5	MPa 30	mm - 31	10,8	14	G1/8	kg 0,02	NC03G000001
Psi 5075		inch - 1,40	0,56	0,75				lb 0,08		Psi 4350		inch - 1,22	0,43	0,55		lb 0,04		
QC ISO B G 1/4 FEMALE	6,3	MPa 35	mm 28,5	56	-	19	G1/4	kg 0,128	NC04G010000	QC ISO B G 1/8 FEMALE		MPa 30	mm 24	50	-	14	kg 0,07	NC04G000001
Psi 5075		inch 1,12	2,20	-	0,75			lb 0,28		Psi 4350		inch 0,94	1,97	-	0,55	lb 0,15		
QC ISO B G 3/8 MALE	10	MPa 35	mm - 39	19,05	22		G3/8	kg 0,07	NC03G020000	QC ISO B G 1/4 MALE	6,3	MPa 30	mm - 37	14,1	19	G1/4	kg 0,036	NC03G010001
Psi 5075		inch - 1,54	0,75	0,87				lb 0,15		Psi 4350		inch - 1,46	0,56	0,75		lb 0,08		
QC ISO B G 3/8 FEMALE	10	MPa 35	mm 35	63	-	22	G3/8	kg 0,217	NC04G020000	QC ISO B G 1/4 FEMALE		MPa 30	mm 28	58,5	-	19	kg 0,128	NC04G010001
Psi 5075		inch 1,38	2,48	-	0,87			lb 0,48		Psi 4350		inch 1,10	2,30	-	0,75	lb 0,28		
QC ISO B G 1/2 MALE	12,5	MPa 35	mm - 44	23,5	27		G1/2	kg 0,11	NC03G030000	QC ISO B G 3/8 MALE	10	MPa 25	mm - 39	19	22	G3/8	kg 0,07	NC03G020001
Psi 5075		inch - 1,73	0,93	1,06				lb 0,24		Psi 3625		inch - 1,54	0,75	0,87		lb 0,15		
QC ISO B G 1/2 FEMALE	12,5	MPa 35	mm 45	71,5	-	27	G1/2	kg 0,36	NC04G030000	QC ISO B G 3/8 FEMALE		MPa 25	mm 35	64	-	22	kg 0,217	NC04G020001
Psi 5075		inch 1,77	2,81	-	1,06			lb 0,79		Psi 3625		inch 1,38	2,52	-	0,87	lb 0,48		
QC ISO B G 3/4 MALE	20	MPa 35	mm - 55,5	31,45	36		G3/4	kg 0,22	NC03G040000	QC ISO B G 1/2 MALE	12,5	MPa 25	mm - 45,5	23,5	27	G1/2	kg 0,11	NC03G030001
Psi 5075		inch - 2,19	1,24	1,42				lb 0,49		Psi 3625		inch - 1,79	0,93	1,06		lb 0,24		
QC ISO B G 3/4 FEMALE	20	MPa 35	mm 55	90	-	36	G3/4	kg 0,668	NC04G040000	QC ISO B G 1/2 FEMALE		MPa 25	mm 42	73	-	27	kg 0,36	NC04G030001
Psi 5075		inch 2,17	3,54	-	1,42			lb 1,47		Psi 3625		inch 1,65	2,87	-	1,06	lb 0,79		
QC ISO B G 1 MALE	25	MPa 35	mm - 66	37,8	41		G1	kg 0,3466	NC03G050000	QC ISO B G 3/4 MALE	20	MPa 25	mm - 54	31,4	36	G3/4	kg 0,22	NC03G040001
Psi 5075		inch - 2,60	1,49	1,61				lb 0,76		Psi 3625		inch - 2,13	1,24	1,42		lb 0,49		
QC ISO B G 1 FEMALE	25	MPa 35	mm 63	106	-	41	G1	kg 1,005	NC04G050000	QC ISO B G 3/4 FEMALE		MPa 25	mm 52	87,5	-	36	kg 0,668	NC04G040001
Psi 5075		inch 2,48	4,17	-	1,61			lb 2,22		Psi 3625		inch 2,05	3,44	-	1,42	lb 1,47		
QC ISO B G 1 MALE	31,5	MPa 20	mm - 63	37,8	41		G1	kg 0,3466	NC03G050001	QC ISO B G 1 MALE	25	MPa 20	mm - 63	37,8	41	G1	kg 0,3466	NC03G050001
Psi 2900		inch - 2,48	1,49	1,61				lb 0,76		Psi 2900		inch 2,36	4,06	-	1,61	lb 2,22		
QC ISO B G 1 FEMALE	31,5	MPa 20	mm 60	103	-	41	G1	kg 1,005	NC04G050001	QC ISO B G 1 1/4 MALE	31,5	MPa 14	mm - 126	44,5	65	G1 1/4	kg -	NC03G065000
Psi 2900		inch 2,36	4,06	-	1,61			lb 2,22		Psi 2030		inch - 4,96	1,75	2,56				
QC ISO B G 1 1/4 FEMALE	31,5	MPa 14	mm 74,8	126	-	65	G1 1/4	kg -	NC04G065000	QC ISO B G 1 1/4 FEMALE		MPa 14	mm 74,8	126	-	65	kg -	NC04G065000
Psi 2030		inch 2,94	4,96	-	2,56			lb -		Psi 2030		inch - 4,96	1,75	2,56				
QC ISO B G 1 1/2 MALE	40	MPa 14	mm - 126	44,5	65		G1 1/2	kg -	NC03G075000	QC ISO B G 1 1/2 MALE	40	MPa 14	mm 74,8	126	-	65	kg -	NC04G075000
Psi 2030		inch - 4,96	1,75	2,56				lb -		Psi 2030		inch 2,94	4,96	-	2,56	kg -	NC04G075000	
QC ISO B G 1 1/2 FEMALE	50	MPa 14	mm 74,8	126	-	65	G1 1/2	kg -	NC04G075000	QC ISO B G 2 MALE	50	MPa 9	mm - 142	63,2	90	G 2	kg -	NC03G085000
Psi 2030		inch 2,94	4,96	-	2,56			lb -		Psi 1305		inch - 5,59	2,49	3,54		lb -		
QC ISO B G 2 FEMALE	50	MPa 9	mm 105	142	-	90	G 2	kg -	NC03G085000	QC ISO B G 2 FEMALE		MPa 9	mm 105	142	-	90	kg -	NC04G085000
Psi 1305		inch 4,13	5,59	-	3,54			lb -		Psi 1305		inch - 5,59	2,49	3,54		lb -		


ABOVE 1": \*ON REQUEST



## QUICK COUPLINGS ISO 7241/B NPT with poppet (QC male / female)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	CS	ITEM CODE	SS	Stainless Steel	ITEM CODE						
									Carbon Steel										
QC ISO B N 1/4 MALE	6,3	MPa 35	mm - 35,5	14,2	19		N1/4	kg 0,036	NC03N010000	QC ISO B N 1/8 MALE	5	MPa 30	mm - 31	10,8	14	N1/8	kg 0,02	NC03N00S000	
		Psi 5075	inch - 1,40	0,56	0,75			lb 0,08				Psi 4350	inch - 1,22	0,43	0,55		lb 0,04		
QC ISO B N 1/4 FEMALE		MPa 35	mm 28,5	56	-	19		kg 0,128	NC04N010000	QC ISO B N 1/8 FEMALE	6,3	MPa 30	mm 24	50	-	14	kg 0,07	NC04N00S000	
		Psi 5075	inch 1,12	2,20	-	0,75	N1/4	lb 0,28				Psi 4350	inch 0,94	1,97	-	0,55	lb 0,15		
QC ISO B N 3/8 MALE	10	MPa 35	mm - 39	19,05	22		N3/8	kg 0,07	NC03N020000	QC ISO B N 1/4 MALE	6,3	MPa 30	mm - 37	14,1	19	N1/4	kg 0,036	NC03N01S000	
		Psi 5075	inch - 1,54	0,75	0,87			lb 0,15				Psi 4350	inch - 1,46	0,56	0,75		lb 0,08		
QC ISO B N 3/8 FEMALE		MPa 35	mm 35	63	-	22		kg 0,217	NC04N020000	QC ISO B N 1/4 FEMALE	6,3	MPa 30	mm 28	58,5	-	19	kg 0,128	NC04N01S000	
		Psi 5075	inch 1,38	2,48	-	0,87	N3/8	lb 0,48				Psi 4350	inch 1,10	2,30	-	0,75	lb 0,28		
QC ISO B N 1/2 MALE	12,5	MPa 35	mm - 44	23,5	27		N1/2	kg 0,11	NC03N030000	QC ISO B N 3/8 MALE	10	MPa 25	mm - 39	19	22	N3/8	kg 0,07	NC03N02S000	
		Psi 5075	inch - 1,73	0,93	1,06			lb 0,24				Psi 3625	inch - 1,54	0,75	0,87		lb 0,15		
QC ISO B N 1/2 FEMALE		MPa 35	mm 45	71,5	-	27		kg 0,36	NC04N030000	QC ISO B N 3/8 FEMALE	12,5	MPa 25	mm 35	64	-	22	kg 0,217	NC04N02S000	
		Psi 5075	inch 1,77	2,81	-	1,06	N1/2	lb 0,79				Psi 3625	inch 1,38	2,52	-	0,87	lb 0,48		
QC ISO B N 3/4 MALE	20	MPa 35	mm - 55,5	31,45	36		N3/4	kg 0,22	NC03N040000	QC ISO B N 1/2 MALE	12,5	MPa 25	mm - 45,5	23,5	27	N1/2	kg 0,11	NC03N03S000	
		Psi 5075	inch - 2,19	1,24	1,42			lb 0,49				Psi 3625	inch - 1,79	0,93	1,06		lb 0,24		
QC ISO B N 3/4 FEMALE		MPa 35	mm 55	90	-	36		kg 0,668	NC04N040000	QC ISO B N 1/2 FEMALE	12,5	MPa 25	mm 42	72	-	27	kg 0,36	NC04N03S000	
		Psi 5075	inch 2,17	3,54	-	1,42	N3/4	lb 1,47				Psi 3625	inch 1,65	2,83	-	1,06	lb 0,79		
QC ISO B N 1 MALE	25	MPa 35	mm - 66	37,8	41		N1	kg 0,3466	NC03N050000	QC ISO B N 3/4 MALE	20	MPa 25	mm - 54	31,4	36	N3/4	kg 0,22	NC03N04S000	
		Psi 5075	inch - 2,60	1,49	1,61			lb 0,76				Psi 3625	inch - 2,13	1,24	1,42		lb 0,49		
QC ISO B N 1 FEMALE		MPa 35	mm 63	106	-	41		kg 1,005	NC04N050000	QC ISO B N 3/4 FEMALE	20	MPa 25	mm 52	87,5	-	36	kg 0,668	NC04N04S000	
		Psi 5075	inch 2,48	4,17	-	1,61	N1	lb 2,22				Psi 3625	inch 2,05	3,44	-	1,42	lb 1,47		
QC ISO B N 1	25	MPa 20	mm - 63	37,8	41				NC03N05S000	QC ISO B N 1	25	MPa 20	mm - 63	37,8	41	N1	kg 0,3466	NC04N05S000	
		Psi 2900	inch - 2,48	1,49	1,61			lb 0,76				Psi 2900	inch 2,36	4,06	-	1,61	lb 2,22		
QC ISO B N 1		MPa 20	mm 60	103	-	41			NC04N05S000	QC ISO B N 1 1/4 MALE	31,5	MPa 14	mm - 126	44,5	65	N1 1/4	kg -	NC03N06S000	
		Psi 2900	inch 2,36	4,06	-	1,61						Psi 2030	inch 4,96	1,75	2,56		lb -		
QC ISO B N 1 1/4 FEMALE		MPa 14	mm 74,8	126	-	65			NC04N06S000	QC ISO B N 1 1/4 FEMALE	31,5	MPa 14	mm 2,94	4,96	-	2,56	kg -		
		Psi 2030	inch 4,96	1,75	-	2,56						Psi 2030	inch 2,94	4,96	-	2,56	lb -		
QC ISO B N 1 1/2 MALE	40	MPa 14	mm - 126	44,5	65				NC03N07S000	QC ISO B N 1 1/2 FEMALE	40	MPa 14	mm 74,8	126	-	65	N1 1/2	kg -	NC04N07S000
		Psi 2030	inch 4,96	1,75	2,56							Psi 2030	inch 2,94	4,96	-	2,56	lb -		
QC ISO B N 2 MALE	50	MPa 9	mm - 142	63,2	90				NC03N08S000	QC ISO B N 2 FEMALE	50	MPa 9	mm 105	142	-	90	N 2	kg -	NC04N08S000
		Psi 1305	inch 5,59	2,49	3,54							Psi 1305	inch 4,13	5,59	-	3,54	lb -		

ABOVE 1": \*ON REQUEST



## ■ QUICK COUPLINGS ISO 7241/B SAE with poppet (QC male / female)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE	CS	SS	Stainless Steel							
										Carbon Steel									
QC ISO B SAE4 MALE	6,3	MPa 35	mm - 35,5	14,2	19		SAE4	kg 0,036	NC03S010000	QC ISO B SAE4 MALE	6,3	MPa 30	mm - 37	14,1	19	SAE4	kg 0,036	NC03S01S000	
Psi 5075		inch - 1,40	0,56	0,75				lb 0,08		Psi 4350		inch - 1,46	0,56	0,75		lb 0,08			
QC ISO B SAE4 FEMALE		MPa 35	mm 28,5	56	-	19		kg 0,128	NC04S010000	QC ISO B SAE4 FEMALE		MPa 30	mm 28	58,5	-	19	SAE4	kg 0,128	NC04S01S000
Psi 5075		inch 1,12	2,20	-	0,75			lb 0,28		Psi 4350		inch 1,10	2,30	-	0,75		lb 0,28		
QC ISO B SAE6 MALE	10	MPa 35	mm - 39	19,05	22		SAE6	kg 0,07	NC03S020000	QC ISO B SAE6 MALE	10	MPa 25	mm - 39	19	22	SAE6	kg 0,07	NC03S02S000	
Psi 5075		inch - 1,54	0,75	0,87				lb 0,15		Psi 3625		inch - 1,54	0,75	0,87		lb 0,15			
QC ISO B SAE6 FEMALE		MPa 35	mm 35	63	-	22		kg 0,217	NC04S020000	QC ISO B SAE6 FEMALE		MPa 25	mm 35	64	-	22	SAE6	kg 0,217	NC04S02S000
Psi 5075		inch 1,38	2,48	-	0,87			lb 0,48		Psi 3625		inch 1,38	2,52	-	0,87		lb 0,48		
QC ISO B SAE8 MALE	12,5	MPa 35	mm - 44	23,5	27		SAE8	kg 0,11	NC03S030000	QC ISO B SAE8 MALE	12,5	MPa 25	mm - 45,5	23,5	27	SAE8	kg 0,11	NC03S03S000	
Psi 5075		inch - 1,73	0,93	1,06				lb 0,24		Psi 3625		inch - 1,79	0,93	1,06		lb 0,24			
QC ISO B SAE8 FEMALE		MPa 35	mm 45	71,5	-	27		kg 0,36	NC04S030000	QC ISO B SAE8 FEMALE		MPa 25	mm 42	72	-	27	SAE8	kg 0,36	NC04S03S000
Psi 5075		inch 1,77	2,81	-	1,06			lb 0,79		Psi 3625		inch 1,65	2,83	-	1,06		lb 0,79		
QC ISO B SAE12 MALE	20	MPa 35	mm - 55,5	31,45	36		SAE12	kg 0,22	NC03S040000	QC ISO B SAE12 MALE	20	MPa 25	mm - 54	31,4	36	SAE12	kg 0,22	NC03S04S000	
Psi 5075		inch - 2,19	1,24	1,42				lb 0,49		Psi 3625		inch - 2,13	1,24	1,42		lb 0,49			
QC ISO B SAE12 FEMALE		MPa 35	mm 55	90	-	36		kg 0,668	NC04S040000	QC ISO B SAE12 FEMALE		MPa 25	mm 52	87,5	-	36	SAE12	kg 0,668	NC04S04S000
Psi 5075		inch 2,17	3,54	-	1,42			lb 1,47		Psi 3625		inch 2,05	3,44	-	1,42		lb 1,47		
QC ISO B SAE16 MALE	25	MPa 35	mm - 66	37,8	41		SAE16	kg 0,3466	NC03S050000	QC ISO B SAE16 MALE	25	MPa 20	mm - 63	37,8	41	SAE16	kg 0,3466	NC03S05S000	
Psi 5075		inch - 2,60	1,49	1,61				lb 0,76		Psi 2900		inch - 2,48	1,49	1,61		lb 0,76			
QC ISO B SAE16 FEMALE		MPa 35	mm 63	106	-	41		kg 1,005	NC04S050000	QC ISO B SAE16 FEMALE		MPa 20	mm 60	103	-	41	SAE16	kg 1,005	NC04S05S000
Psi 5075		inch 2,48	4,17	-	1,61			lb 2,22		Psi 2900		inch 2,36	4,06	-	1,61		lb 2,22		
QC ISO B SAE20 MALE	31,5	MPa 35	mm - 126	44,5	65					QC ISO B SAE20 MALE	31,5	MPa 35	mm - 126	44,5	65	SAE20	kg -	NC03S06S000	
Psi 5075		inch - 4,96	1,75	2,56						Psi 5075		inch - 4,96	1,75	2,56		lb -			
QC ISO B SAE20 FEMALE		MPa 35	mm 74,8	126	-	65				QC ISO B SAE20 FEMALE		MPa 35	mm 74,8	126	-	65	SAE20	kg -	NC04S06S000
Psi 5075		inch 2,94	4,96	-	2,56					Psi 5075		inch 2,94	4,96	-	2,56		lb -		
QC ISO B SAE24 MALE	40	MPa 35	mm - 126	44,5	65					QC ISO B SAE24 MALE	40	MPa 35	mm - 126	44,5	65	SAE24	kg -	NC03S07S000	
Psi 5075		inch - 4,96	1,75	2,56						Psi 5075		inch - 4,96	1,75	2,56		lb -			
QC ISO B SAE24 FEMALE		MPa 35	mm 74,8	126	-	65				QC ISO B SAE24 FEMALE		MPa 35	mm 74,8	126	-	65	SAE24	kg -	NC04S07S000
Psi 5075		inch 2,94	4,96	-	2,56					Psi 5075		inch 2,94	4,96	-	2,56		lb -		
QC ISO B SAE32 MALE	50	MPa 35	mm - 142	63,2	90					QC ISO B SAE32 MALE	50	MPa 35	mm - 142	63,2	90	SAE32	kg -	NC03S08S000	
Psi 5075		inch - 5,59	2,49	3,54						Psi 5075		inch - 5,59	2,49	3,54		lb -			
QC ISO B SAE32 FEMALE		MPa 35	mm 105	142	-	90				QC ISO B SAE32 FEMALE		MPa 35	mm 105	142	-	90	SAE32	kg -	NC04S08S000
Psi 5075		inch 4,13	5,59	-	3,54					Psi 5075		inch 4,13	5,59	-	3,54		lb -		
QC ISO B G 2 MALE	50	MPa 9	mm - 142	63,2	90					QC ISO B G 2 MALE	50	MPa 9	mm - 142	63,2	90	G 2	kg -	NC03G08S000	
Psi 1305		inch - 5,59	2,49	3,54						Psi 1305		inch - 5,59	2,49	3,54		lb -			
QC ISO B G 2 FEMALE		MPa 9	mm 105	142	-	90				QC ISO B G 2 FEMALE		MPa 9	mm 105	142	-	90	G 2	kg -	NC04G08S000
Psi 1305		inch 4,13	5,59	-	3,54					Psi 1305		inch 4,13	5,59	-	3,54		lb -		







IN

## QUICK COUPLINGS

Edition. 21.0

## CS Carbon Steel


- Type: Quick Couplings
- Models: ISO 5675
- Sizes: from DN6 to DN25
- Pressure: up to PN350

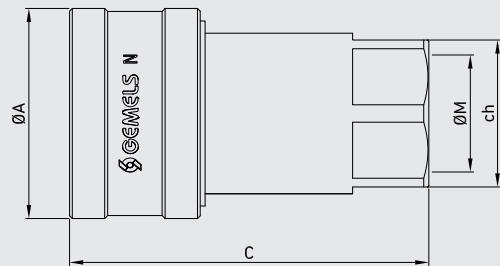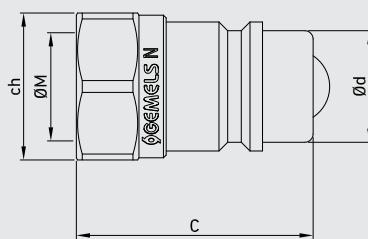**Performance**

(1/4", 3/8", 1/2", 3/4", 1")

Series (1/4", 3/8", 1/2", 3/4", 1")

200SUS (Test Fluid: Oil-200SUS)

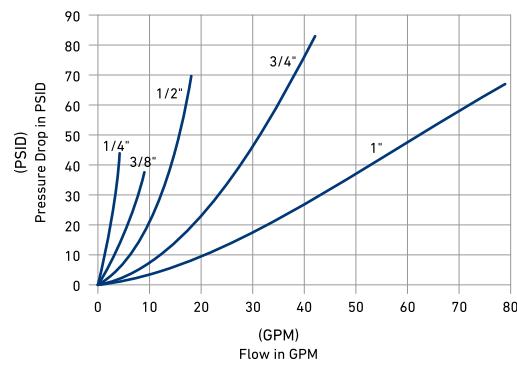

1 GPM = 3.78 l/min

1 PSID = 0.0069 MPa



## CODE DESCRIPTION STRUCTURE



Type of coupling \_\_\_\_\_

ISO 5675 N

Ends \_\_\_\_\_

BSP	NPT
G 1/4	N 1/4
G 3/8	N 3/8
G 1/2	N 1/2
G 3/4	N 3/4
G 1	N 1

MALE \_\_\_\_\_

FEMALE

DN/ISO \_\_\_\_\_

6,3  
10  
12,5  
20  
25

Body Material \_\_\_\_\_



● 1 = 1,0737

Seal material \_\_\_\_\_

B = NBR E = FKM\*

\*On request

- Cups
- Plugs



## ■ QUICK COUPLINGS ISO 5675 BSP with ball valve (QC male / female)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE	CS Carbon Steel
QC N G 1/4 MALE	6,3	MPa 35	mm - 36	14,2	19	G 1/4	kg 0,04	NC07G010000		
		Psi 5075	inch - 1,42	0,56	0,75		lb 0,09			
QC N G 1/4 FEMALE		MPa 35	mm 27,6	53,5	-	19	kg 0,11	NC08G010000		
		Psi 5075	inch 1,09	2,11	-	0,75	lb 0,24			
QC N G 3/8 MALE	10	MPa 28	mm - 40	19	24	G 3/8	kg 0,08	NC07G020000		
		Psi 4060	inch - 1,57	0,75	0,94		lb 0,18			
QC N G 3/8 FEMALE		MPa 28	mm 34	63	-	24	kg 0,2	NC08G020000		
		Psi 4060	inch 1,34	2,48	-	0,94	lb 0,44			
QC N G 1/2 MALE	12,5	MPa 28	mm - 43,5	20,5	27	G 1/2	kg 0,09	NC07G030000		
		Psi 4060	inch - 1,71	0,81	1,06		lb 0,20			
QC N G 1/2 FEMALE		MPa 28	mm 38,6	66,3	-	27	kg 0,27	NC08G030000		
		Psi 4060	inch 1,52	2,61	-	1,06	lb 0,60			
QC N G 3/4 MALE	20	MPa 20	mm - 53,5	28	34	G 3/4	kg 0,182	NC07G040000		
		Psi 2900	inch - 2,11	1,10	1,34		lb 0,40			
QC N G 3/4 FEMALE		MPa 20	mm 48,2	82,5	-	34	kg 0,515	NC08G040000		
		Psi 2900	inch 1,90	3,25	-	1,34	lb 1,14			
QC N G 1 MALE	25	MPa 20	mm - 63	31,3	41	G 1	kg 0,246	NC07G050000		
		Psi 2900	inch - 2,48	1,23	1,61		lb 0,54			
QC N G 1 FEMALE		MPa 20	mm 56	96,5	-	41	kg 0,817	NC08G050000		
		Psi 2900	inch 2,20	3,80	-	1,61	lb 1,80			

## ■ QUICK COUPLINGS ISO 5675 NPT with ball valve (QC male / female)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE	CS Carbon Steel
QC N N 1/4 MALE	6,3	MPa 35	mm - 36	14,2	19	NPT	kg 0,04	NC07N010000		
		Psi 5075	inch - 1,42	0,56	0,75	1/4	lb 0,09			
QC N N 1/4 FEMALE		MPa 35	mm 27,6	53,5	-	19	NPT	kg 0,11	NC08N010000	
		Psi 5075	inch 1,09	2,11	-	0,75	1/4	lb 0,24		
QC N N 3/8 MALE	10	MPa 28	mm - 40	19	24	NPT	kg 0,08	NC07N020000		
		Psi 4060	inch - 1,57	0,75	0,94	3/8	lb 0,18			
QC N N 3/8 FEMALE		MPa 28	mm 34	63	-	24	NPT	kg 0,2	NC08N020000	
		Psi 4060	inch 1,34	2,48	-	0,94	3/8	lb 0,44		
QC N N 1/2 MALE	12,5	MPa 28	mm - 43,5	20,5	27	NPT	kg 0,09	NC07N030000		
		Psi 4060	inch - 1,71	0,81	1,06	1/2	lb 0,20			
QC N N 1/2 FEMALE		MPa 28	mm 38,6	66,3	-	27	NPT	kg 0,27	NC08N030000	
		Psi 4060	inch 1,52	2,61	-	1,06	1/2	lb 0,60		
QC N N 3/4 MALE	20	MPa 20	mm - 53,5	28	34	NPT	kg 0,09	NC07N040000		
		Psi 2900	inch - 2,11	1,10	1,34	3/4	lb 0,20			
QC N N 3/4 FEMALE		MPa 20	mm 48,2	82,5	-	34	NPT	kg 0,27	NC08N040000	
		Psi 2900	inch 1,90	3,25	-	1,34	3/4	lb 0,60		
QC N N 1 MALE	25	MPa 20	mm - 63	31,3	41	NPT 1	kg 0,09	NC07N050000		
		Psi 2900	inch - 2,48	1,23	1,61		lb 0,20			
QC N N 1 FEMALE		MPa 20	mm 56	96,5	-	41	NPT 1	kg 0,27	NC08N050000	
		Psi 2900	inch 2,20	3,80	-	1,61	lb 0,60			






**NV**
**QUICK COUPLINGS**

Edition. 21.0

**CS Carbon Steel**


- Type: Quick Couplings
- Models: ISO 5675
- Sizes: from DN6 to DN25
- Pressure: up to PN350

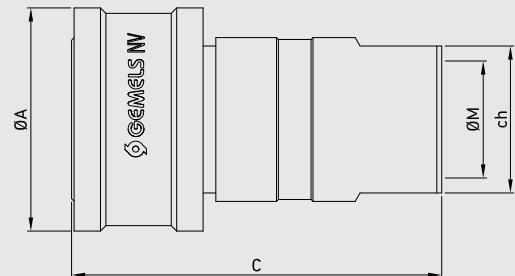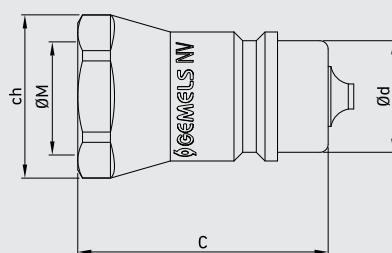
**Performance**

(1/4", 3/8", 1/2", 3/4", 1")

Series (1/4", 3/8", 1/2", 3/4", 1")

200SUS (Test Fluid: Oil-200SUS)

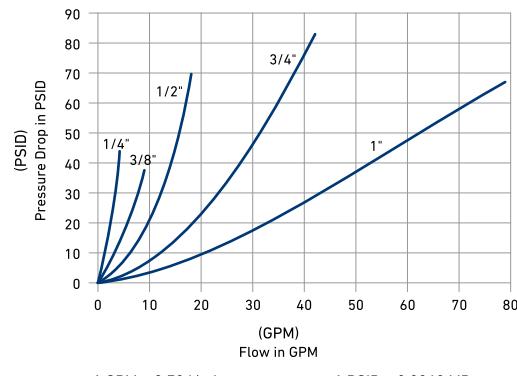

1 GPM = 3.78 l/min

1 PSID = 0.0069 MPa



## CODE DESCRIPTION STRUCTURE



Type of coupling \_\_\_\_\_

ISO 5675 NV

Ends \_\_\_\_\_

BSP	NPT
G 1/4	N 1/4
G 3/8	N 3/8
G 1/2	N 1/2
G 3/4	N 3/4
G 1	N 1

MALE \_\_\_\_\_

FEMALE

DN/ISO \_\_\_\_\_

6,3  
10  
12,5  
20  
25

Body Material \_\_\_\_\_



● 1 = 1,0737

Seal material \_\_\_\_\_

B = NBR E = FKM\*

\*On request

- Cups
- Plugs



## ■ QUICK COUPLINGS ISO 5675 BSP with ball valve (QC male / female)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE
QC NV G 1/4 MALE	6,3	MPa 35	mm - 36	14,2	19		G 1/4	kg 0,043	NC09G010000
		Psi 5075	inch - 1,42	0,56	0,75			lb 0,09	
QC NV G 1/4 FEMALE		MPa 35	mm 27,6	55,5	-	22	G 1/4	kg 0,128	NC10G010000
		Psi 5075	inch 1,09	2,19	-	0,87		lb 0,28	
QC NV G 3/8 MALE	10	MPa 28	mm - 40	19	24		G 3/8	kg 0,075	NC09G020000
		Psi 4060	inch - 1,57	0,75	0,94			lb 0,17	
QC NV G 3/8 FEMALE		MPa 28	mm 34	60,5	-	24	G 3/8	kg 0,2	NC10G020000
		Psi 4060	inch 1,34	2,38	-	0,94		lb 0,44	
QC NV G 1/2 MALE	12,5	MPa 28	mm - 46	20,5	27		G 1/2	kg 0,085	NC09G030000
		Psi 4060	inch - 1,81	0,81	1,06			lb 0,19	
QC NV G 1/2 FEMALE		MPa 28	mm 38	68	-	27	G 1/2	kg 0,27	NC10G030000
		Psi 4060	inch 1,50	2,68	-	1,06		lb 0,60	
QC NV G 3/4 MALE	20	MPa 20	mm - 53,5	28	34		G 3/4	kg 0,174	NC09G040000
		Psi 2900	inch - 2,11	1,10	1,34			lb 0,38	
QC NV G 3/4 FEMALE		MPa 20	mm 48,2	82,5	-	34	G 3/4	kg 0,515	NC10G040000
		Psi 2900	inch 1,90	3,25	-	1,34		lb 1,14	
QC NV G 1 MALE	25	MPa 20	mm - 64	31,3	41		G 1	kg 0,258	NC09G050000
		Psi 2900	inch - 2,52	1,23	1,61			lb 0,57	
QC NV G 1 FEMALE		MPa 20	mm 56,2	97,5	-	41	G 1	kg 0,936	NC10G050000
		Psi 2900	inch 2,21	3,84	-	1,61		lb 2,06	

## ■ QUICK COUPLINGS ISO 5675 NPT with ball valve (QC male / female)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE
QC NV N 1/4 MALE	6,3	MPa 35	mm - 36	14,2	19		NPT	kg 0,044	NC09N010000
		Psi 5075	inch - 1,42	0,56	0,75		1/4	lb 0,10	
QC NV N 1/4 FEMALE		MPa 35	mm 27,6	55,5	-	22	NPT	kg 0,13	NC10N010000
		Psi 5075	inch 1,09	2,19	-	0,87	1/4	lb 0,29	
QC NV N 3/8 MALE	10	MPa 28	mm - 40	19	24		NPT	kg 0,08	NC09N020000
		Psi 4060	inch - 1,57	0,75	0,94		3/8	lb 0,18	
QC NV N 3/8 FEMALE		MPa 28	mm 34	60,5	-	24	NPT	kg 0,2	NC10N020000
		Psi 4060	inch 1,34	2,38	-	0,94	3/8	lb 0,44	
QC NV N 1/2 MALE	12,5	MPa 28	mm - 46	20,5	27		NPT	kg 0,09	NC09N030000
		Psi 4060	inch - 1,81	0,81	1,06		1/2	lb 0,20	
QC NV N 1/2 FEMALE		MPa 28	mm 38	68	-	27	NPT	kg 0,27	NC10N030000
		Psi 4060	inch 1,50	2,68	-	1,06	1/2	lb 0,60	
QC NV N 3/4 MALE	20	MPa 20	mm - 53,5	28	34		NPT	kg 0,09	NC09N040000
		Psi 2900	inch - 2,11	1,10	1,34		3/4	lb 0,20	
QC NV N 3/4 FEMALE		MPa 20	mm 48,2	82,5	-	34	NPT	kg 0,29	NC10N040000
		Psi 2900	inch 1,90	3,25	-	1,34	3/4	lb 0,64	
QC NV N 1 MALE	25	MPa 20	mm - 64	31,3	41		NPT 1	kg 0,1	NC09N050000
		Psi 2900	inch - 2,52	1,23	1,61			lb 0,22	
QC NV N 1 FEMALE		MPa 20	mm 56,2	97,5	-	41	NPT 1	kg 0,3	NC10N050000
		Psi 2900	inch 2,21	3,84	-	1,61		lb 0,66	





# VGA

## QUICK COUPLINGS

Available other different threads on request


Edition. 21.0

### CS Carbon Steel

- Type: Quick Couplings
- Models: ISO 14541
- Sizes: from DN6 up to DN25
- Pressure: up to PN350

### SS Stainless Steel

- Type: Quick Couplings
- Models: ISO 14541
- Sizes: from DN6 up to DN25
- Pressure: up to PN350

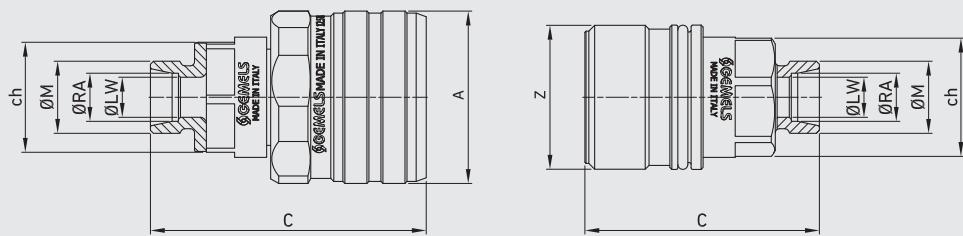



## CODE DESCRIPTION STRUCTURE

QC | 1/2 | F/M | DN12,5 | 1 | B

Type of coupling \_\_\_\_\_  
SCREW-TO-CONNECT-COUPLED ISO 14541

Ends \_\_\_\_\_

BSP	DIN LIGHT SERIES	DIN HEAVY SERIES	BULKHEAD DIN LIGHT SERIES	BULKHEAD DIN HEAVY SERIES		
G1/4	6L	8S	8L	10S		
G3/8	8L	10S	10L	12S		
G1/2	10L	12S	12L	16S		
G3/4	12L	14S	15L	20S		
G1	15L	16S	18L	25S		
	18L	20S	22L	30S		
	22L	25S	28L			
	28L	30S				
	35L					

MALE \_\_\_\_\_  
FEMALE

DN/ISO \_\_\_\_\_

6,3  
10  
12,5  
20  
25

Body Material \_\_\_\_\_


- 1 = 1,0737
- 4 = 1,4404

Seal material \_\_\_\_\_

- B = NBR E = FKM\*
- E = FKM

\*On request


- Cups
- Plugs



## SCREW-TO-CONNECT-COUPLED ISO 14541 BSP (QC male / female)

TYPE	DN	PN	ØA	C	Øz	ch	ØM	WEIGHT	ITEM CODE	CS	SS Stainless Steel						
										Carbon Steel							
QC VGA G 1/4 MALE	6,3	MPa 35	mm 30	64	-	19	G1/4	kg 0,141	NC15G010000	MPa 35	mm 30	64	-	19	G1/4	kg 0,141	NC15G01S000
Psi 5075		inch 1,18	2,52		0,75			lb 0,31		Psi 5075	inch 1,18	2,52		0,75		lb 0,31	
QC VGA G 1/4 FEMALE	6,3	MPa 35	mm -	53	M24X2	19	G1/4	kg 0,122	NC16G010000	MPa 35	mm -	53	M24X2	19	G1/4	kg 0,122	NC16G01S000
Psi 5075		inch -	2,09		0,75			lb 0,27		Psi 5075	inch -	2,09	0,75			lb 0,27	
QC VGA G 3/8 MALE	10	MPa 35	mm 34	66,5	-	24	G3/8	kg 0,193	NC15G020000	MPa 35	mm 34	66,5	-	24	G3/8	kg 0,193	NC15G02S000
Psi 5075		inch 1,34	2,62		0,94			lb 0,43		Psi 5075	inch 1,34	2,62		0,94		lb 0,43	
QC VGA G 3/8 FEMALE	10	MPa 35	mm -	60	M28X2	24	G3/8	kg 0,185	NC16G020000	MPa 35	mm -	60	M28X2	24	G3/8	kg 0,185	NC16G02S000
Psi 5075		inch -	2,36		0,94			lb 0,41		Psi 5075	inch -	2,36	0,94			lb 0,41	
QC VGA G 1/2 MALE	10	MPa 35	mm 34	69	-	24	G1/2	kg 0,187	NC15G020001	MPa 35	mm 34	69	-	24	G1/2	kg 0,187	NC15G02S001
Psi 5075		inch 1,34	2,72		0,94			lb 0,41		Psi 5075	inch 1,34	2,72		0,94		lb 0,41	
QC VGA G 1/2 FEMALE	10	MPa 35	mm -	62,5	M28X2	24	G1/2	kg 0,171	NC16G020001	MPa 35	mm -	62,5	M28X2	24	G1/2	kg 0,171	NC16G02S001
Psi 5075		inch -	2,46		0,94			lb 0,38		Psi 5075	inch -	2,46	0,94			lb 0,38	
QC VGA G 3/8 MALE	12,5	MPa 35	mm 43	71	-	27	G3/8	kg 0,309	NC15G030000	MPa 35	mm 43	71	-	27	G3/8	kg 0,309	NC15G03S000
Psi 5075		inch 1,69	2,80		1,06			lb 0,68		Psi 5075	inch 1,69	2,80		1,06		lb 0,68	
QC VGA G 3/8 FEMALE	12,5	MPa 35	mm -	60,5	M36X2	27	G3/8	kg 0,311	NC16G030000	MPa 35	mm -	60,5	M36X2	27	G3/8	kg 0,311	NC16G03S000
Psi 5075		inch -	2,38		1,06			lb 0,69		Psi 5075	inch -	2,38	1,06			lb 0,69	
QC VGA G 1/2 MALE	12,5	MPa 35	mm 43	74	-	27	G1/2	kg 0,303	NC15G030001	MPa 35	mm 43	74	-	27	G1/2	kg 0,303	NC15G03S001
Psi 5075		inch 1,69	2,91		1,06			lb 0,67		Psi 5075	inch 1,69	2,91		1,06		lb 0,67	
QC VGA G 1/2 FEMALE	12,5	MPa 35	mm -	63,5	M36X2	27	G1/2	kg 0,306	NC16G030001	MPa 35	mm -	63,5	M36X2	27	G1/2	kg 0,306	NC16G03S001
Psi 5075		inch -	2,50		1,06			lb 0,67		Psi 5075	inch -	2,50	1,06			lb 0,67	
QC VGA G 3/4 MALE	20	MPa 35	mm 48	85	-	34	G3/4	kg 0,44	NC15G040000	MPa 35	mm 48	85	-	34	G3/4	kg 0,44	NC15G04S000
Psi 5075		inch 1,89	3,35		1,34			lb 0,97		Psi 5075	inch 1,89	3,35		1,34		lb 0,97	
QC VGA G 3/4 FEMALE	20	MPa 35	mm -	84	M42X2	34	G3/4	kg 0,517	NC16G040000	MPa 35	mm -	84	M42X2	34	G3/4	kg 0,517	NC16G04S000
Psi 5075		inch -	3,31		1,34			lb 1,14		Psi 5075	inch -	3,31	1,34			lb 1,14	
QC VGA G 3/4 MALE	25	MPa 35	mm 57	98,5	-	41	G3/4	kg 0,758	NC15G050000	MPa 35	mm 57	98,5	-	41	G3/4	kg 0,758	NC15G05S000
Psi 5075		inch 2,24	3,88		1,61			lb 1,67		Psi 5075	inch 2,24	3,88		1,61		lb 1,67	
QC VGA G 3/4 FEMALE	25	MPa 35	mm -	95	M48X2	41	G3/4	kg 0,75	NC16G050000	MPa 35	mm -	95	M48X2	41	G3/4	kg 0,75	NC16G05S000
Psi 5075		inch -	3,74		1,61			lb 1,65		Psi 5075	inch -	3,74	1,61			lb 1,65	
QC VGA G 1 MALE	25	MPa 35	mm 57	100,5	-	41	G1	kg 0,737	NC15G050001	MPa 35	mm 57	100,5	-	41	G1	kg 0,737	NC15G05S001
Psi 5075		inch 2,24	3,96		1,61			lb 1,62		Psi 5075	inch 2,24	3,96		1,61		lb 1,62	
QC VGA G 1 FEMALE	25	MPa 35	mm -	97	M48X2	41	G1	kg 0,728	NC16G050001	MPa 35	mm -	97	M48X2	41	G1	kg 0,728	NC16G05S001
Psi 5075		inch -	3,82		1,61			lb 1,60		Psi 5075	inch -	3,82	1,61			lb 1,60	






## SCREW-TO-CONNECT-COUPLED ISO 14541 DIN HEAVY (QC male / female)


**CS**  
Carbon Steel

TYPE	DN	PN	ØA	C	Øz	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC VGA 8S MALE	10	MPa 35	mm 34	69	-	24	M16X1,5	5	8	kg 0,169	NC15H020000
		Psi 5075	inch 1,34	2,72	-	0,94		0,20	0,31	0,31 0,37	
		MPa 35	mm -	62,5	M28X2	24	M16X1,5	5	8	kg 0,172	NC16H020000
		Psi 5075	inch -	2,46	-	0,94	M16X1,5	0,20	0,31	lb 0,38	
		MPa 35	mm 34	69	-	24	M18X1,5	7	10	kg 0,169	NC15H020001
		Psi 5075	inch 1,34	2,72	-	0,94	M18X1,5	0,28	0,39	0,39 0,37	
		MPa 35	mm -	62,5	M28X2	24	M18X1,5	7	10	kg 0,158	NC16H020001
		Psi 5075	inch -	2,46	-	0,94	M18X1,5	0,28	0,39	lb 0,35	
		MPa 35	mm 43	70	-	27	M20X1,5	8	12	kg 0,251	NC15H030000
		Psi 5075	inch 1,69	2,76	-	1,06	M20X1,5	0,31	0,47	0,47 0,55	
QC VGA 12S FEMALE	12,5	MPa 35	mm -	59,5	M36X2	27	M20X1,5	8	12	kg 0,254	NC16H030000
		Psi 5075	inch -	2,34	-	1,06	M20X1,5	0,31	0,47	lb 0,56	
		MPa 35	mm 43	72	-	27	M22X1,5	8	14	kg 0,26	NC15H030001
		Psi 5075	inch 1,69	2,83	-	1,06	M22X1,5	0,31	0,55	0,55 0,57	
		MPa 35	mm -	61,5	M36X2	27	M22X1,5	8	14	kg 0,258	NC16H030001
		Psi 5075	inch -	2,42	-	1,06	M22X1,5	0,31	0,55	lb 0,57	
		MPa 35	mm 43	72	-	27	M24X1,5	12	16	kg 0,281	NC15H030002
		Psi 5075	inch 1,69	2,83	-	1,06	M24X1,5	0,47	0,63	0,63 0,62	
QC VGA 16S FEMALE	20	MPa 35	mm -	61,5	M36X2	27	M24X1,5	12	16	kg 0,278	NC16H030002
		Psi 5075	inch -	2,42	-	1,06	M24X1,5	0,47	0,63	lb 0,61	
		MPa 35	mm 43	79	-	34	M24X1,5	12	16	kg 0,374	NC15H040000
		Psi 5075	inch 1,89	3,11	-	1,34	M24X1,5	0,47	0,63	0,63 0,82	
QC VGA 16S MALE	20	MPa 35	mm -	78	M42X2	34	M24X1,5	12	16	kg 0,266	NC16H040000
		Psi 5075	inch -	3,07	-	1,34	M24X1,5	0,47	0,63	lb 0,59	
		MPa 35	mm 48	81	-	34	M30X2	16	20	kg 0,383	NC15H040001
		Psi 5075	inch 1,89	3,19	-	1,34	M30X2	0,63	0,79	0,79 0,84	
QC VGA 20S FEMALE	25	MPa 35	mm -	80	M42X2	34	M30X2	16	20	kg 0,436	NC16H040001
		Psi 5075	inch -	3,15	-	1,34	M30X2	0,63	0,79	lb 0,96	
		MPa 35	mm 57	100,5	-	41	M30X2	16	20	kg 0,723	NC15H050000
		Psi 5075	inch 2,24	3,96	-	1,61	M30X2	0,63	0,79	0,79 1,59	
QC VGA 20S MALE	25	MPa 35	mm -	97	M48x2	41	M30X2	16	20	kg 0,721	NC16H050000
		Psi 5075	inch -	3,82	-	1,61	M30X2	0,63	0,79	lb 1,59	
		MPa 35	mm 57	102,5	-	41	M36X2	20	25	kg 0,742	NC15H050001
		Psi 5075	inch 2,24	4,04	-	1,61	M36X2	0,79	0,98	0,98 1,64	
QC VGA 25S FEMALE	25	MPa 35	mm -	99	M48x2	41	M36X2	20	25	kg 0,74	NC16H050001
		Psi 5075	inch -	3,90	-	1,61	M36X2	0,79	0,98	lb 1,63	
		MPa 35	mm 57	104,5	-	46	M42X2	25	30	kg 0,821	NC15H050002
		Psi 5075	inch 2,24	4,11	-	1,81	M42X2	0,98	1,18	1,18 1,81	
QC VGA 30S MALE	25	MPa 35	mm -	101	M48x2	46	M42X2	25	30	kg 0,813	NC16H050002
		Psi 5075	inch -	3,98	-	1,81	M42X2	0,98	1,18	lb 1,79	



## SCREW-TO-CONNECT-COUPLENGS ISO 14541 DIN HEAVY (QC male / female)


TYPE	DN	PN	ØA	C	Øz	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE	SS Stainless Steel	
"QC VGA 8S MALE"	10	MPa 35	mm 34	69	-	24	M16X1,5	5	8	kg 0,169	NC15H02S000	Stainless Steel	
"QC VGA 8S FEMALE"		Psi 5075	inch 1,34	2,72	-	0,94		0,20	0,31	0,31 0,37			
"QC VGA 10S MALE "		MPa 35	mm -	62,5	M28X2	24	M16X1,5	5	8	kg 0,172	NC16H02S000		
"QC VGA 10S FEMALE "		Psi 5075	inch -	2,46	-	0,94		0,20	0,31	lb 0,38			
"QC VGA 12S MALE"		MPa 35	mm 34	69	-	24	M18X1,5	7	10	kg 0,169	NC15H02S001		
"QC VGA 12S FEMALE"		Psi 5075	inch 1,34	2,72	-	0,94		0,28	0,39	0,39 0,37			
"QC VGA 14S MALE"		MPa 35	mm -	62,5	M28X2	24	M18X1,5	7	10	kg 0,158	NC16H02S001		
"QC VGA 14S FEMALE"		Psi 5075	inch -	2,46	-	0,94		0,28	0,39	lb 0,35			
"QC VGA 12S MALE"	12,5	MPa 35	mm 43	70	-	27	M20X1,5	8	12	kg 0,251	NC15H03S000	Stainless Steel	
"QC VGA 12S FEMALE"		Psi 5075	inch 1,69	2,76	-	1,06		0,31	0,47	0,47 0,55			
"QC VGA 14S MALE"		MPa 35	mm -	59,5	M36X2	27	M20X1,5	8	12	kg 0,254	NC16H03S000		
"QC VGA 14S FEMALE"		Psi 5075	inch -	2,34	-	1,06		0,31	0,47	lb 0,56			
"QC VGA 14S MALE"		MPa 35	mm 43	72	-	27	M22X1,5	8	14	kg 0,26	NC15H03S001		
"QC VGA 14S FEMALE"		Psi 5075	inch 1,69	2,83	-	1,06		0,31	0,55	0,55 0,57			
"QC VGA 16S MALE"		MPa 35	mm -	61,5	M36X2	27	M22X1,5	8	14	kg 0,258	NC16H03S001		
"QC VGA 16S FEMALE"		Psi 5075	inch -	2,42	-	1,06		0,31	0,55	lb 0,57			
"QC VGA 16S MALE"	20	MPa 35	mm 43	72	-	27	M24X1,5	12	16	kg 0,281	NC15H03S002	Stainless Steel	
"QC VGA 16S FEMALE"		Psi 5075	inch 1,69	2,83	-	1,06		0,47	0,63	0,63 0,62			
"QC VGA 20S MALE"		MPa 35	mm -	61,5	M36X2	27	M24X1,5	12	16	kg 0,278	NC16H03S002		
"QC VGA 20S FEMALE"		Psi 5075	inch -	2,42	-	1,06		0,47	0,63	lb 0,61			
"QC VGA 16S MALE"		MPa 35	mm 48	79	-	34	M24X1,5	12	16	kg 0,374	NC15H04S000		
"QC VGA 16S FEMALE"		Psi 5075	inch 1,89	3,11	-	1,34		0,47	0,63	0,63 0,82			
"QC VGA 20S MALE"		MPa 35	mm -	78	M42X2	34	M24X1,5	12	16	kg 0,266	NC16H04S000		
"QC VGA 20S FEMALE"		Psi 5075	inch -	3,07	-	1,34		0,47	0,63	lb 0,59			
"QC VGA 20S MALE"	25	MPa 35	mm 48	81	-	34	M30X2	16	20	kg 0,383	NC15H04S001	Stainless Steel	
"QC VGA 20S FEMALE"		Psi 5075	inch 1,89	3,19	-	1,34		0,63	0,79	0,79 0,84			
"QC VGA 20S MALE"		MPa 35	mm -	80	M42X2	34	M30X2	16	20	kg 0,436	NC16H04S001		
"QC VGA 20S FEMALE"		Psi 5075	inch -	3,15	-	1,34		0,63	0,79	lb 0,96			
"QC VGA 20S MALE"		MPa 35	mm 57	100,5	-	41	M30X2	16	20	kg 0,723	NC15H05S000		
"QC VGA 20S FEMALE"		Psi 5075	inch 2,24	3,96	-	1,61		0,63	0,79	0,79 1,59			
"QC VGA 20S MALE"		MPa 35	mm -	97	M48x2	41	M30X2	16	20	kg 0,721	NC16H05S000		
"QC VGA 20S FEMALE"		Psi 5075	inch -	3,82	-	1,61		0,63	0,79	lb 1,59			
"QC VGA 25S MALE"	25	MPa 35	mm 57	102,5	-	41	M36X2	20	25	kg 0,742	NC15H05S001	Stainless Steel	
"QC VGA 25S FEMALE"		Psi 5075	inch 2,24	4,04	-	1,61		0,79	0,98	0,98 1,64			
"QC VGA 25S MALE"		MPa 35	mm -	99	M48x2	41	M36X2	20	25	kg 0,742	NC16H05S001		
"QC VGA 25S FEMALE"		Psi 5075	inch -	3,90	-	1,61		0,79	0,98	lb 1,63			
"QC VGA 30S MALE"		MPa 35	mm 57	104,5	-	46	M42X2	25	30	kg 0,821	NC15H05S002		
"QC VGA 30S FEMALE"		Psi 5075	inch 2,24	4,11	-	1,81		0,98	1,18	1,18 1,81			
"QC VGA 30S MALE"		MPa 35	mm -	101	M48x2	46	M42X2	25	30	kg 0,813	NC16H05S002		
"QC VGA 30S FEMALE"		Psi 5075	inch -	3,98	-	1,81		0,98	1,18	lb 1,79			



## SCREW-TO-CONNECT-COUPLED ISO 14541 DIN LIGHT (QC male / female)


**CS**  
Carbon Steel

TYPE	DN	PN	ØA	C	Øz	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC VGA 8L MALE	6,3	MPa 35	mm 30	61	-	19	M14X1,5	6	8	kg 0,114	NC15L010000
Psi 5075		inch 1,18	2,40		0,75			0,24	0,31	0,31 0,25	
QC VGA 8L FEMALE	6,3	MPa 35	mm -	50,5	M24X2	19	M14X1,5	6	8	kg 0,1	NC16L010000
Psi 5075		inch -	1,99		0,75			0,24	0,31	lb 0,22	
QC VGA 6L MALE	10	MPa 35	mm 34	67	-	24	M12X1,5	4	6	kg 0,19	NC15L020000
Psi 5075		inch 1,34	2,64		0,94			0,16	0,24	0,24 0,42	
QC VGA 6L FEMALE	10	MPa 35	mm -	60,5	M28X2	24	M12X1,5	4	6	kg 0,166	NC16L020000
Psi 5075		inch -	2,38		0,94			0,16	0,24	lb 0,37	
QC VGA 8L MALE	10	MPa 35	mm 34	67	-	24	M14X1,5	6	8	kg 0,165	NC15L020001
Psi 5075		inch 1,34	2,64		0,94			0,24	0,31	0,31 0,36	
QC VGA 8L FEMALE	10	MPa 35	mm -	60,5	M28X2	24	M14X1,5	6	8	kg 0,167	NC16L020001
Psi 5075		inch -	2,38		0,94			0,24	0,31	lb 0,37	
QC VGA 10L MALE	10	MPa 35	mm 34	68	-	24	M16X1,5	8	10	kg 0,166	NC15L020002
Psi 5075		inch 1,34	2,68		0,94			0,31	0,39	0,39 0,37	
QC VGA 10L FEMALE	10	MPa 35	mm -	61,5	M28X2	24	M16X1,5	8	10	kg 0,173	NC16L020002
Psi 5075		inch -	2,42		0,94			0,31	0,39	lb 0,38	
QC VGA 10L MALE	12,5	MPa 35	mm 43	69	-	27	M16X1,5	8	10	kg 0,247	NC15L030000
Psi 5075		inch 1,69	2,72		1,06			0,31	0,39	0,39 0,54	
QC VGA 10L FEMALE	12,5	MPa 35	mm -	58,5	M36X2	27	M16X1,5	8	10	kg 0,27	NC16L030000
Psi 5075		inch -	2,30		1,06			0,31	0,39	lb 0,60	
QC VGA 12L MALE	12,5	MPa 35	mm 43	69	-	27	M18X1,5	10	12	kg 0,247	NC15L030001
Psi 5075		inch 1,69	2,72		1,06			0,39	0,47	0,47 0,54	
QC VGA 12L FEMALE	12,5	MPa 35	mm -	58,5	M36X2	27	M18X1,5	10	12	kg 0,25	NC16L030001
Psi 5075		inch -	2,30		1,06			0,39	0,47	lb 0,55	
QC VGA 15L MALE	12,5	MPa 35	mm 43	70	-	27	M22X1,5	12	15	kg 0,253	NC15L030002
Psi 5075		inch 1,69	2,76		1,06			0,47	0,59	0,59 0,56	
QC VGA 15L FEMALE	12,5	MPa 35	mm -	59,5	M36X2	27	M22X1,5	12	15	kg 0,251	NC16L030002
Psi 5075		inch -	2,34		1,06			0,47	0,59	lb 0,55	
QC VGA 18L MALE	12,5	MPa 35	mm 43	70	-	27	M26X1,5	15	18	kg 0,258	NC15L030003
Psi 5075		inch 1,69	2,76		1,06			0,59	0,71	0,71 0,57	
QC VGA 18L FEMALE	12,5	MPa 35	mm -	59,5	M36X2	27	M26X1,5	15	18	kg 0,261	NC16L030003
Psi 5075		inch -	2,34		1,06			0,59	0,71	lb 0,58	



## SCREW-TO-CONNECT-COUPLED ISO 14541 DIN LIGHT (QC male / female)


TYPE	DN	PN	ØA	C	Øz	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
											CS Carbon Steel
QC VGA 18L MALE	20	MPa 35	mm 48	77	-	34	M26X1,5	15	18	kg 0,372	NC15L040000
		Psi 5075	inch 1,89	3,03	-	1,34		0,59	0,71	0,71 0,82	
		MPa 35	mm -	76	M42X2	34	M26X1,5	15	18	kg 0,424	NC16L040000
		Psi 5075	inch -	2,99	-	1,34		0,59	0,71	lb 0,93	
QC VGA 22L MALE	20	MPa 35	mm 48	79	-	34	M30X2	19	22	kg 0,375	NC15L040001
		Psi 5075	inch 1,89	3,11	-	1,34		0,75	0,87	0,87 0,83	
		MPa 35	mm -	78	M42X2	34	M30X2	19	22	kg 0,854	NC16L040001
		Psi 5075	inch -	3,07	-	1,34		0,75	0,87	lb 1,88	
QC VGA 22L MALE	25	MPa 35	mm 57	98,5	-	41	M30X2	19	22	kg 0,708	NC15L050000
		Psi 5075	inch 2,24	3,88	-	1,61		0,75	0,87	0,87 1,56	
		MPa 35	mm -	95	M48X2	41	M30X2	19	22	kg 0,701	NC16L050000
		Psi 5075	inch -	3,74	-	1,61		0,75	0,87	lb 1,55	
QC VGA 28L MALE	25	MPa 35	mm 57	98,5	-	41	M36X2	24	28	kg 0,707	NC15L050001
		Psi 5075	inch 2,24	3,88	-	1,61		0,94	1,10	1,10 1,56	
		MPa 35	mm -	95	M48X2	41	M36X2	24	28	kg 0,7	NC16L050001
		Psi 5075	inch -	3,74	-	1,61		0,94	1,10	lb 1,54	
QC VGA 35L MALE	25	MPa 35	mm 57	100	-	46	M45X2	30	35	kg 0,784	NC15L050002
		Psi 5075	inch 2,24	3,94	-	1,81		1,18	1,38	1,38 1,73	
		MPa 35	mm -	97	M48X2	46	M45X2	30	35	kg 0,777	NC16L050002
		Psi 5075	inch -	3,82	-	1,81		1,18	1,38	lb 1,71	



## SCREW-TO-CONNECT-COUPLED ISO 14541 DIN LIGHT (QC male / female)


**SS**  
Stainless Steel

TYPE	DN	PN	ØA	C	Øz	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC VGA 8L MALE	6,3	MPa 35	mm 30	61	-	19	M14X1,5	6	8	kg 0,114	NC15L01S000
Psi 5075		inch 1,18	2,40		0,75			0,24	0,31	0,31 0,25	
QC VGA 8L FEMALE	6,3	MPa 35	mm -	50,5	M24X2	19	M14X1,5	6	8	kg 0,1	NC16L01S000
Psi 5075		inch -	1,99		0,75			0,24	0,31	lb 0,22	
QC VGA 6L MALE	10	MPa 35	mm 34	67	-	24	M12X1,5	4	6	kg 0,19	NC15L02S000
Psi 5075		inch 1,34	2,64		0,94			0,16	0,24	0,24 0,42	
QC VGA 6L FEMALE	10	MPa 35	mm -	60,5	M28X2	24	M12X1,5	4	6	kg 0,166	NC16L02S000
Psi 5075		inch -	2,38		0,94			0,16	0,24	lb 0,37	
QC VGA 8L MALE	10	MPa 35	mm 34	67	-	24	M14X1,5	6	8	kg 0,165	NC15L02S001
Psi 5075		inch 1,34	2,64		0,94			0,24	0,31	0,31 0,36	
QC VGA 8L FEMALE	10	MPa 35	mm -	60,5	M28X2	24	M14X1,5	6	8	kg 0,167	NC16L02S001
Psi 5075		inch -	2,38		0,94			0,24	0,31	lb 0,37	
QC VGA 10L MALE	10	MPa 35	mm 34	68	-	24	M16X1,5	8	10	kg 0,166	NC15L02S002
Psi 5075		inch 1,34	2,68		0,94			0,31	0,39	0,39 0,37	
QC VGA 10L FEMALE	10	MPa 35	mm -	61,5	M28X2	24	M16X1,5	8	10	kg 0,173	NC16L02S002
Psi 5075		inch -	2,42		0,94			0,31	0,39	lb 0,38	
QC VGA 10L MALE	12,5	MPa 35	mm 43	69	-	27	M16X1,5	8	10	kg 0,247	NC15L03S000
Psi 5075		inch 1,69	2,72		1,06			0,31	0,39	0,39 0,54	
QC VGA 10L FEMALE	12,5	MPa 35	mm -	58,5	M36X2	27	M16X1,5	8	10	kg 0,27	NC16L03S000
Psi 5075		inch -	2,30		1,06			0,31	0,39	lb 0,60	
QC VGA 12L MALE	12,5	MPa 35	mm 43	69	-	27	M18X1,5	10	12	kg 0,247	NC15L03S001
Psi 5075		inch 1,69	2,72		1,06			0,39	0,47	0,47 0,54	
QC VGA 12L FEMALE	12,5	MPa 35	mm -	58,5	M36X2	27	M18X1,5	10	12	kg 0,25	NC16L03S001
Psi 5075		inch -	2,30		1,06			0,39	0,47	lb 0,55	
QC VGA 15L MALE	12,5	MPa 35	mm 43	70	-	27	M22X1,5	12	15	kg 0,253	NC15L03S002
Psi 5075		inch 1,69	2,76		1,06			0,47	0,59	0,59 0,56	
QC VGA 15L FEMALE	12,5	MPa 35	mm -	59,5	M36X2	27	M22X1,5	12	15	kg 0,251	NC16L03S002
Psi 5075		inch -	2,34		1,06			0,47	0,59	lb 0,55	
QC VGA 18L MALE	12,5	MPa 35	mm 43	70	-	27	M26X1,5	15	18	kg 0,258	NC15L03S003
Psi 5075		inch 1,69	2,76		1,06			0,59	0,71	0,71 0,57	
QC VGA 18L FEMALE	12,5	MPa 35	mm -	59,5	M36X2	27	M26X1,5	15	18	kg 0,261	NC16L03S003
Psi 5075		inch -	2,34		1,06			0,59	0,71	lb 0,58	




## SCREW-TO-CONNECT-COUPLED ISO 14541 DIN LIGHT (QC male / female)

TYPE	DN	PN	ØA	C	Øz	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
											SS Stainless Steel
QC VGA 18L MALE	20	MPa 35	mm 48	77	-	34	M26X1,5	15	18	kg 0,372	NC15L04S000
		Psi 5075	inch 1,89	3,03	-	1,34		0,59	0,71	0,71 0,82	
		MPa 35	mm -	76	M42X2	34	M26X1,5	15	18	kg 0,424	NC16L04S000
		Psi 5075	inch -	2,99	-	1,34		0,59	0,71	lb 0,93	
		MPa 35	mm 48	79	-	34	M30X2	19	22	kg 0,375	NC15L04S001
		Psi 5075	inch 1,89	3,11	-	1,34		0,75	0,87	0,87 0,83	
		MPa 35	mm -	78	M42X2	34	M30X2	19	22	kg 0,854	NC16L04S001
		Psi 5075	inch -	3,07	-	1,34		0,75	0,87	lb 1,88	
QC VGA 22L MALE	25	MPa 35	mm 57	98,5	-	41	M30X2	19	22	kg 0,708	NC15L05S000
		Psi 5075	inch 2,24	3,88	-	1,61		0,75	0,87	0,87 1,56	
		MPa 35	mm -	95	M48X2	41	M30X2	19	22	kg 0,701	NC16L05S000
		Psi 5075	inch -	3,74	-	1,61		0,75	0,87	lb 1,55	
		MPa 35	mm 57	98,5	-	41	M36X2	24	28	kg 0,707	NC15L05S001
		Psi 5075	inch 2,24	3,88	-	1,61		0,94	1,10	1,10 1,56	
		MPa 35	mm -	95	M48X2	41	M36X2	24	28	kg 0,7	NC16L05S001
		Psi 5075	inch -	3,74	-	1,61		0,94	1,10	lb 1,54	
QC VGA 35L MALE		MPa 35	mm 57	100	-	46	M45X2	30	35	kg 0,784	NC15L05S002
		Psi 5075	inch 2,24	3,94	-	1,81		1,18	1,38	1,38 1,73	
		MPa 35	mm -	97	M48X2	46	M45X2	30	35	kg 0,777	NC16L05S002
		Psi 5075	inch -	3,82	-	1,81		1,18	1,38	lb 1,71	



## SCREW-TO-CONNECT-COUPLED ISO 14541 DIN HEAVY BULKHEAD (QC male / female)


TYPE	DN	PN	ØA	C	Øz	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
											CS Carbon Steel
QC VGA 10S BK MALE	12,5	MPa 35	mm 43	85	-	27	M18X1,5	7	10	kg 0,453	NC15I030000
		Psi 5075	inch 1,69	3,35	-	1,06		0,28	0,39	lb 1,00	
		MPa 35	mm -	74,5	-	27	M18X1,5	7	10	kg 0,271	NC16I030000
		Psi 5075	inch -	2,93	M36X2	1,06		0,28	0,39	lb 0,60	
		MPa 35	mm 43	85	-	27	M20X1,5	8	12	kg 0,457	NC15I030001
		Psi 5075	inch 1,69	3,35	-	1,06	M20X1,5	0,31	0,47	lb 1,01	
		MPa 35	mm -	74,5	-	27	M20X1,5	8	12	kg 0,275	NC16I030001
		Psi 5075	inch -	2,93	M36X2	1,06		0,31	0,47	lb 0,61	
QC VGA 12S BK MALE	20	MPa 35	mm 43	87	-	27	M24X1,5	12	16	kg 0,471	NC15I030002
		Psi 5075	inch 1,69	3,43	-	1,06	M24X1,5	0,47	0,63	lb 1,04	
		MPa 35	mm -	76,5	-	27	M24X1,5	12	16	kg 0,283	NC16I030002
		Psi 5075	inch -	3,01	M36X2	1,06	M24X1,5	0,47	0,63	lb 0,62	
		MPa 35	mm 48	94	-	34	M24X1,5	12	16	kg 0,674	NC15I040000
		Psi 5075	inch 1,89	3,70	-	1,34		0,47	0,63	lb 1,49	
		MPa 35	mm -	93	-	34	M24X1,5	12	16	kg 0,447	NC16I040000
		Psi 5075	inch -	3,66	M42X2	1,34		0,47	0,63	lb 0,99	
QC VGA 20S BK MALE	25	MPa 35	mm 48	103	-	34	M30X2	16	20	kg 0,716	NC15I040001
		Psi 5075	inch 1,89	4,06	-	1,34	M30X2	0,63	0,79	lb 1,58	
		MPa 35	mm -	102	-	34	M30X2	16	20	kg 0,484	NC16I040001
		Psi 5075	inch -	4,02	M42X2	1,34	M30X2	0,63	0,79	lb 1,07	
		MPa 35	mm 57	122,5	-	41	M30X2	16	20	kg 1,217	NC15I050000
		Psi 5075	inch 2,24	4,82	-	1,61		0,63	0,79	lb 2,68	
		MPa 35	mm -	119	-	41	M30X2	16	20	kg 0,749	NC16I050000
		Psi 5075	inch -	4,69	M48X2	1,61		0,63	0,79	lb 1,65	
QC VGA 25S BK MALE	30	MPa 35	mm 57	122,5	-	41	M36X2	20	25	kg 1,398	NC15I050001
		Psi 5075	inch 2,24	4,82	-	1,61	M36X2	0,79	0,98	lb 3,08	
		MPa 35	mm -	119	-	41	M36X2	20	25	kg 0,84	NC16I050001
		Psi 5075	inch -	4,69	M48X2	1,61		0,79	0,98	lb 1,85	
		MPa 35	mm 57	124,5	-	46	M42X2	25	30	kg 1,566	NC15I050002
		Psi 5075	inch 2,24	4,90	-	1,81	M42X2	0,98	1,18	lb 3,45	
		MPa 35	mm --	121	-	46	M42X2	25	30	kg 0,948	NC16I050002
		Psi 5075	inch -	4,76	M48X2	1,81		0,98	1,18	lb 2,09	




## SCREW-TO-CONNECT-COUPLED ISO 14541 DIN HEAVY BULKHEAD (QC male / female)

TYPE	DN	PN	ØA	C	Øz	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC VGA 10S BK MALE	12,5	MPa 35	mm 43	85	-	27	M18X1,5	7	10	kg 0,453	NC15I03S000
		Psi 5075	inch 1,69	3,35		1,06		0,28	0,39	lb 1,00	
		MPa 35	mm -	74,5		27	M18X1,5	7	10	kg 0,271	NC16I03S000
		Psi 5075	inch -	2,93		1,06		0,28	0,39	lb 0,60	
		MPa 35	mm 43	85	-	27	M20X1,5	8	12	kg 0,457	NC15I03S001
		Psi 5075	inch 1,69	3,35		1,06		0,31	0,47	lb 1,01	
		MPa 35	mm -	74,5		27	M20X1,5	8	12	kg 0,275	NC16I03S001
		Psi 5075	inch -	2,93		1,06		0,31	0,47	lb 0,61	
QC VGA 12S BK MALE	20	MPa 35	mm 43	87	-	27	M24X1,5	12	16	kg 0,471	NC15I03S002
		Psi 5075	inch 1,69	3,43		1,06		0,47	0,63	lb 1,04	
		MPa 35	mm -	76,5		27	M24X1,5	12	16	kg 0,283	NC16I03S002
		Psi 5075	inch -	3,01		1,06		0,47	0,63	lb 0,62	
		MPa 35	mm 48	94	-	34	M24X1,5	12	16	kg 0,674	NC15I04S000
		Psi 5075	inch 1,89	3,70		1,34		0,47	0,63	lb 1,49	
		MPa 35	mm -	93		34	M24X1,5	12	16	kg 0,447	NC16I04S000
		Psi 5075	inch -	3,66		1,34		0,47	0,63	lb 0,99	
QC VGA 20S BK MALE	25	MPa 35	mm 48	103	-	34	M30X2	16	20	kg 0,716	NC15I04S001
		Psi 5075	inch 1,89	4,06		1,34		0,63	0,79	lb 1,58	
		MPa 35	mm -	102		34	M30X2	16	20	kg 0,484	NC16I04S001
		Psi 5075	inch -	4,02		1,34		0,63	0,79	lb 1,07	
		MPa 35	mm 57	122,5	-	41	M30X2	16	20	kg 1,217	NC15I05S000
		Psi 5075	inch 2,24	4,82		1,61		0,63	0,79	lb 2,68	
		MPa 35	mm -	119		41	M30X2	16	20	kg 0,749	NC16I05S000
		Psi 5075	inch -	4,69		1,61		0,63	0,79	lb 1,65	
QC VGA 25S BK MALE	30	MPa 35	mm 57	122,5	-	41	M36X2	20	25	kg 1,398	NC15I05S001
		Psi 5075	inch 2,24	4,82		1,61		0,79	0,98	lb 3,08	
		MPa 35	mm -	119		41	M36X2	20	25	kg 0,84	NC16I05S001
		Psi 5075	inch -	4,69		1,61		0,79	0,98	lb 1,85	
		MPa 35	mm 57	124,5	-	46	M42X2	25	30	kg 1,566	NC15I05S002
		Psi 5075	inch 2,24	4,90		1,81		0,98	1,18	lb 3,45	
		MPa 35	mm --	121		46	M42X2	25	30	kg 0,948	NC16I05S002
		Psi 5075	inch -	4,76		1,81		0,98	1,18	lb 2,09	

SS  
Stainless Steel


**SCREW-TO-CONNECT-COUPINGS ISO 14541 DIN LIGHT BULKHEAD (QC male / female)**
**CS**  
Carbon Steel

TYPE	DN	PN	ØA	C	Øz	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE
QC VGA 8L BK MALE	10	MPa 35	mm 34	82		24	M14X1,5	6	8	kg 0,173	NC15M020000
		Psi 5075	inch 1,34	3,23		0,94		0,24	0,31	0,31 0,38	
		MPa 35	mm -	75,5		24	M14X1,5	6	8	kg 0,161	NC16M020000
		Psi 5075	inch -	2,97		0,94		0,24	0,31	lb 0,35	
		MPa 35	mm 34	83		24	M16X1,5	8	10	kg 0,175	NC15M020001
		Psi 5075	inch 1,34	3,27		0,94		0,31	0,39	0,39 0,39	
QC VGA 10L BK MALE	12,5	MPa 35	mm 34	83		24	M16X1,5	8	10	kg 0,178	NC16M020001
		Psi 5075	inch -	76,5		24	M16X1,5	8	10	kg 0,178	
		MPa 35	mm -	76,5		24	M28X2	0,31	0,39	lb 0,39	
		Psi 5075	inch -	3,01		0,94					
		MPa 35	mm 43	84		27	M16X1,5	8	10	kg 0,261	NC15M030000
		Psi 5075	inch 1,69	3,31		1,06		0,31	0,39	0,47 0,58	
QC VGA 10L BK FEMALE	12,5	MPa 35	mm -	73,5		27	M16X1,5	8	10	kg 0,289	NC16M030000
		Psi 5075	inch -	2,89		1,06		0,31	0,39	lb 0,64	
		MPa 35	mm 43	85		27	M18X1,5	10	12	kg 0,263	NC15M030001
		Psi 5075	inch 1,69	3,35		1,06		0,39	0,47	0,55 0,58	
		MPa 35	mm -	74,5		27	M18X1,5	10	12	kg 0,266	NC16M030001
		Psi 5075	inch -	2,93		1,06		0,39	0,47	lb 0,59	
QC VGA 12L BK MALE	20	MPa 35	mm 43	85		27	M36X2	12	15	kg 0,271	NC15M030002
		Psi 5075	inch 1,69	3,35		1,06		0,47	0,59	0,55 0,60	
		MPa 35	mm -	74,5		27	M36X2	12	15	kg 0,274	NC16M030002
		Psi 5075	inch -	2,93		1,06		0,47	0,59	0,55 0,60	
		MPa 35	mm 43	85		27	M22X1,5	15	18	kg 0,279	NC15M030003
		Psi 5075	inch 1,69	3,35		1,06		0,59	0,71	0,63 0,62	
QC VGA 12L BK FEMALE	20	MPa 35	mm -	74,5		27	M22X1,5	15	18	kg 0,282	NC16M030003
		Psi 5075	inch -	2,93		1,06		0,59	0,71	lb 0,62	
		MPa 35	mm 48	92		34	M22X1,5	12	15	kg 0,385	NC15M040000
		Psi 5075	inch 1,89	3,62		1,34		0,47	0,59	0,63 0,85	
		MPa 35	mm -	91		34	M42X2	12	15	kg 0,438	NC16M040000
		Psi 5075	inch -	3,58		1,34		0,47	0,59	lb 0,97	
QC VGA 18L BK MALE	25	MPa 35	mm 48	92		34	M26X1,5	15	18	kg 0,398	NC15M040001
		Psi 5075	inch 1,89	3,62		1,34		0,59	0,71	0,79 0,88	
		MPa 35	mm -	91		34	M42X2	15	18	kg 0,446	NC16M040001
		Psi 5075	inch -	3,58		1,34		0,59	0,71	lb 0,98	
		MPa 35	mm 48	99		34	M30X2	19	22	kg 0,413	NC15M040002
		Psi 5075	inch 1,89	3,90		1,34		0,75	0,87	0,79 0,91	
QC VGA 22L BK FEMALE	25	MPa 35	mm -	98		34	M42X2	19	22	kg 0,466	NC16M040002
		Psi 5075	inch -	3,86		1,34		0,75	0,87	lb 1,03	
		MPa 35	mm 57	118,5		41	M30X2	19	22	kg 0,767	NC15M050000
		Psi 5075	inch 2,24	4,67		1,61		0,75	0,87	0,98 1,69	
		MPa 35	mm -	115		41	M30X2	19	22	kg 0,764	NC16M050000
		Psi 5075	inch -	4,53		1,61		0,75	0,87	lb 1,68	
QC VGA 28L BK MALE	25	MPa 35	mm 57	118,5		41	M36X2	24	28	kg 0,786	NC15M050001
		Psi 5075	inch 2,24	4,67		1,61		0,94	1,10	1,18 1,73	
QC VGA 28L BK FEMALE	25	MPa 35	mm -	115		41	M48x2	24	28	kg 0,784	NC16M050001
		Psi 5075	inch -	4,53		1,61		0,94	1,10	lb 1,73	



## SCREW-TO-CONNECT-COUPLED ISO 14541 DIN LIGHT BULKHEAD (QC male / female)

TYPE	DN	PN	ØA	C	Øz	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE	SS Stainless Steel	
QC VGA 8L BK MALE	10	MPa 35	mm 34	82	24	M14X1,5	6	8	kg 0,173		NC15M02S000	Stainless Steel	
QC VGA 8L BK FEMALE		Psi 5075	inch 1,34	3,23	0,00		0,94	0,24	0,31	0,38			
QC VGA 10L BK MALE		MPa 35	mm -	75,5	24	M14X1,5	6	8	kg 0,161		NC16M02S000		
QC VGA 10L BK FEMALE		Psi 5075	inch -	2,97	0,94		0,24	0,31	lb 0,35				
QC VGA 10L BK MALE		MPa 35	mm 34	83	24	M16X1,5	8	10	kg 0,175		NC15M02S001		
QC VGA 10L BK FEMALE		Psi 5075	inch 1,34	3,27	0,00		0,94	0,31	0,39	0,39			
QC VGA 10L BK MALE		MPa 35	mm -	76,5	24	M16X1,5	8	10	kg 0,178		NC16M02S001		
QC VGA 10L BK FEMALE		Psi 5075	inch -	3,01	0,94		0,31	0,39	lb 0,39				
QC VGA 10L BK MALE		MPa 35	mm 43	84	27	M16X1,5	8	10	kg 0,261		NC15M03S000		
QC VGA 10L BK FEMALE		Psi 5075	inch 1,69	3,31	0,00		1,06	0,31	0,39	0,58			
QC VGA 10L BK MALE	12,5	MPa 35	mm -	73,5	27	M36X2	8	10	kg 0,289		NC16M03S000	Stainless Steel	
QC VGA 10L BK FEMALE		Psi 5075	inch -	2,89	1,06	M16X1,5	0,31	0,39	lb 0,64				
QC VGA 12L BK MALE		MPa 35	mm 43	85	27	M18X1,5	10	12	kg 0,263		NC15M03S001		
QC VGA 12L BK FEMALE		Psi 5075	inch 1,69	3,35	0,00		1,06	0,39	0,47	0,58			
QC VGA 12L BK MALE		MPa 35	mm -	74,5	27	M36X2	10	12	kg 0,266		NC16M03S001		
QC VGA 12L BK FEMALE		Psi 5075	inch -	2,93	1,06	M18X1,5	0,39	0,47	lb 0,59				
QC VGA 15L BK MALE		MPa 35	mm 43	85	27	M22X1,5	12	15	kg 0,271		NC15M03S002		
QC VGA 15L BK FEMALE		Psi 5075	inch 1,69	3,35	0,00		1,06	0,47	0,59	0,60			
QC VGA 15L BK MALE		MPa 35	mm -	74,5	27	M36X2	12	15	kg 0,274		NC16M03S002		
QC VGA 15L BK FEMALE		Psi 5075	inch -	2,93	1,06	M22X1,5	0,47	0,59	0,55	0,60			
QC VGA 18L BK MALE		MPa 35	mm 43	85	27	M26X1,5	15	18	kg 0,279		NC15M03S003		
QC VGA 18L BK FEMALE		Psi 5075	inch 1,69	3,35	0,00		1,06	0,59	0,71	0,62			
QC VGA 18L BK MALE		MPa 35	mm -	74,5	27	M36X2	15	18	kg 0,282		NC16M03S003		
QC VGA 18L BK FEMALE		Psi 5075	inch -	2,93	1,06	M26X1,5	0,59	0,71	lb 0,62				
QC VGA 15L BK MALE	20	MPa 35	mm 48	92	34	M22X1,5	12	15	kg 0,385		NC15M04S000	Stainless Steel	
QC VGA 15L BK FEMALE		Psi 5075	inch 1,89	3,62	0,00		1,34	0,47	0,59	0,85			
QC VGA 18L BK MALE		MPa 35	mm -	91	34	M42X2	12	15	kg 0,438		NC16M04S000		
QC VGA 18L BK FEMALE		Psi 5075	inch -	3,58	1,34	M22X1,5	0,47	0,59	lb 0,97				
QC VGA 22L BK MALE		MPa 35	mm 48	92	34	M26X1,5	15	18	kg 0,398		NC15M04S001		
QC VGA 22L BK FEMALE		Psi 5075	inch 1,89	3,62	0,00		1,34	0,59	0,71	0,88			
QC VGA 22L BK MALE		MPa 35	mm -	91	34	M42X2	15	18	kg 0,446		NC16M04S001		
QC VGA 22L BK FEMALE		Psi 5075	inch -	3,58	1,34	M26X1,5	0,59	0,71	lb 0,98				
QC VGA 22L BK MALE		MPa 35	mm 48	99	34	M30X2	19	22	kg 0,413		NC15M04S002		
QC VGA 22L BK FEMALE		Psi 5075	inch 1,89	3,90	0,00		1,34	0,75	0,87	0,91			
QC VGA 22L BK MALE	25	MPa 35	mm -	98	34	M42X2	19	22	kg 0,466		NC16M04S002	Stainless Steel	
QC VGA 22L BK FEMALE		Psi 5075	inch -	3,86	1,34	M30X2	0,75	0,87	lb 1,03				
QC VGA 22L BK MALE		MPa 35	mm 57	118,5	41	M30X2	19	22	kg 0,767		NC15M05S000		
QC VGA 22L BK FEMALE		Psi 5075	inch 2,24	4,67	0,00		1,61	0,75	0,87	1,69			
QC VGA 28L BK MALE		MPa 35	mm -	115	41	M48x2	19	22	kg 0,764		NC16M05S000		
QC VGA 28L BK FEMALE		Psi 5075	inch -	4,53	1,61	M30X2	0,75	0,87	lb 1,68				
QC VGA 28L BK MALE		MPa 35	mm 57	118,5	41	M36X2	24	28	kg 0,786		NC15M05S001		
QC VGA 28L BK FEMALE		Psi 5075	inch 2,24	4,67	0,00		1,61	0,94	1,10	1,73			




# VGB

## QUICK COUPLINGS

Edition. 21.0

### CS Carbon Steel

- Type: Quick Couplings
- Models: ISO 14540
- Sizes: from DN6 up to DN10
- Pressure: up to PN350

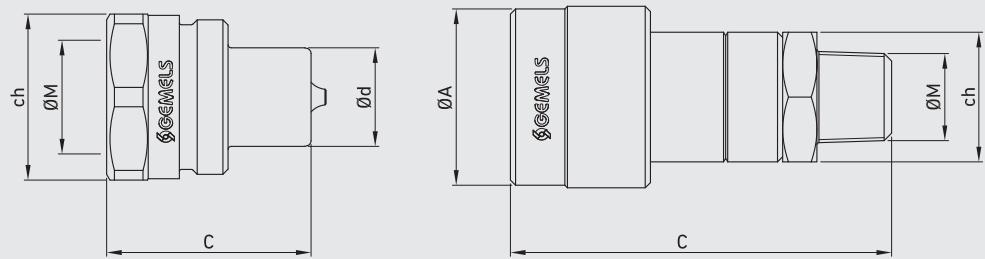


## CODE DESCRIPTION STRUCTURE

	QC	1/4	M/F	6,3	1	B
Type of coupling	QC					
VGB						
Ends		1/4	M/F			
NPT				6,3		
G 1/4					1	
G 3/8						B
MALE						
FEMALE						
DN/ISO						
6,3						
Body Material						
● 1 = 1,0737						
Seal material						
● B = NBR E = FKM*						



\*On request

- Cups
- Plugs



## QUICK COUPLINGS ISO 14540 VGB NPT WITH BALL VALVE / POPPET (QC male/female)

TYPE	DN	PN		ØA	C	Ød	ch	ØM	WEIGHT		ITEM CODE	
		MPa	Psi	mm	-	32,5	15,9	19	NPT 1/4	kg	lb	
QC VGB N 1/4 MALE	6,3	MPa	35	mm	-	32,5	15,9	19	NPT 1/4	kg	0,113	NC17N010000
		Psi	5075	inch	-	1,28	0,63			lb	0,25	
QC VGB N 1/4 FEMALE	6,3	MPa	35	mm	28,5	60,8	-	22	NPT 1/4	kg	0,07	NC18N010000
		Psi	5075	inch	1,12	2,39	-			lb	0,15	
QC VGB N 3/8 MALE	10	MPa	28	mm	-	35	19	32	NPT 3/8	kg	0,221	NC17N020000
		Psi	4060	inch	-	1,38	0,75			lb	0,49	
QC VGB N 3/8 FEMALE	10	MPa	28	mm	35	75,3	-	25	NPT 3/8	kg	0,111	NC18N020000
		Psi	4060	inch	1,38	2,96	-			lb	0,24	

CS  
Carbon  
Steel


 DG

## QUICK COUPLINGS

Edition. 21.0

 CS Carbon Steel

- Type: Quick Couplings
- Models: ISO 15141-1
- Sizes: from DN6
- Pressure: up to PN350

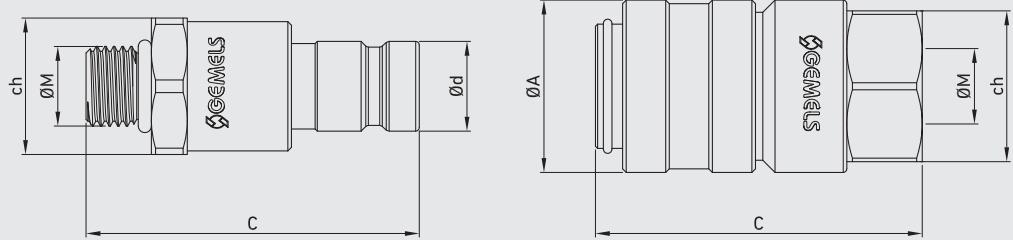



## CODE DESCRIPTION STRUCTURE



Type of coupling \_\_\_\_\_

DG

Ends \_\_\_\_\_

BSP    NPT    SAE

G1/8    N 1/8    SAE 4

G1/4    N 1/4

MALE \_\_\_\_\_

FEMALE

DN/ISO \_\_\_\_\_

6,3

Body Material \_\_\_\_\_


● 1 = 1,0737

Seal material \_\_\_\_\_

B = NBR   E = FKM\*


\*On request

- Cups
- Plugs




## ■ QUICK COUPLINGS ISO 15171-1 DG BSP (QC male-female)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE	CS Carbon Steel
QC DG G 1/8 MALE	6,3	MPa 35	mm -	42,8	12,6	19	G 1/8	kg 0,039	NC19G010000	
Psi 5075		inch -	1,69	0,50	lb 0,09					
QC DG G 1/8 FEMALE	6,3	MPa 35	mm 24	50	-	21	G 1/8	kg 0,048	NC20G010000	
Psi 5075		inch 0,94	1,97	-	lb 0,11					
QC DG G 1/4 MALE	6,3	MPa 35	mm -	42,8	12,6	19	G 1/4	kg 0,049	NC19G010001	
Psi 5075		inch -	1,69	0,50	lb 0,11					
QC DG G 1/4 FEMALE	6,3	MPa 35	mm 24	50	-	21	G 1/4	kg 0,05	NC20G010001	
Psi 5075		inch 0,94	1,97	-	lb 0,11					



## ■ QUICK COUPLINGS ISO 15171-1 DG NPT (QC male-female)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE	CS Carbon Steel
QC DG N 1/8 MALE	6,3	MPa 35	mm -	42,8	12,6	19	N 1/8	kg 0,039	NC19N010000	
Psi 5075		inch -	1,69	0,50	lb 0,09					
QC DG N 1/8 FEMALE	6,3	MPa 35	mm 24	50	-	21	N 1/8	kg 0,048	NC20N010000	
Psi 5075		inch 0,94	1,97	-	lb 0,11					
QC DG N 1/4 MALE	6,3	MPa 35	mm -	42,8	12,6	19	N 1/4	kg 0,049	NC19N010001	
Psi 5075		inch -	1,69	0,50	lb 0,11					
QC DG N 1/4 FEMALE	6,3	MPa 35	mm 24	50	-	21	N 1/4	kg 0,05	NC20N010001	
Psi 5075		inch 0,94	1,97	-	lb 0,11					



## ■ QUICK COUPLINGS ISO 15171-1 DG SAE (QC male-female)

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE	
									CS Carbon Steel	
QC DG SAE4 MALE	6,3	MPa      35	mm	-	42,8	12,6	19	SAE 4	kg      0,049	
		Psi      5075	inch	-	1,69	0,50			lb      0,11	
QC DG SAE 4 FEMALE		MPa      35	mm	24	50	-	21	SAE 4	kg      0,05	
		Psi      5075	inch	0,94	1,97	-			lb      0,11	



# BALL VALVES WITH INTEGRATED QUICK COUPLINGS

GE2 FF\* / GE2 A\* / GE2 PP\* / GE2 VGA\*

\* Patent

Edition. 21.0

## CS Carbon Steel




- Model: Ball Valve GE2 with Integrated Quick Coupling **FLAT FACE**  
• Sizes: from DN10 up to DN25  
• Pressure: up to PN350
- Model: Ball Valve GE2 with Integrated Quick Coupling **ISO A**  
• Sizes: from DN10 up to DN25  
• Pressure: up to PN350
- Model: Ball Valve GE2 with Integrated Quick Coupling **PUSH-PULL**  
• Sizes: from DN10 up to DN25  
• Pressure: up to PN350
- Model: Ball Valve GE2 with Integrated Quick Coupling **VGA**  
• Sizes: from DN10 up to DN25  
• Pressure: up to PN350





## CODE DESCRIPTION STRUCTURE

Type and way of valve	GE2	G1/2	DN13	FF	Nominal dimension	TYPE AND WAY OF QC	M/F	NOMINAL DIMENSION
GE2 2-way								
Ends								
GAS DIN/ ISO 228 BSP	NPT ANSI /ASME B1.20.1	SAE J1926-1	DIN 2353 HEAVY SERIES	DIN 2353 LIGHT SERIES				
G 3/8	N 3/8	SAE6	12S	10L	DN10	ISO 16028 FF	MALE	10
G 1/2	N 1/2	SAE8	14S	12L	DN13	ISO 7241/A	FEMALE	12,5
G 3/4	N 3/4	SAE12	16S	15L	DN20	ISO 7241/A PUSH-PULL		20
G 1	N 1	SAE16	20S	18L	DN25	Screw to connect couplings ISO 14541		25
			25S	22L				
			30S	28L				
			38S	35L				

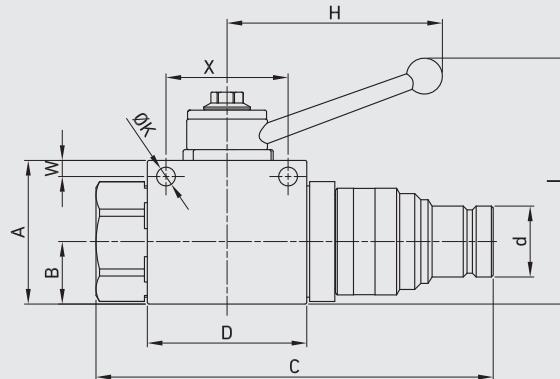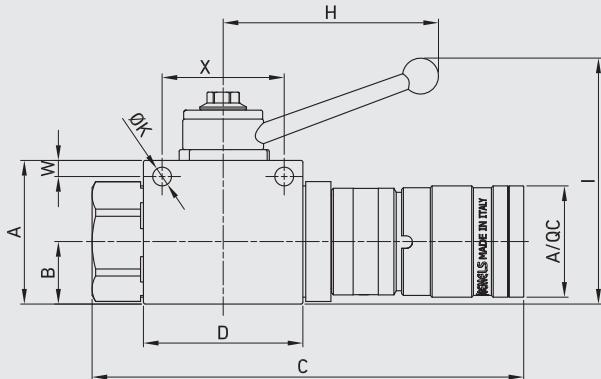**GE2 FF**
**FIXING HOLES INCLUDED**

**GE2 DIN/ISO 228 BSP**
**CS**



Carbon Steel

TYPE	DN	PN	A	B	C	D	d	E	F	G	H	I	A/QC	ØM	ØK*	W*	X*	SW	ØLW	ITEM CODE
GE2 G3/8 + QC FF 10 MALE	6	MPa 35	mm 40	17,4	110,6	44,4	19,75	11	54,25	35	110	93	-	G 3/8	5,25	4,5	34	9	10	NC05G0200GET230
		Psi 5075	inch 1,57	0,69	4,35	1,75	0,78	0,43	2,14	1,38	4,33	3,66	-		0,21	0,18	1,34	0,35	0,39	
GE2 G3/8 + QC FF 10 FEMALE	10	MPa 35	mm 40	17,4	120,2	44,4	-	11	54,25	35	110	93	31	G 3/8	5,25	4,5	34	9	10	NC06G0200GET230
		Psi 5075	inch 1,57	0,69	4,73	1,75	-	0,43	2,14	1,38	4,33	3,66	1,22		0,21	0,18	1,34	0,35	0,39	
GE2 G1/2 + QC FF 12,5 MALE	13	MPa 35	mm 43	19,7	123,5	48,4	24,5	11	57	37	110	97	-	G 1/2	5,25	5	36	9	13	NC05G0300GET330
		Psi 5075	inch 1,69	0,78	4,86	1,91	0,96	0,43	2,24	1,46	4,33	3,82	-		0,21	0,20	1,42	0,35	0,51	
GE2 G1/2 + QC FF 12,5 FEMALE	20	MPa 35	mm 43	19,7	129,5	48,4	-	11	57	37	110	97	38	G 1/2	5,25	5	36	9	13	NC06G0300GET330
		Psi 5075	inch 1,69	0,78	5,10	1,91	-	0,43	2,24	1,46	4,33	3,82	1,50		0,21	0,20	1,42	0,35	0,51	
GE2 G3/4 + QC FF 19 MALE	25	MPa 35	mm 57	25,4	139	62,5	29,95	14	75,5	49	180	105	-	G 3/4	6,25	6	50	14	20	NC05G0400GET430
		Psi 5075	inch 2,24	1,00	5,47	2,46	1,18	0,55	2,97	1,93	7,09	4,13	-		0,25	0,24	1,97	0,55	0,79	
GE2 G3/4 + QC FF 19 FEMALE	25	MPa 35	mm 57	25,4	150	62,5	-	14	75,5	49	180	105	45	G 3/4	6,25	6	50	14	20	NC06G0400GET430
		Psi 5075	inch 2,24	1,00	5,91	2,46	-	0,55	2,97	1,93	7,09	4,13	1,77		0,25	0,24	1,97	0,55	0,79	
GE2 G1 + QC FF 25 MALE	25	MPa 35	mm 65	29,5	172,5	66,5	36	14	83,5	55	180	113	-	G 1	6,25	6	50	14	25	NC05G0500GET530
		Psi 5075	inch 2,56	1,16	6,79	2,62	-	0,55	3,29	2,17	7,09	4,45	-		0,25	0,24	1,97	0,55	0,98	
GE2 G1 + QC FF 25 FEMALE	25	MPa 35	mm 65	29,5	172,5	66,5	-	14	83,5	55	180	113	54,5	G 1	6,25	6	50	14	25	NC06G0500GET530
		Psi 5075	inch 2,56	1,16	6,79	2,62	-	0,55	3,29	2,17	7,09	4,45	2,15		0,25	0,24	1,97	0,55	0,98	



## GE2 FF

FIXING HOLES INCLUDED

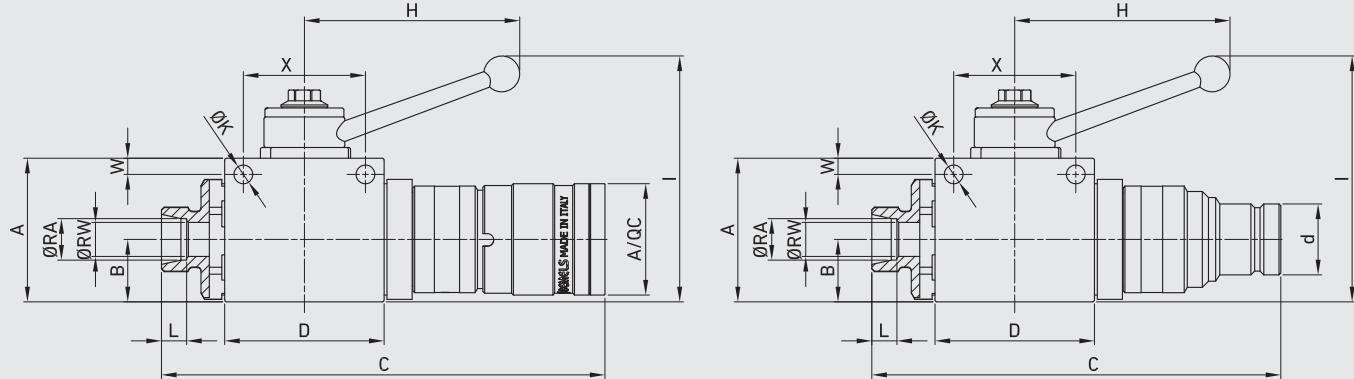


## GE2 DIN 2353 HEAVY SERIES

CS

Carbon Steel




TYPE	DN	PN	A	B	C	D	d	E	F	G	H	I	A/QC	ØM	ØK*	W*	X*	SW	ØLW	ØRA	ITEM CODE
GE2 12S + QC FF 10 MALE	10	MPa 35 Psi 5075	mm 40 inch 1,57	17,4 0,69	112,1 4,41	44,4 1,75	19,75 0,78	11 0,43	54,25 2,14	35 1,38	110 4,33	93 3,66	-	M20x1,5	5,25 0,21	4,5 0,18	34 1,34	9 0,35	10 0,39	12 0,47	NC05H0200GET230
GE2 12S + QC FF 10 FEMALE	10	MPa 35 Psi 5075	mm 40 inch 1,57	17,4 0,69	121,7 4,79	44,4 1,75	-	11 0,43	54,25 2,14	35 1,38	110 4,33	93 3,66	31 1,22	M20x1,5	5,25 0,21	4,5 0,18	34 1,34	9 0,35	10 0,39	12 0,47	NC06H0200GET230
GE2 14S + QC FF 10 MALE	10	MPa 35 Psi 5075	mm 40 inch 1,57	17,4 0,69	115,3 4,54	44,4 1,75	19,75 0,78	11 0,43	54,25 2,14	35 1,38	110 4,33	93 3,66	-	M22x1,5	5,25 0,21	4,5 0,18	34 1,34	9 0,35	10 0,39	14 0,55	NC05H0201GET230
GE2 14S + QC FF 10 FEMALE	10	MPa 35 Psi 5075	mm 40 inch 1,57	17,4 0,69	125 4,92	44,4 1,75	-	11 0,43	54,25 2,14	35 1,38	110 4,33	93 3,66	31 1,22	M22x1,5	5,25 0,21	4,5 0,18	34 1,34	9 0,35	10 0,39	14 0,55	NC06H0201GET230
GE2 16S + QC FF 12,5 MALE	13	MPa 35 Psi 5075	mm 43 inch 1,69	19,7 0,78	126,5 4,98	48,4 1,91	24,5 0,96	11 0,43	57 2,24	37 1,46	110 4,33	97 3,82	-	M24x1,5	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	16 0,63	NC05H0300GET330
GE2 16S + QC FF 12,5 FEMALE	13	MPa 35 Psi 5075	mm 43 inch 1,69	19,7 0,78	132,5 5,22	48,4 1,91	-	11 0,43	57 2,24	37 1,46	110 4,33	97 3,82	38 1,50	M24x1,5	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	16 0,63	NC06H0300GET330
GE2 20S + QC FF 12,5 MALE	13	MPa 35 Psi 5075	mm 43 inch 1,69	19,7 0,78	128,5 5,06	48,4 1,91	24,5 0,96	11 0,43	57 2,24	37 1,46	110 4,33	97 3,82	-	M30x2	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	20 0,79	NC05H0301GET330
GE2 20S + QC FF 12,5 FEMALE	13	MPa 35 Psi 5075	mm 43 inch 1,69	19,7 0,78	134,5 5,30	48,4 1,91	-	11 0,43	57 2,24	37 1,46	110 4,33	97 3,82	38 1,50	M30x2	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	20 0,79	NC06H0301GET330
GE2 25S + QC FF 19 MALE	19	MPa 35 Psi 5075	mm 57 inch 2,24	25,4 1,00	147,2 5,80	62,5 2,46	29,95 1,18	14 0,55	75,5 2,97	49 1,93	180 7,09	105 4,13	-	M36x2	6,25 0,25	6 0,24	50 1,97	14 0,55	20 0,79	25 0,98	NC05H0400GET430
GE2 25S + QC FF 19 FEMALE	19	MPa 35 Psi 5075	mm 57 inch 2,24	25,4 1,00	158 6,22	62,5 2,46	-	14 0,55	75,5 2,97	49 1,93	180 7,09	105 4,13	45 1,77	M36x2	6,25 0,25	6 0,24	50 1,97	14 0,55	20 0,79	25 0,98	NC06H0400GET430
GE2 30S + QC FF 25 MALE	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5 1,16	176,5 6,95	66,5 2,62	36 1,42	14 0,55	83,5 3,29	55 2,17	180 7,09	113 4,45	-	M42x2	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	30 1,18	NC05H0500GET530
GE2 30S + QC FF 25 FEMALE	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5 1,16	176,5 6,95	66,5 2,62	-	14 0,55	83,5 3,29	55 2,17	180 7,09	113 4,45	M42x2	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	30 1,18	NC06H0500GET530	
GE2 38S + QC F FF 25 MALE	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5 1,16	182 7,17	66,5 2,62	36 1,42	14 0,55	83,5 3,29	55 2,17	180 7,09	113 4,45	-	M52x2	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	38 1,50	NC05H0501GET530
GE2 38S + QC F FF 25 FEMALE	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5 1,16	182 7,17	66,5 2,62	-	14 0,55	83,5 3,29	55 2,17	180 7,09	113 4,45	M52x2	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	38 1,50	NC06H0501GET530	

## GE2 FF




## GE2 DIN 2353 LIGHT SERIES

TYPE	DN	PN														CS Carbon Steel	ITEM CODE				
			A	B	C	D	d	E	F	G	H	I	A/QC	ØM	ØK*	W*	X*	SW	ØLW	ØRA	
GE2 10L + QC FF 10 MALE	10	MPa 35 Psi 5075	mm 40 inch 1,57	17,4 0,69	112,3 4,42	44,4 1,75	19,75 0,78	11 0,43	54,25 2,14	35 1,38	110 4,33	93 3,66	-	M16x1,5	5,25 0,21	4,5 0,18	34 1,34	9 0,35	8 0,31	10 0,39	NC05L0200GET230
GE2 10L + QC FF 10 FEMALE	10	MPa 35 Psi 5075	mm 40 inch 1,57	17,4 0,69	122 4,80	44,4 1,75	-	11 0,43	54,25 2,14	35 1,38	110 4,33	93 3,66	31 1,22	M16x1,5	5,25 0,21	4,5 0,18	34 1,34	9 0,35	8 0,31	10 0,39	NC06L0200GET230
GE2 12L + QC FF 10 MALE	10	MPa 35 Psi 5075	mm 40 inch 1,57	17,4 0,69	113,9 4,48	44,4 1,75	19,75 0,78	11 0,43	54,25 2,14	35 1,38	110 4,33	93 3,66	-	M18x1,5	5,25 0,21	4,5 0,18	34 1,34	9 0,35	10 0,39	12 0,47	NC05L0201GET230
GE2 12L + QC FF 10 FEMALE	10	MPa 35 Psi 5075	mm 40 inch 1,57	17,4 0,69	123,5 4,86	44,4 1,75	-	11 0,43	54,25 2,14	35 1,38	110 4,33	93 3,66	31 1,22	M18x1,5	5,25 0,21	4,5 0,18	34 1,34	9 0,35	10 0,39	12 0,47	NC06L0201GET230
GE2 15L + QC FF 12,5 MALE	13	MPa 35 Psi 5075	mm 43 inch 1,69	19,7 0,78	125,5 4,94	48,4 1,91	24,5 0,96	11 0,43	57 2,24	37 1,46	110 4,33	97 3,82	-	M22x1,5	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	15 0,59	NC05L0300GET330
GE2 15L + QC FF 12,5 FEMALE	13	MPa 35 Psi 5075	mm 43 inch 1,69	19,7 0,78	131,5 5,18	48,4 1,91	-	11 0,43	57 2,24	37 1,46	110 4,33	97 3,82	38 1,50	M22x1,5	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	15 0,59	NC06L0300GET330
GE2 18L + QC FF 12,5 MALE	13	MPa 35 Psi 5075	mm 43 inch 1,69	19,7 0,78	125,5 4,94	48,4 1,91	24,5 0,96	11 0,43	57 2,24	37 1,46	110 4,33	97 3,82	-	M26x1,5	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	18 0,71	NC05L0301GET330
GE2 18L + QC FF 12,5 FEMALE	13	MPa 35 Psi 5075	mm 43 inch 1,69	19,7 0,78	131,5 5,18	48,4 1,91	-	11 0,43	57 2,24	37 1,46	110 4,33	97 3,82	38 1,50	M26x1,5	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	18 0,71	NC06L0301GET330
GE2 22L + QC FF 19 MALE	19	MPa 35 Psi 5075	mm 57 inch 2,24	25,4 1,00	146,7 5,78	62,5 2,46	29,95 1,18	14 0,55	75,5 2,97	49 1,93	180 7,09	105 4,13	-	M30x2	6,25 0,25	6 0,24	50 1,97	14 0,55	20 0,79	22 0,87	NC05L0400GET430
GE2 22L + QC FF 19 FEMALE	19	MPa 35 Psi 5075	mm 57 inch 2,24	25,4 1,00	157,7 6,21	62,5 2,46	-	14 0,55	75,5 2,97	49 1,93	180 7,09	105 4,13	45 1,77	M30x2	6,25 0,25	6 0,24	50 1,97	14 0,55	20 0,79	22 0,87	NC06L0400GET430
GE2 28L + QC FF 25 MALE	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5 1,16	175 6,89	66,5 2,62	36 1,42	14 0,55	83,5 3,29	55 2,17	180 7,09	113 4,45	-	M36x2	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	28 1,10	NC05L0500GET530
GE2 28L + QC FF 25 FEMALE	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5 1,16	175 6,89	66,5 2,62	-	14 0,55	83,5 3,29	55 2,17	180 7,09	113 4,45	54,5 2,15	M36x2	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	28 1,10	NC06L0500GET530
GE2 35L + QC FF 25 MALE	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5 1,16	176 6,93	66,5 2,62	36 1,42	14 0,55	83,5 3,29	55 2,17	180 7,09	113 4,45	-	M45x2	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	35 1,38	NC05L0501GET530
GE2 35L + QC FF 25 FEMALE	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5 1,16	176 6,93	66,5 2,62	-	14 0,55	83,5 3,29	55 2,17	180 7,09	113 4,45	54,5 2,15	M45x2	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	35 1,38	NC06L0501GET530

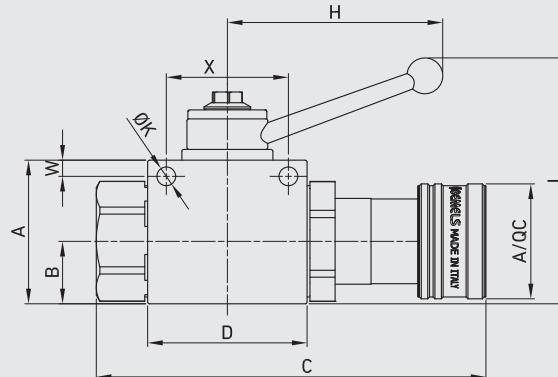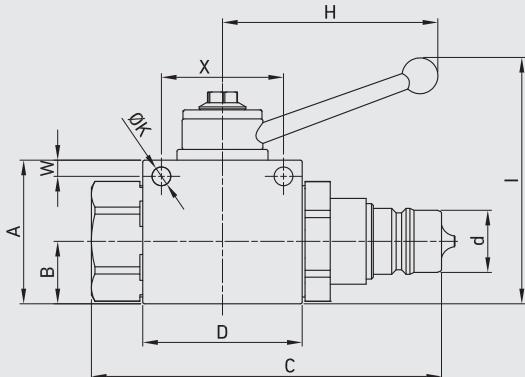
**GE2 A**
**FIXING HOLES INCLUDED**

**GE2 DIN/ISO 228 BSP**
**CS**

Carbon Steel




TYPE	DN	PN	A	B	C	D	d	E	F	G	H	I	A/QC	ØM	ØK*	W*	X*	SW	ØLW	ITEM CODE
GE2 G3/8 + QC A 10 MALE	10	MPa 35	mm 40	17,4	97,5	44,4	17,3	11	54,25	35	110	93	-	G 3/8	5,25	4,5	34	9	10	NC01G0200GET230
		Psi 5075	inch 1,57	0,69	3,84	1,75	0,68	0,43	2,14	1,38	4,33	3,66	-		0,21	0,18	1,34	0,35	0,39	
GE2 G3/8 + QC A 10 FEMALE	10	MPa 35	mm 40	17,4	108,5	44,4	-	11	54,25	35	110	93	32	G 3/8	5,25	4,5	34	9	10	NC02G0200GET230
		Psi 5075	inch 1,57	0,69	4,27	1,75	-	0,43	2,14	1,38	4,33	3,66	1,26		0,21	0,18	1,34	0,35	0,39	
GE2 G1/2 + QC A 12,5 MALE	13	MPa 35	mm 43	19,7	114,5	48,4	20,5	11	57	37	110	97	-	G 1/2	5,25	5	36	9	13	NC01G0300GET330
		Psi 5075	inch 1,69	0,78	4,51	1,91	0,81	0,43	2,24	1,46	4,33	3,82	-		0,21	0,20	1,42	0,35	0,51	
GE2 G1/2 + QC A 12,5 FEMALE	13	MPa 35	mm 43	19,7	121	48,4	-	11	57	37	110	97	38,25	G 1/2	5,25	5	36	9	13	NC01G0300GET330
		Psi 5075	inch 1,69	0,78	4,76	1,91	-	0,43	2,24	1,46	4,33	3,82	1,51		0,21	0,20	1,42	0,35	0,51	
GE2 G3/4 + QC A 20 MALE	20	MPa 35	mm 57	25,4	131	62,5	29,1	14	75,5	49	180	105	-	G 3/4	6,25	6	50	14	20	NC01G0400GET430
		Psi 5075	inch 2,24	1,00	5,16	2,46	1,15	0,55	2,97	1,93	7,09	4,13	-		0,25	0,24	1,97	0,55	0,79	
GE2 G3/4 + QC A 20 FEMALE	20	MPa 35	mm 57	25,4	146,5	62,5	-	14	75,5	49	180	105	48	G 3/4	6,25	6	50	14	20	NC02G0400GET430
		Psi 5075	inch 2,24	1,00	5,77	2,46	-	0,55	2,97	1,93	7,09	4,13	1,89		0,25	0,24	1,97	0,55	0,79	
GE2 G1 + QC A 25 MALE	25	MPa 35	mm 65	29,5	166,5	66,5	34,34	14	83,5	55	180	113	-	G 1	6,25	6	50	14	25	NC01G0500GET530
		Psi 5075	inch 2,56	1,16	6,56	2,62	1,35	0,55	3,29	2,17	7,09	4,45	-		0,25	0,24	1,97	0,55	0,98	
GE2 G1 + QC A 25 FEMALE	25	MPa 35	mm 65	29,5	182	66,5	-	14	83,5	55	180	113	56	G 1	6,25	6	50	14	25	NC02G0500GET530
		Psi 5075	inch 2,56	1,16	7,17	2,62	-	0,55	3,29	2,17	7,09	4,45	2,20		0,25	0,24	1,97	0,55	0,98	

**GE2 A****GE2 ANSI/ASME B1.20.1 NPT**


TYPE	DN	PN	A	B	C	D	d	E	F	G	H	I	A/QC	ØM	ØK*	W*	X*	SW	ØLW	ITEM CODE
GE2 N3/8 + QC A 10 MALE	10	MPa 35	mm 40	17,4	97,5	44,4	17,3	11	54,25	35	110	93	-	N 3/8	5,25	4,5	34	9	10	NC01N0200GET230
		Psi 5075	inch 1,57	0,69	3,84	1,75	0,68	0,43	2,14	1,38	4,33	3,66	-		0,21	0,18	1,34	0,35	0,39	
GE2 N3/8 + QC A 10 FEMALE	10	MPa 35	mm 40	17,4	108,5	44,4	-	11	54,25	35	110	93	32	N 3/8	5,25	4,5	34	9	10	NC02N0200GET230
		Psi 5075	inch 1,57	0,69	4,27	1,75	-	0,43	2,14	1,38	4,33	3,66	1,26		0,21	0,18	1,34	0,35	0,39	
GE2 N1/2 + QC A 12,5 MALE	13	MPa 35	mm 43	19,7	114,5	48,4	20,5	11	57	37	110	97	-	N 1/2	5,25	5	36	9	13	NC01N0300GET330
		Psi 5075	inch 1,69	0,78	4,51	1,91	0,81	0,43	2,24	1,46	4,33	3,82	-		0,21	0,20	1,42	0,35	0,51	
GE2 N1/2 + QC A 12,5 FEMALE	13	MPa 35	mm 43	19,7	121	48,4	-	11	57	37	110	97	38,25	N 1/2	5,25	5	36	9	13	NC01N0300GET330
		Psi 5075	inch 1,69	0,78	4,76	1,91	-	0,43	2,24	1,46	4,33	3,82	1,51		0,21	0,20	1,42	0,35	0,51	
GE2 N3/4 + QC A 20 MALE	20	MPa 35	mm 57	25,4	131	62,5	29,1	14	75,5	49	180	105	-	N 3/4	6,25	6	50	14	20	NC01N0400GET430
		Psi 5075	inch 2,24	1,00	5,16	2,46	1,15	0,55	2,97	1,93	7,09	4,13	-		0,25	0,24	1,97	0,55	0,79	
GE2 N3/4 + QC A 20 FEMALE	20	MPa 35	mm 57	25,4	146,5	62,5	-	14	75,5	49	180	105	48	N 3/4	6,25	6	50	14	20	NC02N0400GET430
		Psi 5075	inch 2,24	1,00	5,77	2,46	-	0,55	2,97	1,93	7,09	4,13	1,89		0,25	0,24	1,97	0,55	0,79	
GE2 N1 + QC A 25 MALE	25	MPa 35	mm 65	29,5	166,5	66,5	34,34	14	83,5	55	180	113	-	N 1	6,25	6	50	14	25	NC01N0500GET530
		Psi 5075	inch 2,56	1,16	6,56	2,62	1,35	0,55	3,29	2,17	7,09	4,45	-		0,25	0,24	1,97	0,55	0,98	
GE2 N1 + QC A 25 FEMALE	25	MPa 35	mm 65	29,5	182	66,5	-	14	83,5	55	180	113	56	N 1	6,25	6	50	14	25	NC02N0500GET530
		Psi 5075	inch 2,56	1,16	7,17	2,62	-	0,55	3,29	2,17	7,09	4,45	2,20		0,25	0,24	1,97	0,55	0,98	

**GE2 SAE J1926-1**


TYPE	DN	PN	A	B	C	D	d	E	F	G	H	I	A/QC	ØM	ØK*	W*	X*	SW	ØLW	ITEM CODE
GE2 SAE6 + QC A 10 MALE	10	MPa 35	mm 40	17,5	110,6	44,4	19,75	11,1	54,25	35	110	93	-	9/16	5,25	4,5	34	9	10	NC01S0200GET230
		Psi 5075	inch 1,57	0,69	4,35	1,75	0,78	0,44	2,14	1,38	4,33	3,66	-		0,21	0,18	1,34	0,35	0,39	
GE2 SAE6 + QC A 10 FEMALE	10	MPa 35	mm 40	17,5	120,2	44,4	-	11,1	54,25	35	110	93	31	UNF	5,25	4,5	34	9	10	NC02S0200GET230
		Psi 5075	inch 1,57	0,69	4,73	1,75	-	0,44	2,14	1,38	4,33	3,66	1,22		0,21	0,18	1,34	0,35	0,39	
GE2 SAE8 + QC A 12,5 MALE	13	MPa 35	mm 43	19,7	123,5	48,4	24,5	11,1	57,25	37	110	97	-	3/4	5,25	5	36	9	13	NC01S0300GET330
		Psi 5075	inch 1,69	0,78	4,86	1,91	0,96	0,44	2,25	1,46	4,33	3,82	-		0,21	0,20	1,42	0,35	0,51	
GE2 SAE8 + QC A 12,5 FEMALE	13	MPa 35	mm 43	19,7	129,5	48,4	-	11,1	57,25	37	110	97	38	UNF	5,25	5	36	9	13	NC01S0300GET330
		Psi 5075	inch 1,69	0,78	5,10	1,91	-	0,44	2,25	1,46	4,33	3,82	1,50		0,21	0,20	1,42	0,35	0,51	
GE2 SAE12 + QC A 20 MALE	19	MPa 35	mm 57	25,4	139	62,5	29,95	14,35	75,5	49	180	105	-	1 1/16	6,25	6	50	14	20	NC01S0400GET430
		Psi 5075	inch 2,24	1,00	5,47	2,46	1,18	0,56	2,97	1,93	7,09	4,13	-		0,25	0,24	1,97	0,55	0,79	
GE2 SAE12 + QC A 20 FEMALE	19	MPa 35	mm 57	25,4	150	62,5	-	14,35	75,5	49	180	105	45	UNF	6,25	6	50	14	20	NC02S0400GET430
		Psi 5075	inch 2,24	1,00	5,91	2,46	-	0,56	2,97	1,93	7,09	4,13	1,77		0,25	0,24	1,97	0,55	0,79	
GE2 SAE16 + QC A 25 MALE	25	MPa 35	mm 65	29,5	172,5	66,5	36	14,35	83,5	55	180	113	-	1 5/16	6,25	6	50	14	25	NC01S0500GET530
		Psi 5075	inch 2,56	1,16	6,79	2,62	-	0,56	3,29	2,17	7,09	4,45	-		0,25	0,24	1,97	0,55	0,98	
GE2 SAE16 + QC A 25 FEMALE	25	MPa 35	mm 65	29,5	172,5	66,5	-	14,35	83,5	55	180	113	54,5	UNF	6,25	6	50	14	25	NC02S0500GET530
		Psi 5075	inch 2,56	1,16	6,79	2,62	-	0,56	3,29	2,17	7,09	4,45	2,15		0,25	0,24	1,97	0,55	0,98	

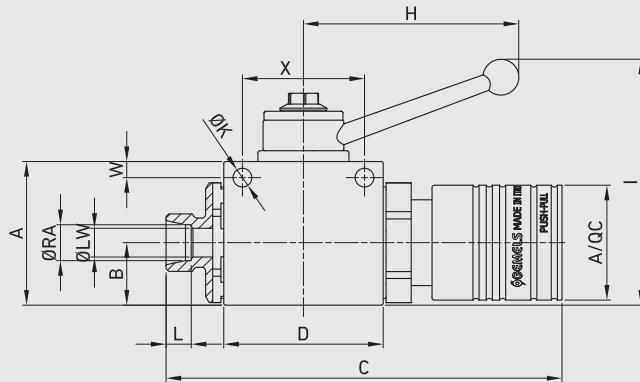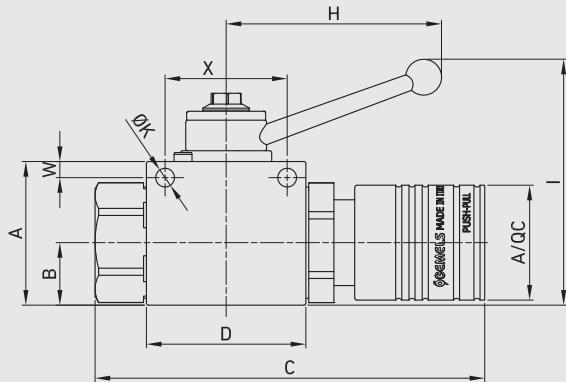**GE2 PP**
**FIXING HOLES INCLUDED**

**■ GE2 DIN/ISO 228 BSP (\*male type see ISO 7241/A)**
**CS**  
Carbon Steel

TYPE	DN	PN	A	B	C	D	d	E	F	G	H	I	A/QC	ØM	ØK*	W*	X*	SW	ØLW	ITEM CODE
GE2 G3/8 + QC PP 10 FEMALE	10	MPa 35	mm 40	17,4	108,5	44,4	-	11	54,25	35	110	93	32	G 3/8	5,25	4,5	34	9	10	NC12G0200GET230
		Psi 5075	inch 1,57	0,69	4,27	1,75	-	0,43	2,14	1,38	4,33	3,66	1,26		0,21	0,18	1,34	0,35	0,39	
GE2 G1/2 + QC PP 12,5 FEMALE	13	MPa 35	mm 43	19,7	121	48,4	-	11	57	37	110	97	38	G 1/2	5,25	5	36	9	13	NC12G0300GET330
		Psi 5075	inch 1,69	0,78	4,76	1,91	-	0,43	2,24	1,46	4,33	3,82	1,50		0,21	0,20	1,42	0,35	0,51	
GE2 G3/4 + QC PP 20 FEMALE	20	MPa 35	mm 57	25,4	146,5	62,5	-	14	75,5	49	180	105	47	G 3/4	6,25	6	50	14	20	NC12G0400GET430
		Psi 5075	inch 2,24	1,00	5,77	2,46	-	0,55	2,97	1,93	7,09	4,13	1,85		0,25	0,24	1,97	0,55	0,79	
GE2 G1 + QC PP 25 FEMALE	25	MPa 35	mm 65	29,5	182	66,5	-	14	83,5	55	180	113	55	G 1	6,25	6	50	14	25	NC12G0500GET530
		Psi 5075	inch 2,56	1,16	7,17	2,62	-	0,55	3,29	2,17	7,09	4,45	2,17		0,25	0,24	1,97	0,55	0,98	



**GE2 PP**
**GE2 ANSI/ASME B1.20.1 NPT (\*male type see ISO 7241/A)**

TYPE	DN	PN														CS Carbon Steel	ITEM CODE			
			A	B	C	D	d	E	F	G	H	I	A/QC	ØM	ØK*	W*	X*	SW	ØLW	
GE2 N3/8 + QC PP 10 FEMALE	10	MPa 35	mm 40	17,4	108,5	44,4	-	11	54,25	35	110	93	32	N 3/8	5,25	4,5	34	9	10	NC12N0200GET230
		Psi 5075	inch 1,57	0,69	4,27	1,75	-	0,43	2,14	1,38	4,33	3,66	1,26		0,21	0,18	1,34	0,35	0,39	
GE2 N1/2 + QC PP 12,5 FEMALE	13	MPa 35	mm 43	19,7	121	48,4	-	11	57	37	110	97	38	N 1/2	5,25	5	36	9	13	NC12N0300GET330
		Psi 5075	inch 1,69	0,78	4,76	1,91	-	0,43	2,24	1,46	4,33	3,82	1,50		0,21	0,20	1,42	0,35	0,51	
GE2 N3/4 + QC PP 20 FEMALE	20	MPa 35	mm 57	25,4	146,5	62,5	-	14	75,5	49	180	105	47	N 3/4	6,25	6	50	14	20	NC12N0400GET430
		Psi 5075	inch 2,24	1,00	5,77	2,46	-	0,55	2,97	1,93	7,09	4,13	1,85		0,25	0,24	1,97	0,55	0,79	
GE2 N1 + QC PP 25 FEMALE	25	MPa 35	mm 65	29,5	182	66,5	-	14	83,5	55	180	113	55	N 1	6,25	6	50	14	25	NC12N0500GET530
		Psi 5075	inch 2,56	1,16	7,17	2,62	-	0,55	3,29	2,17	7,09	4,45	2,17		0,25	0,24	1,97	0,55	0,98	


**GE2 SAE J1926-1**

TYPE	DN	PN														CS Carbon Steel	ITEM CODE			
			A	B	C	D	d	E	F	G	H	I	A/QC	ØM	ØK*	W*	X*	SW	ØLW	
GE2 SAE6 + QC PP 10 FEMALE	10	MPa 35	mm 40	17,5	108,5	44,4	-	11,1	54,25	35	110	93	32	9/16	5,25	4,5	34	9	10	NC12S0200GET230
		Psi 5075	inch 1,57	0,69	4,27	1,75	-	0,44	2,14	1,38	4,33	3,66	1,26		UNF	0,21	0,18	1,34	0,35	0,39
GE2 SAE8 + QC PP 12,5 FEMALE	13	MPa 35	mm 43	19,7	121	48,4	-	11,1	57,25	37	110	97	38	3/4	5,25	5	36	9	13	NC12S0300GET330
		Psi 5075	inch 1,69	0,78	4,76	1,91	-	0,44	2,25	1,46	4,33	3,82	1,50		UNF	0,21	0,20	1,42	0,35	0,51
GE2 SAE12 + QC PP 20 FEMALE	20	MPa 35	mm 57	25,4	146,5	62,5	-	14,35	75,5	49	180	105	47	1 1/16	6,25	6	50	14	20	NC12S0400GET430
		Psi 5075	inch 2,24	1,00	5,77	2,46	-	0,56	2,97	1,93	7,09	4,13	1,85		UNF	0,25	0,24	1,97	0,55	0,79
GE2 G1 + QC PP 25 FEMALE	25	MPa 35	mm 65	29,5	182	66,5	-	14,35	83,5	55	180	113	55	1 5/16	6,25	6	50	14	25	NC12S0500GET530
		Psi 5075	inch 2,56	1,16	7,17	2,62	-	0,56	3,29	2,17	7,09	4,45	2,17		UNF	0,25	0,24	1,97	0,55	0,98


## GE2 PP



## GE2 DIN 2353 HEAVY SERIES

TYPE	DN	PN	A	B	C	D	d	E	F	G	H	I	A/QC	ØM	ØK*	W*	X*	SW	ØLW	ØRA	ITEM CODE
			mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	Carbon Steel
GE2 12S + QC PP 10 MALE	10	MPa 35	40	17,4	99	44,4	17,3	11	54,25	35	110	93	-	M20x1,5	5,25	4,5	34	9	10	12	NC11H0200GET230
		Psi 5075	57	1,57	0,69	3,90	1,75	0,68	0,43	2,14	1,38	4,33	3,66	-		0,21	0,18	1,34	0,35	0,39	0,47
GE2 12S + QC PP 10 FEMALE	10	MPa 35	40	17,4	110	44,4	-	11	54,25	35	110	93	32	M20x1,5	5,25	4,5	34	9	10	12	NC12H0200GET230
		Psi 5075	57	1,57	0,69	4,33	1,75	-	0,43	2,14	1,38	4,33	3,66	1,26		0,21	0,18	1,34	0,35	0,39	0,47
GE2 14S + QC PP 10 MALE	10	MPa 35	40	17,4	102,2	44,4	17,3	11	54,25	35	110	93	-	M22x1,5	5,25	4,5	34	9	10	14	NC11H0201GET230
		Psi 5075	57	1,57	0,69	4,02	1,75	0,68	0,43	2,14	1,38	4,33	3,66	-		0,21	0,18	1,34	0,35	0,39	0,55
GE2 14S + QC PP 10 FEMALE	10	MPa 35	40	17,4	113,2	44,4	-	11	54,25	35	110	93	32	M22x1,5	5,25	4,5	34	9	10	14	NC12H0201GET230
		Psi 5075	57	1,57	0,69	4,46	1,75	-	0,43	2,14	1,38	4,33	3,66	1,26		0,21	0,18	1,34	0,35	0,39	0,55
GE2 16S + QC PP 12,5 MALE	13	MPa 35	43	19,7	117,5	48,4	20,5	11	57	37	110	97	-	M24x1,5	5,25	5	36	9	13	16	NC11H0300GET330
		Psi 5075	57	1,69	0,78	4,63	1,91	0,81	0,43	2,24	1,46	4,33	3,82	-		0,21	0,20	1,42	0,35	0,51	0,63
GE2 16S + QC PP 12,5 FEMALE	13	MPa 35	43	19,7	124	48,4	-	11	57	37	110	97	38	M24x1,5	5,25	5	36	9	13	16	NC12H0300GET330
		Psi 5075	57	1,69	0,78	4,88	1,91	-	0,43	2,24	1,46	4,33	3,82	1,50		0,21	0,20	1,42	0,35	0,51	0,63
GE2 20S + QC PP 12,5 MALE	13	MPa 35	43	19,7	119,5	48,4	20,5	11	57	37	110	97	-	M30x2	5,25	5	36	9	13	20	NC11H0301GET330
		Psi 5075	57	1,69	0,78	4,70	1,91	0,81	0,43	2,24	1,46	4,33	3,82	-		0,21	0,20	1,42	0,35	0,51	0,79
GE2 20S + QC PP 12,5 FEMALE	13	MPa 35	43	19,7	126	48,4	-	11	57	37	110	97	38	M30x2	5,25	5	36	9	13	20	NC12H0301GET330
		Psi 5075	57	1,69	0,78	4,96	1,91	-	0,43	2,24	1,46	4,33	3,82	1,50		0,21	0,20	1,42	0,35	0,51	0,79
GE2 25S + QC PP 20 MALE	20	MPa 35	57	25,4	142,5	62,5	29	14	75,5	49	180	105	-	M36x2	6,25	6	50	14	20	25	NC11H0400GET430
		Psi 5075	57	2,24	1,00	5,61	2,46	1,14	0,55	2,97	1,93	7,09	4,13	-		0,25	0,24	1,97	0,55	0,79	0,98
GE2 25S + QC PP 20 FEMALE	20	MPa 35	57	25,4	154,5	62,5	-	14	75,5	49	180	105	47	M36x2	6,25	6	50	14	20	25	NC12H0400GET430
		Psi 5075	57	2,24	1,00	6,08	2,46	-	0,55	2,97	1,93	7,09	4,13	1,85		0,25	0,24	1,97	0,55	0,79	0,98
GE2 30S + QC PP 25 MALE	25	MPa 35	65	29,5	170,6	66,5	34,34	14	83,5	55	180	113	-	M42x2	6,25	6	50	14	25	30	NC11H0500GET530
		Psi 5075	57	2,56	1,16	6,72	2,62	1,35	0,55	3,29	2,17	7,09	4,45	-		0,25	0,24	1,97	0,55	0,98	1,18
GE2 30S + QC PP 25 FEMALE	25	MPa 35	65	29,5	186,1	66,5	-	14	83,5	55	180	113	55	M42x2	6,25	6	50	14	25	30	NC12H0500GET530
		Psi 5075	57	2,56	1,16	7,33	2,62	-	0,55	3,29	2,17	7,09	4,45	2,17		0,25	0,24	1,97	0,55	0,98	1,18
GE2 38S + QC PP 25 MALE	25	MPa 35	65	29,5	176	66,5	34,34	14	83,5	55	180	113	-	M52x2	6,25	6	50	14	25	38	NC11H0501GET530
		Psi 5075	57	2,56	1,16	6,93	2,62	1,35	0,55	3,29	2,17	7,09	4,45	-		0,25	0,24	1,97	0,55	0,98	1,50
GE2 38S + QC PP 25 FEMALE	25	MPa 35	65	29,5	191,5	66,5	-	14	83,5	55	180	113	55	M52x2	6,25	6	50	14	25	38	NC12H0501GET530
		Psi 5075	57	2,56	1,16	7,54	2,62	-	0,55	3,29	2,17	7,09	4,45	2,17		0,25	0,24	1,97	0,55	0,98	1,50

## GE2 PP






## GE2 DIN 2353 LIGHT SERIES

TYPE	DN	PN													CS Carbon Steel	ITEM CODE					
			A	B	C	D	d	E	F	G	H	I	A/QC	ØM	ØK*	W*	X*	SW	ØLW	ØRA	
GE2 10L + QC PP 10 MALE	10	MPa 35	mm 40	17,4	99,2	44,4	17,3	11	54,25	35	110	93	-	M16x1,5	5,25	4,5	34	9	8	10	NC11L0200GET230
		Psi 5075	inch 1,57	0,69	3,91	1,75	0,68	0,43	2,14	1,38	4,33	3,66	-		0,21	0,18	1,34	0,35	0,31	0,39	
GE2 10L + QC PP 10 FEMALE	10	MPa 35	mm 40	17,4	110,2	44,4	-	11	54,25	35	110	93	32	M16x1,5	5,25	4,5	34	9	8	10	NC12L0200GET230
		Psi 5075	inch 1,57	0,69	4,34	1,75	-	0,43	2,14	1,38	4,33	3,66	1,26		0,21	0,18	1,34	0,35	0,31	0,39	
GE2 12L + QC PP 10 MALE	10	MPa 35	mm 40	17,4	100,8	44,4	17,3	11	54,25	35	110	93	-	M18x1,5	5,25	4,5	34	9	10	12	NC11L0201GET230
		Psi 5075	inch 1,57	0,69	3,97	1,75	0,68	0,43	2,14	1,38	4,33	3,66	-		0,21	0,18	1,34	0,35	0,39	0,47	
GE2 12L + QC PP 10 FEMALE	10	MPa 35	mm 40	17,4	111,8	44,4	-	11	54,25	35	110	93	32	M18x1,5	5,25	4,5	34	9	10	12	NC12L0201GET230
		Psi 5075	inch 1,57	0,69	4,40	1,75	-	0,43	2,14	1,38	4,33	3,66	1,26		0,21	0,18	1,34	0,35	0,39	0,47	
GE2 15L + QC PP 12,5 MALE	13	MPa 35	mm 43	19,7	116,5	48,4	20,5	11	57	37	110	97	-	M22x1,5	5,25	5	36	9	13	15	NC11L0300GET330
		Psi 5075	inch 1,69	0,78	4,59	1,91	0,81	0,43	2,24	1,46	4,33	3,82	-		0,21	0,20	1,42	0,35	0,51	0,59	
GE2 15L + QC PP 12,5 FEMALE	13	MPa 35	mm 43	19,7	123	48,4	-	11	57	37	110	97	38	M22x1,5	5,25	5	36	9	13	15	NC12L0300GET330
		Psi 5075	inch 1,69	0,78	4,84	1,91	-	0,43	2,24	1,46	4,33	3,82	1,50		0,21	0,20	1,42	0,35	0,51	0,59	
GE2 18L + QC PP 12,5 MALE	13	MPa 35	mm 43	19,7	116,5	48,4	20,5	11	57	37	110	97	-	M26x1,5	5,25	5	36	9	13	18	NC11L0301GET330
		Psi 5075	inch 1,69	0,78	4,59	1,91	0,81	0,43	2,24	1,46	4,33	3,82	-		0,21	0,20	1,42	0,35	0,51	0,71	
GE2 18L + QC PP 12,5 FEMALE	13	MPa 35	mm 43	19,7	123	48,4	-	11	57	37	110	97	38	M26x1,5	5,25	5	36	9	13	18	NC12L0301GET330
		Psi 5075	inch 1,69	0,78	4,84	1,91	-	0,43	2,24	1,46	4,33	3,82	1,50		0,21	0,20	1,42	0,35	0,51	0,71	
GE2 22L + QC PP 20 MALE	20	MPa 35	mm 57	25,4	142	62,5	29,1	14	75,5	49	180	105	-	M30x2	6,25	6	50	14	20	22	NC11L0400GET430
		Psi 5075	inch 2,24	1,00	5,59	2,46	1,15	0,55	2,97	1,93	7,09	4,13	-		0,25	0,24	1,97	0,55	0,79	0,87	
GE2 22L + QC PP 20 FEMALE	20	MPa 35	mm 57	25,4	154	62,5	-	14	75,5	49	180	105	47	M30x2	6,25	6	50	14	20	22	NC12L0400GET430
		Psi 5075	inch 2,24	1,00	6,06	2,46	-	0,55	2,97	1,93	7,09	4,13	1,85		0,25	0,24	1,97	0,55	0,79	0,87	
GE2 28L + QC PP 25 MALE	25	MPa 35	mm 65	29,5	169	66,5	34,4	14	83,5	55	180	113	-	M36x2	6,25	6	50	14	25	28	NC11L0500GET530
		Psi 5075	inch 2,56	1,16	6,65	2,62	1,35	0,55	3,29	2,17	7,09	4,45	-		0,25	0,24	1,97	0,55	0,98	1,10	
GE2 28L + QC PP 25 FEMALE	25	MPa 35	mm 65	29,5	184,5	66,5	-	14	83,5	55	180	113	55	M36x2	6,25	6	50	14	25	28	NC12L0500GET530
		Psi 5075	inch 2,56	1,16	7,26	2,62	-	0,55	3,29	2,17	7,09	4,45	2,17		0,25	0,24	1,97	0,55	0,98	1,10	
GE2 35L + QC PP 25 MALE	25	MPa 35	mm 65	29,5	170	66,5	34,34	14	83,5	55	180	113	-	M45x2	6,25	6	50	14	25	35	NC11L0501GET530
		Psi 5075	inch 2,56	1,16	6,69	2,62	1,35	0,55	3,29	2,17	7,09	4,45	-		0,25	0,24	1,97	0,55	0,98	1,38	
GE2 35L + QC PP 25 FEMALE	25	MPa 35	mm 65	29,5	185,5	66,5	-	14	83,5	55	180	113	55	M45x2	6,25	6	50	14	25	35	NC12L0501GET530
		Psi 5075	inch 2,56	1,16	7,30	2,62	-	0,55	3,29	2,17	7,09	4,45	2,17		0,25	0,24	1,97	0,55	0,98	1,38	

## GE2 VGA

FIXING HOLES INCLUDED

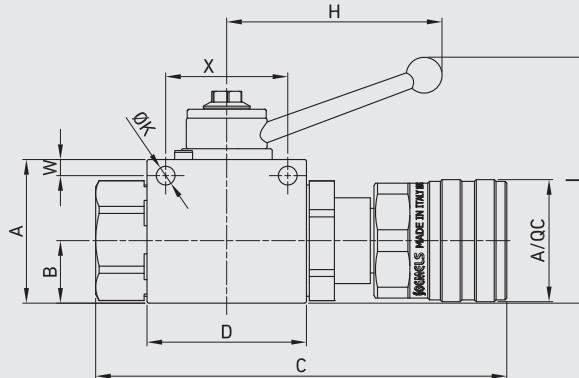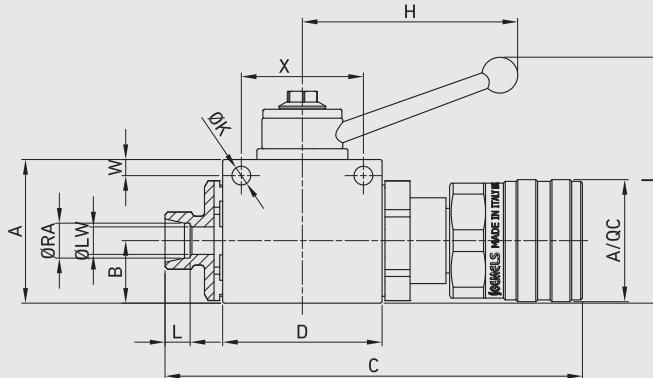


## GE2 DIN/ISO 228 BSP


CS

Carbon Steel

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	A/QC	ØM	ØK*	W*	X*	SW	ØLW	ITEM CODE
GE2 G3/8 + QC VGA 10 MALE	10	MPa 35	mm 40	17,4	114,5	44,4	11	54,25	35	110	93	34	G 3/8	5,25	4,5	34	9	10	NC15G0200GET230
		Psi 5075	inch 1,57	0,69	4,51	1,75	0,43	2,14	1,38	4,33	3,66	1,34		0,21	0,18	1,34	0,35	0,39	
GE2 G3/8 + QC VGA 10 FEMALE	10	MPa 35	mm 40	17,4	110	44,4	11	54,25	35	110	93	-	G 3/8	5,25	4,5	34	9	10	NC16G0200GET230
		Psi 5075	inch 1,57	0,69	4,33	1,75	0,43	2,14	1,38	4,33	3,66	-		0,21	0,18	1,34	0,35	0,39	
GE2 G1/2 + QC VGA 12,5 MALE	13	MPa 35	mm 43	19,7	127,3	48,4	11	57	37	110	97	43	G 1/2	5,25	5	36	9	13	NC15G0300GET330
		Psi 5075	inch 1,69	0,78	5,01	1,91	0,43	2,24	1,46	4,33	3,82	1,69		0,21	0,20	1,42	0,35	0,51	
GE2 G1/2 + QC VGA 12,5 FEMALE	13	MPa 35	mm 43	19,7	117	48,4	11	57	37	110	97	-	G 1/2	5,25	5	36	9	13	NC16G0300GET330
		Psi 5075	inch 1,69	0,78	4,61	1,91	0,43	2,24	1,46	4,33	3,82	-		0,21	0,20	1,42	0,35	0,51	
GE2 G3/4 + QC VGA 20 MALE	20	MPa 35	mm 57	25,4	146,5	62,5	14	75,5	49	180	105	48	G 3/4	6,25	6	50	14	20	NC15G0400GET430
		Psi 5075	inch 2,24	1,00	5,77	2,46	0,55	2,97	1,93	7,09	4,13	1,89		0,25	0,24	1,97	0,55	0,79	
GE2 G3/4 + QC VGA 20 FEMALE	20	MPa 35	mm 57	25,4	145,1	62,5	14	75,5	49	180	105	-	G 3/4	6,25	6	50	14	20	NC16G0400GET430
		Psi 5075	inch 2,24	1,00	5,71	2,46	0,55	2,97	1,93	7,09	4,13	-		0,25	0,24	1,97	0,55	0,79	
GE2 G1 + QC VGA 25 MALE	25	MPa 35	mm 65	29,5	178,5	66,5	14	83,5	55	180	113	57	G 1	6,25	6	50	14	25	NC15G0500GET530
		Psi 5075	inch 2,56	1,16	7,03	2,62	0,55	3,29	2,17	7,09	4,45	2,24		0,25	0,24	1,97	0,55	0,98	
GE2 G1 + QC VGA 25 FEMALE	25	MPa 35	mm 65	29,5	175	66,5	14	83,5	55	180	113	-	G 1	6,25	6	50	14	25	NC16G0500GET530
		Psi 5075	inch 2,56	1,16	6,89	2,62	0,55	3,29	2,17	7,09	4,45	-		0,25	0,24	1,97	0,55	0,98	

**GE2 VGA**

**GE2 ANSI/ASME B1.20.1 NPT**




TYPE	DN	PN		A	B	C	D	E	F	G	H	I	A/QC	ØM	ØK*	W*	X*	SW	ØLW	Carbon Steel	ITEM CODE
				MPa	mm	inch															
GE2 N3/8 + QC VGA 10 MALE	10	MPa 35	mm 40	17,4	114,5	44,4	11	54,25	35	110	93	34		N 3/8	5,25	4,5	34	9	10	Carbon Steel	NC15N0200GET230
		Psi 5075	inch 1,57	0,69	4,51	1,75	0,43	2,14	1,38	4,33	3,66	1,34			0,21	0,18	1,34	0,35	0,39		
GE2 N3/8 + QC VGA 10 FEMALE	10	MPa 35	mm 40	17,4	110	44,4	11	54,25	35	110	93	-		N 3/8	5,25	4,5	34	9	10	Carbon Steel	NC16N0200GET230
		Psi 5075	inch 1,57	0,69	4,33	1,75	0,43	2,14	1,38	4,33	3,66	-			0,21	0,18	1,34	0,35	0,39		
GE2 N1/2 + QC VGA 12,5 MALE	13	MPa 35	mm 43	19,7	127,3	48,4	11	57	37	110	97	43		N 1/2	5,25	5	36	9	13	Carbon Steel	NC15N0300GET330
		Psi 5075	inch 1,69	0,78	5,01	1,91	0,43	2,24	1,46	4,33	3,82	1,69			0,21	0,20	1,42	0,35	0,51		
GE2 N1/2 + QC VGA 12,5 FEMALE	13	MPa 35	mm 43	19,7	117	48,4	11	57	37	110	97	-		N 1/2	5,25	5	36	9	13	Carbon Steel	NC16N0300GET330
		Psi 5075	inch 1,69	0,78	4,61	1,91	0,43	2,24	1,46	4,33	3,82	-			0,21	0,20	1,42	0,35	0,51		
GE2 N3/4 + QC VGA 20 MALE	20	MPa 35	mm 57	25,4	146,5	62,5	14	75,5	49	180	105	48		N 3/4	6,25	6	50	14	20	Carbon Steel	NC15N0400GET430
		Psi 5075	inch 2,24	1,00	5,77	2,46	0,55	2,97	1,93	7,09	4,13	1,89			0,25	0,24	1,97	0,55	0,79		
GE2 N3/4 + QC VGA 20 FEMALE	20	MPa 35	mm 57	25,4	145,1	62,5	14	75,5	49	180	105	-		N 3/4	6,25	6	50	14	20	Carbon Steel	NC16N0400GET430
		Psi 5075	inch 2,24	1,00	5,71	2,46	0,55	2,97	1,93	7,09	4,13	-			0,25	0,24	1,97	0,55	0,79		
GE2 N1 + QC VGA 25 MALE	25	MPa 35	mm 65	29,5	178,5	66,5	14	83,5	55	180	113	57		N 1	6,25	6	50	14	25	Carbon Steel	NC15N0500GET530
		Psi 5075	inch 2,56	1,16	7,03	2,62	0,55	3,29	2,17	7,09	4,45	-			0,25	0,24	1,97	0,55	0,98		
GE2 N1 + QC VGA 25 FEMALE	25	MPa 35	mm 65	29,5	175	66,5	14	83,5	55	180	113	-		N 1	6,25	6	50	14	25	Carbon Steel	NC16N0500GET530
		Psi 5075	inch 2,56	1,16	6,89	2,62	0,56	3,29	2,17	7,09	4,45	-			0,25	0,24	1,97	0,55	0,98		


**GE2 SAE J1926-1**

TYPE	DN	PN		A	B	C	D	E	F	G	H	I	A/QC	ØM	ØK*	W*	X*	SW	ØLW	Carbon Steel	ITEM CODE
				MPa	mm	inch															
GE2 SAE6 + QC VGA 10 MALE	10	MPa 35	mm 40	17,5	114,5	44,4	11,1	54,25	35	110	93	34		9/16	5,25	4,5	34	9	10	Carbon Steel	NC15S0200GET230
		Psi 5075	inch 1,57	0,69	4,51	1,75	0,44	2,14	1,38	4,33	3,66	1,34			UNF	0,21	0,18	1,34	0,35	0,39	
GE2 SAE6 + QC VGA 10 FEMALE	10	MPa 35	mm 40	17,5	110	44,4	11,1	54,25	35	110	93	-		9/16	5,25	4,5	34	9	10	Carbon Steel	NC16S0200GET230
		Psi 5075	inch 1,57	0,69	4,33	1,75	0,44	2,14	1,38	4,33	3,66	-			UNF	0,21	0,18	1,34	0,35	0,39	
GE2 SAE8 + QC VGA 12,5 MALE	13	MPa 35	mm 43	19,7	127,3	48,4	11,1	57,25	37	110	97	43		3/4	5,25	5	36	9	13	Carbon Steel	NC15S0300GET330
		Psi 5075	inch 1,69	0,78	5,01	1,91	0,44	2,25	1,46	4,33	3,82	1,69			UNF	0,21	0,20	1,42	0,35	0,51	
GE2 SAE8 + QC VGA 12,5 FEMALE	13	MPa 35	mm 43	19,7	117	48,4	11,1	57,25	37	110	97	-		3/4	5,25	5	36	9	13	Carbon Steel	NC16S0300GET330
		Psi 5075	inch 1,69	0,78	4,61	1,91	0,44	2,25	1,46	4,33	3,82	-			UNF	0,21	0,20	1,42	0,35	0,51	
GE2 SAE12 + QC VGA 20 MALE	20	MPa 35	mm 57	25,4	146,5	62,5	14,35	75,5	49	180	105	48		1 1/16	6,25	6	50	14	20	Carbon Steel	NC15S0400GET430
		Psi 5075	inch 2,24	1,00	5,77	2,46	0,56	2,97	1,93	7,09	4,13	1,89			UNF	0,25	0,24	1,97	0,55	0,79	
GE2 SAE12 + QC VGA 20 FEMALE	20	MPa 35	mm 57	25,4	145,1	62,5	14,35	75,5	49	180	105	-		1 1/16	6,25	6	50	14	20	Carbon Steel	NC16S0400GET430
		Psi 5075	inch 2,24	1,00	5,71	2,46	0,56	2,97	1,93	7,09	4,13	-			UNF	0,25	0,24	1,97	0,55	0,79	
GE2 G1 + QC VGA 25 MALE	25	MPa 35	mm 65	29,5	178,5	66,5	14,35	83,5	55	180	113	57		1 5/16	6,25	6	50	14	25	Carbon Steel	NC15S0500GET530
		Psi 5075	inch 2,56	1,16	7,03	2,62	0,56	3,29	2,17	7,09	4,45	2,24			UNF	0,25	0,24	1,97	0,55	0,98	
GE2 G1 + QC VGA 25 FEMALE	25	MPa 35	mm 65	29,5	175	66,5	14,35	83,5	55	180	113	-		1 5/16	6,25	6	50	14	25	Carbon Steel	NC16S0500GET530
		Psi 5075	inch 2,56	1,16	6,89	2,62	0,56	3,29	2,17	7,09	4,45	-			UNF	0,25	0,24	1,97	0,55	0,98	

## GE2 VGA

FIXING HOLES INCLUDED

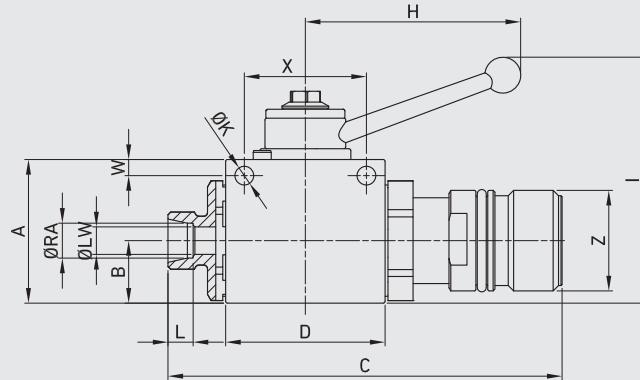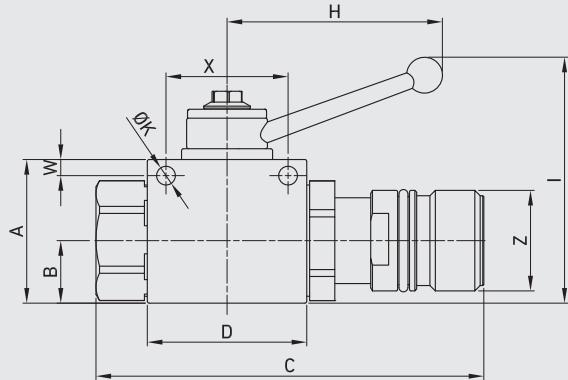


## GE2 DIN 2353 HEAVY SERIES

CS

Carbon Steel

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	A/QC	ØM	ØK*	W*	X*	SW	ØLW	ØRA	ITEM CODE
GE2 12S + QC VGA 10 MALE	10	MPa 35 Psi 5075	mm 40 inch 1,57	17,4 0,69	116 4,57	44,4 1,75	11 0,43	54,25 2,14	35 1,38	110 4,33	93 3,66	34 1,34	M20x1,5	5,25 0,21	4,5 0,18	34 1,34	9 0,35	10 0,39	12 0,47	NC15H0200GET230
GE2 12S + QC VGA 10 FEMALE	10	MPa 35 Psi 5075	mm 40 inch 1,57	17,4 0,69	109,5 4,31	44,4 1,75	11 0,43	54,25 2,14	35 1,38	110 4,33	93 3,66	-	M20x1,5	5,25 0,21	4,5 0,18	34 1,34	9 0,35	10 0,39	12 0,47	NC16H0200GET230
GE2 14S + QC VGA 10 MALE	10	MPa 35 Psi 5075	mm 40 inch 1,57	17,4 0,69	119,2 4,69	44,4 1,75	11 0,43	54,25 2,14	35 1,38	110 4,33	93 3,66	34 1,34	M22x1,5	5,25 0,21	4,5 0,18	34 1,34	9 0,35	10 0,39	14 0,55	NC15H0201GET230
GE2 14S + QC VGA 10 FEMALE	10	MPa 35 Psi 5075	mm 40 inch 1,57	17,4 0,69	112,7 4,44	44,4 1,75	11 0,43	54,25 2,14	35 1,38	110 4,33	93 3,66	-	M22x1,5	5,25 0,21	4,5 0,18	34 1,34	9 0,35	10 0,39	14 0,55	NC16H0201GET230
GE2 16S + QC VGA 12,5 MALE	13	MPa 35 Psi 5075	mm 43 inch 1,69	19,7 0,78	130,3 5,13	48,4 1,91	11 0,43	57 2,24	37 1,46	110 4,33	97 3,82	43 1,69	M24x1,5	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	16 0,63	NC15H0300GET330
GE2 16S + QC VGA 12,5 FEMALE	13	MPa 35 Psi 5075	mm 43 inch 1,69	19,7 0,78	120 4,72	48,4 1,91	11 0,43	57 2,24	37 1,46	110 4,33	97 3,82	-	M24x1,5	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	16 0,63	NC16H0300GET330
GE2 20S + QC VGA 12,5 MALE	13	MPa 35 Psi 5075	mm 43 inch 1,69	19,7 0,78	132 5,20	48,4 1,91	11 0,43	57 2,24	37 1,46	110 4,33	97 3,82	43 1,69	M30x2	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	20 0,79	NC15H0301GET330
GE2 20S + QC VGA 12,5 FEMALE	13	MPa 35 Psi 5075	mm 43 inch 1,69	19,7 0,78	122 4,80	48,4 1,91	11 0,43	57 2,24	37 1,46	110 4,33	97 3,82	-	M30x2	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	20 0,79	NC16H0301GET330
GE2 25S + QC VGA 20 MALE	20	MPa 35 Psi 5075	mm 57 inch 2,24	25,4 1,00	154 6,06	62,5 2,46	14 0,55	75,5 2,97	49 1,93	180 7,09	105 4,13	48 1,89	M36x2	6,25 0,25	6 0,24	50 1,97	14 0,55	20 0,79	25 0,98	NC15H0400GET430
GE2 25S + QC VGA 20 FEMALE	20	MPa 35 Psi 5075	mm 57 inch 2,24	25,4 1,00	153,1 6,03	62,5 2,46	14 0,55	75,5 2,97	49 1,93	180 7,09	105 4,13	-	M36x2	6,25 0,25	6 0,24	50 1,97	14 0,55	20 0,79	25 0,98	NC16H0400GET430
GE2 30S + QC VGA 25 MALE	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5 1,16	182,6 7,19	66,5 2,62	14 0,55	83,5 3,29	55 2,17	180 7,09	113 4,45	57 2,24	M42x2	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	30 1,18	NC15H0500GET530
GE2 30S + QC VGA 25 FEMALE	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5 1,16	179,1 7,05	66,5 2,62	14 0,55	83,5 3,29	55 2,17	180 7,09	113 4,45	-	M42x2	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	30 1,18	NC16H0500GET530
GE2 38S + QC VGA 25 MALE	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5 1,16	188 7,40	66,5 2,62	14 0,55	83,5 3,29	55 2,17	180 7,09	113 4,45	57 2,24	M52x2	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	38 1,50	NC15H0501GET530
GE2 38S + QC VGA 25 FEMALE	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5 1,16	184,5 7,26	66,5 2,62	14 0,55	83,5 3,29	55 2,17	180 7,09	113 4,45	-	M52x2	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	38 1,50	NC16H0501GET530

## GE2 VGA



## GE2 DIN 2353 LIGHT SERIES

TYPE	DN	PN														CS Carbon Steel	ITEM CODE			
			A	B	C	D	E	F	G	H	I	A/QC	ØM	ØK*	W*	X*	SW	ØLW	ØRA	
GE2 10L + QC VGA 10 MALE	10	MPa 35 Psi 5075	mm 40 inch 1,57	17,4 0,69	116,2 4,57	44,4 1,75	11 0,43	54,25 2,14	35 1,38	110 4,33	93 3,66	34 1,34	M16x1,5	5,25 0,21	4,5 0,18	34 1,34	9 0,35	8 0,31	10 0,39	NC15L0200GET230
GE2 10L + QC VGA 10 FEMALE	10	MPa 35 Psi 5075	mm 40 inch 1,57	17,4 0,69	109,7 4,32	44,4 1,75	11 0,43	54,25 2,14	35 1,38	110 4,33	93 3,66	- -	M16x1,5	5,25 0,21	4,5 0,18	34 1,34	9 0,35	8 0,31	10 0,39	NC16L0200GET230
GE2 12L + QC VGA 10 MALE	10	MPa 35 Psi 5075	mm 40 inch 1,57	17,4 0,69	117,8 4,64	44,4 1,75	11 0,43	54,25 2,14	35 1,38	110 4,33	93 3,66	34 1,34	M18x1,5	5,25 0,21	4,5 0,18	34 1,34	9 0,35	10 0,39	12 0,47	NC15L0201GET230
GE2 12L + QC VGA 10 FEMALE	10	MPa 35 Psi 5075	mm 40 inch 1,57	17,4 0,69	111,3 4,38	44,4 1,75	11 0,43	54,25 2,14	35 1,38	110 4,33	93 3,66	- -	M18x1,5	5,25 0,21	4,5 0,18	34 1,34	9 0,35	10 0,39	12 0,47	NC16L0201GET230
GE2 15L + QC VGA 12,5 MALE	13	MPa 35 Psi 5075	mm 43 inch 1,69	19,7 0,78	129,3 5,09	48,4 1,91	11 0,43	57 2,24	37 1,46	110 4,33	97 3,82	43 1,69	M22x1,5	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	15 0,59	NC15L0300GET330
GE2 15L + QC VGA 12,5 FEMALE	13	MPa 35 Psi 5075	mm 43 inch 1,69	19,7 0,78	119 4,69	48,4 1,91	11 0,43	57 2,24	37 1,46	110 4,33	97 3,82	- -	M22x1,5	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	15 0,59	NC16L0300GET330
GE2 18L + QC VGA 12,5 MALE	13	MPa 35 Psi 5075	mm 43 inch 1,69	19,7 0,78	129,3 5,09	48,4 1,91	11 0,43	57 2,24	37 1,46	110 4,33	97 3,82	43 1,69	M26x1,5	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	18 0,71	NC15L0301GET330
GE2 18L + QC VGA 12,5 FEMALE	13	MPa 35 Psi 5075	mm 43 inch 1,69	19,7 0,78	119 4,69	48,4 1,91	11 0,43	57 2,24	37 1,46	110 4,33	97 3,82	- -	M26x1,5	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	18 0,71	NC16L0301GET330
GE2 22L + QC VGA 20 MALE	20	MPa 35 Psi 5075	mm 57 inch 2,24	25,4 1,00	153,5 6,04	62,5 2,46	14 0,55	75,5 2,97	49 1,93	180 7,09	105 4,13	48 1,89	M30x2	6,25 0,25	6 0,24	50 1,97	14 0,55	20 0,79	22 0,87	NC15L0400GET430
GE2 22L + QC VGA 20 FEMALE	20	MPa 35 Psi 5075	mm 57 inch 2,24	25,4 1,00	152,6 6,01	62,5 2,46	14 0,55	75,5 2,97	49 1,93	180 7,09	105 4,13	- -	M30x2	6,25 0,25	6 0,24	50 1,97	14 0,55	20 0,79	22 0,87	NC16L0400GET430
GE2 28L + QC VGA 25 MALE	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5 1,16	181 7,13	66,5 2,62	14 0,55	83,5 3,29	55 2,17	180 7,09	113 4,45	57 2,24	M36x2	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	28 1,10	NC15L0500GET530
GE2 28L + QC VGA 25 FEMALE	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5 1,16	177,5 6,99	66,5 2,62	14 0,55	83,5 3,29	55 2,17	180 7,09	113 4,45	- -	M36x2	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	28 1,10	NC16L0500GET530
GE2 35L + QC VGA 25 MALE	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5 1,16	182 7,17	66,5 2,62	14 0,55	83,5 3,29	55 2,17	180 7,09	113 4,45	57 2,24	M45x2	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	35 1,38	NC15L0501GET530
GE2 35L + QC VGA 25 FEMALE	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5 1,16	178,5 7,03	66,5 2,62	14 0,55	83,5 3,29	55 2,17	180 7,09	113 4,45	- -	M45x2	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	35 1,38	NC16L0501GET530





# HYDRAULIC

## HIGH PRESSURE VALVES FOR HYDRAULIC FIELD

For hydraulic/industrial field, since 50 years **GEMELS** produces high pressure ball valves, known all over the world as synonym of maximum reliability and high quality. **GEMELS** is one of the World Leader Manufacturer.

Thanks to a full package that includes a wide variety of models and to special and customized solutions, our clients and distributors use our valves for different application, like: agriculture, automotive, naval, firefighting, CNG.




# CUSTOMIZED LEAN SOLUTION

Edition. 21.0



## LEAN CUSTOMIZED SOLUTIONS

**GEMELS** studies and designs special lean customized solutions for our customers based on the specific requests. Thanks to the close collaboration between **GEMELS** technical department and the engineering department of our customers, we are able to study the best and most suitable solution for the application where our products will be mounted. **GEMELS** can realize prototypes and samples. Our customized solutions can range over different fields, like agriculture, fire-fighting, construction and building, lifting, automotive, steel plant, heavy equipment and marine.

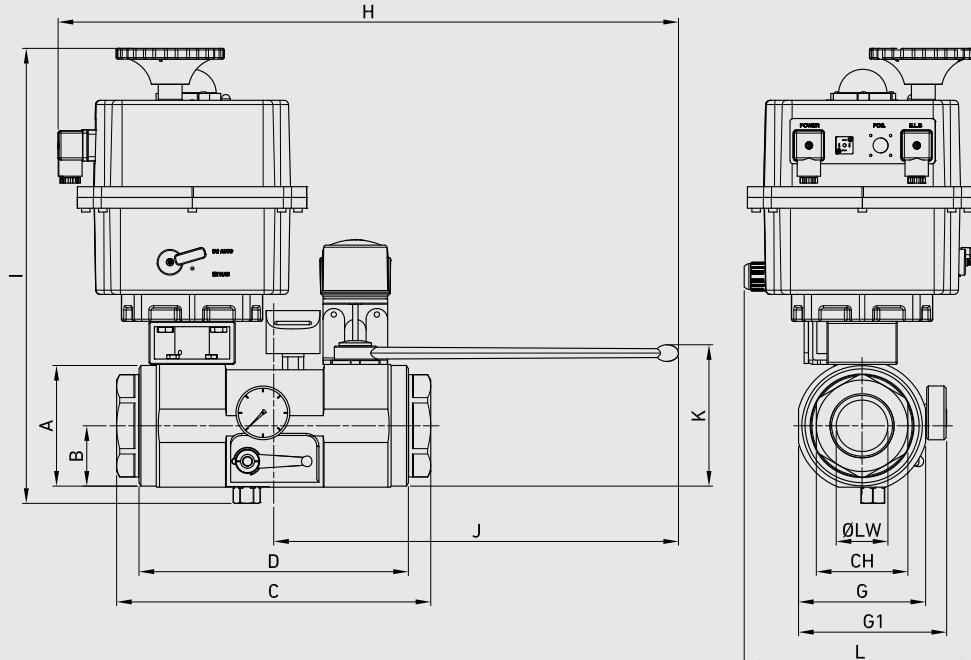


## ■ FOR FIRE FIGHTING

TYPE / ITEM CODE	DN	A	B	C	D	G	G1	H	I	J	K	L	CH	ØLW	
GB2 S6 1 1/2	4	mm inch	112 4,41	56 2,20	292 11,50	250 9,84	118 4,65	137,5 5,41	576 22,68	422 16,61	376 14,80	131 5,16	216 8,50	85 1,89	48



## CUSTOMIZED

## HYDRAULIC VALVES

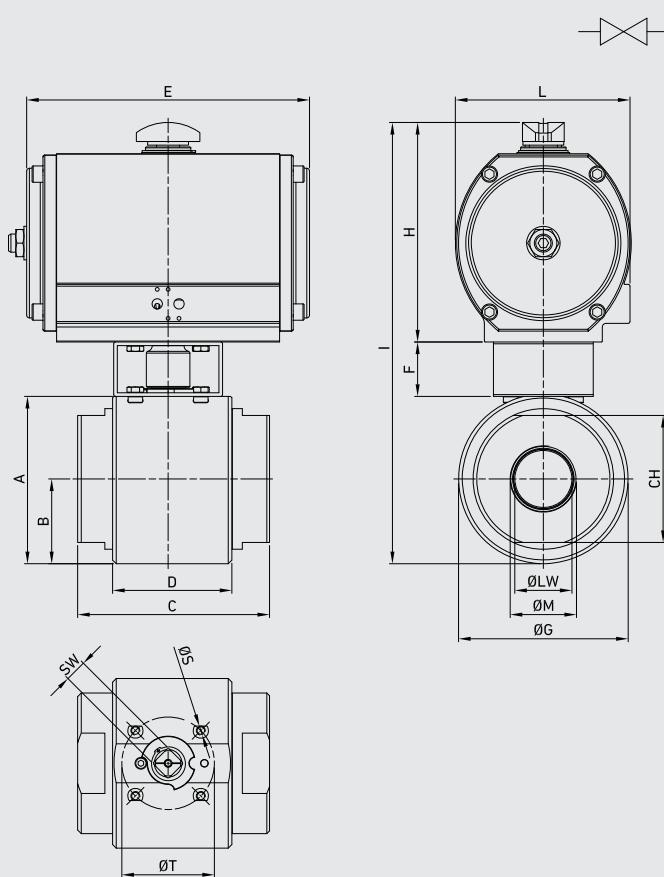

## FOR FIRE FIGHTING

TYPE / ITEM CODE	DN	A	B	C	D	E	F	ØG	H	I	L	ØM	CH	ØS	ØT	ISO 5211	SW	ØLW
GHP G 1/2	13	mm 53	27,5	119	79	150	40	55	96	190	70	G 1/2	38	M5	36	F03	9	13
		inch 2,09	1,08	4,69	3,11	5,91	1,57	2,17	3,78	7,48	2,76				1,42		0,35	0,51
GHP G 3/4	20	mm 70	38,5	149	99	206	40	77	143	253	112,5	G 3/4	55	M6	50	F05	14	20
		inch 2,76	1,52	5,87	3,90	8,11	1,57	3,03	5,63	9,96	4,43				1,97		0,55	0,79
GHP G 1	20	mm 80,5	45	168	105	206	40	90	143	263	112,5	G 1	60	M6	50	F05	14	25
		inch 3,17	1,77	6,61	4,13	8,11	1,57	3,54	5,63	10,35	4,43				1,97		0,55	0,98
GHP G 1 1/4	20	mm 95	48,5	156	106	218	40	97	165	300	137	G 1 1/4	70	M6	50	F05	17	32
		inch 3,74	1,91	6,14	4,17	8,58	1,57	3,82	6,50	11,81	5,39				1,97		0,67	1,26
GHP G 1 1/2	20	mm 111,5	58	166,5	110,5	218	40	116	165	317	137	G 1 1/2	75	M6	50	F05	17	40
		inch 4,39	2,28	6,56	4,35	8,58	1,57	4,57	6,50	12,48	5,39				1,97		0,67	1,57
GHP G 2	20	mm 118,5	61,5	175	115	266	40	123	200	359	158	G 2	85	M6	50	F05	17	49
		inch 4,67	2,42	6,89	4,53	10,47	1,57	4,84	7,87	14,13	6,22				1,97		0,67	1,93
GHP G 2 1/2	20	mm 184,5	93,5	211,5	131,5	266	60	187	200	425	158	G 2 1/2	140	M10	102	F10	24	63
		inch 7,26	3,68	8,33	5,18	10,47	2,36	7,36	7,87	16,73	6,22				4,02		0,94	2,48
GHP G 3	20	mm 200	102	239	162,5	358	60	204	248	508	198	G 3	140	M10	102	F10	24	74
		inch 7,87	4,02	9,41	6,40	14,09	2,36	8,03	9,76	20,00	7,80				4,02		0,94	2,91
GHP G 4	100	mm 236	120	295,5	219	358	60	240	248	544	198	G 4	170	M10	102	F10	24	95
		inch 9,29	4,72	11,63	8,62	14,09	2,36	9,45	9,76	21,42	7,80				4,02		0,94	3,74

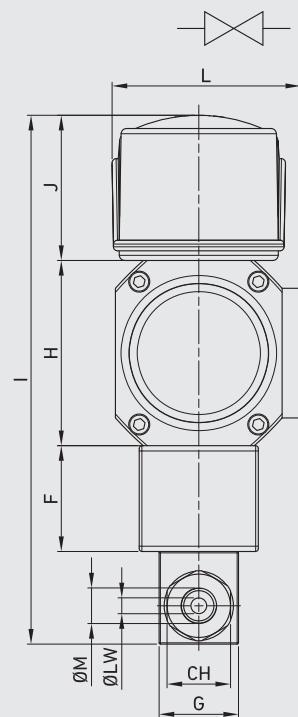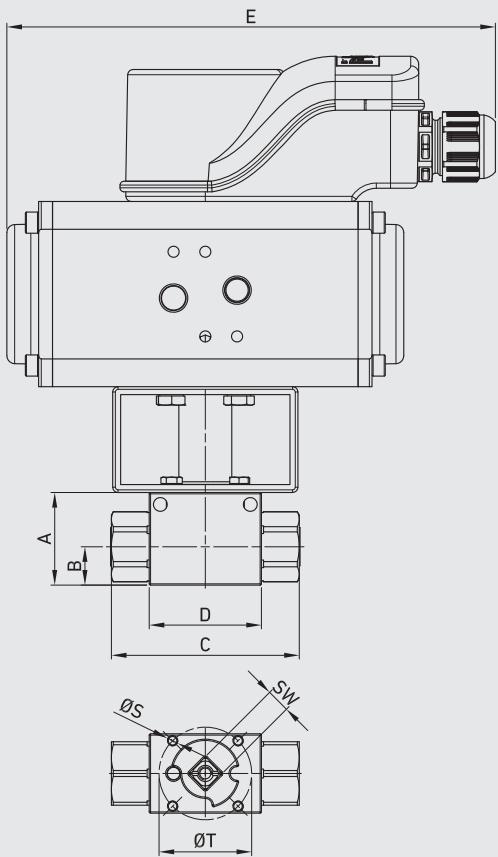


## FOR FIRE FIGHTING

TYPE / ITEM CODE	DN	A	B	C	D	E	F	G	H	I	J	L	ØM	CH	ØS	ØT	ISO 5211	SW	ØLW	
GE2 G 1/8	4	mm	35	14,5	71	42,4	185	40	30	70	200	55	72	G 1/8	24	M4	35	F03	9	4
		inch	1,38	0,57	2,80	1,67	7,28	1,57	1,18	2,76	7,87	2,17	2,83				1,38		0,35	0,16
GE2 G 1/4	6	mm	35	14,5	71	42,4	185	40	30	70	200	55	72	G 1/4	24	M4	35	F03	9	6
		inch	1,38	0,57	2,80	1,67	7,28	1,57	1,18	2,76	7,87	2,17	2,83				1,38		0,35	0,24
GE2 G 3/8	10	mm	40	17,4	73	44,4	185	40	35	70	205	55	72	G 3/8	30	M5	36	F03	9	10
		inch	1,57	0,69	2,87	1,75	7,28	1,57	1,38	2,76	8,07	2,17	2,83				1,42		0,35	0,39
GE2 G 1/2	13	mm	43	19,65	83	48,4	185	40	37	70	208	55	72	G 1/2	32	M5	36	F03	9	13
		inch	1,69	0,77	3,27	1,91	7,28	1,57	1,46	2,76	8,19	2,17	2,83				1,42		0,35	0,51
GE2 G 3/4	20	mm	57	25,4	95	62,5	213	40	49	118	270	55	113	G 3/4	41	M6	50	F05	14	20
		inch	2,24	1,00	3,74	2,46	8,39	1,57	1,93	4,65	10,63	2,17	4,45				1,97		0,55	0,79
GE2 G 1	25	mm	65	29,5	112,4	66,5	213	40	55	118	278	55	113	G 1	50	M6	50	F05	14	25
		inch	2,56	1,16	4,43	2,62	8,39	1,57	2,17	4,65	10,94	2,17	4,45				1,97		0,55	0,98
GE2 G 1 1/4 R	25	mm	65	29,5	120,4	66,5	213	40	55	118	278	55	113	G 1 1/4	55	M6	50	F05	14	25
		inch	2,56	1,16	4,74	2,62	8,39	1,57	2,17	4,65	10,94	2,17	4,45				1,97		0,55	0,98
GE2 G 1 1/2 R	25	mm	65	29,5	124,4	66,5	213	40	55	118	278	55	113	G 1 1/2	60	M6	50	F05	14	25
		inch	2,56	1,16	4,90	2,62	8,39	1,57	2,17	4,65	10,94	2,17	4,45				1,97		0,55	0,98


## CUSTOMIZED

## HYDRAULIC VALVES

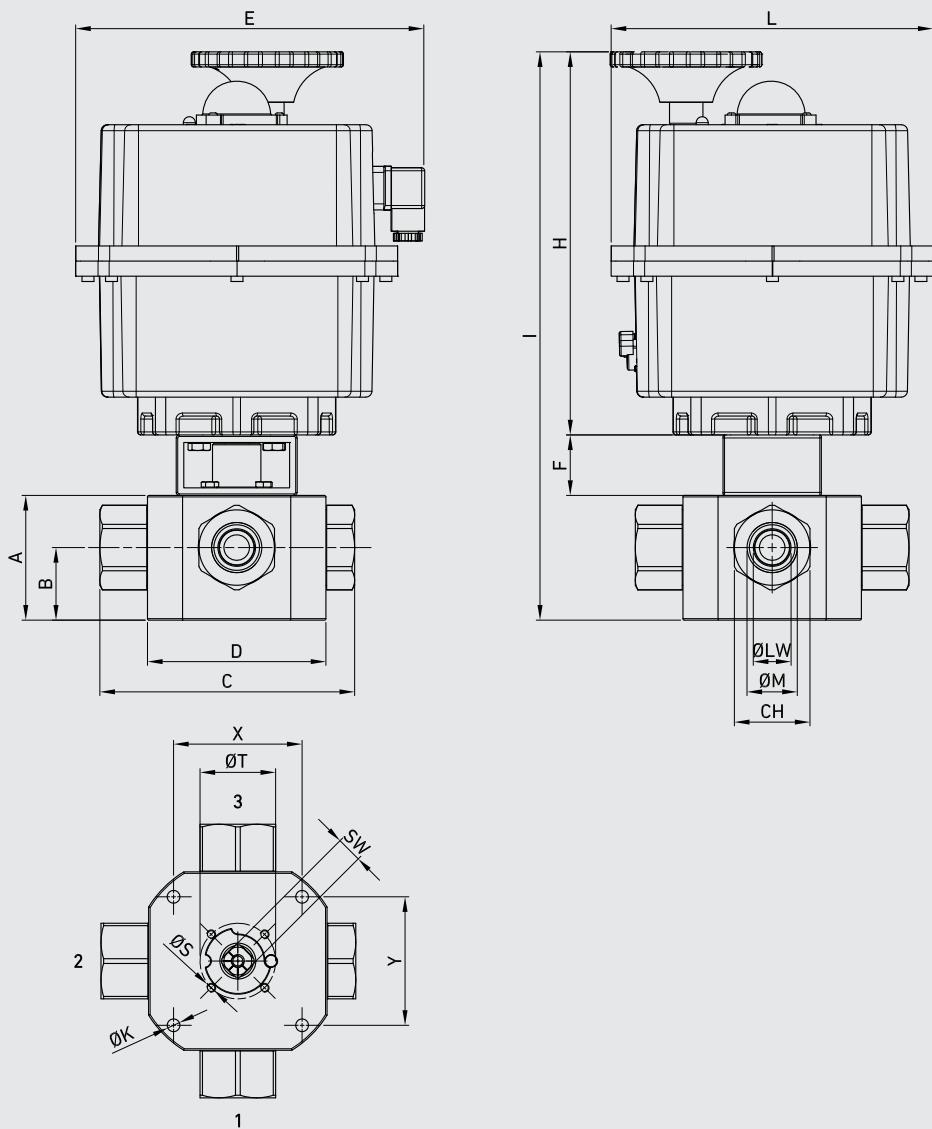


## FOR AUTOMOTIVE

TYPE / ITEM CODE	DN	A	B	C	D	E	F	H	I	L	CH	ØK	ØT	ØS	X	Y	SW	ØM	ØLW
GEX G 2	25	mm 82,5 inch 3,25	48 1,89	169 6,65	118 4,65	230 9,06	40 1,57	253 9,96	376 14,80	218 8,58	50 0,33	8,5 1,97	M6 1,97	85 3,35	85 3,35	17 0,67	G 1 0,98	25	

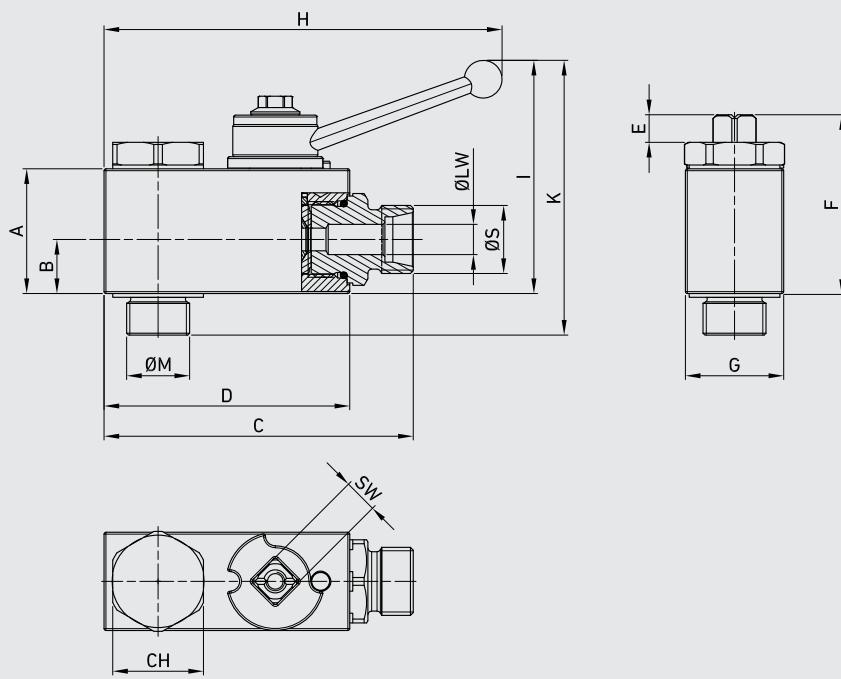


## FOR AGRICULTURAL

TYPE / ITEM CODE	DN	A	B	C	D	E	F	G	H	I	SW	CH	ØLW	K	ØM	ØS
GE1 EXTENDED 1/4	6	mm inch	33 1,30	14,3 0,56	81,8 3,22	65 2,56	7,3 0,29	47,55 1,87	26 1,02	105 4,13	62 2,44	9 0,35	24 0,24	6 0,24	73 2,87	G 3/8 M18x1,5

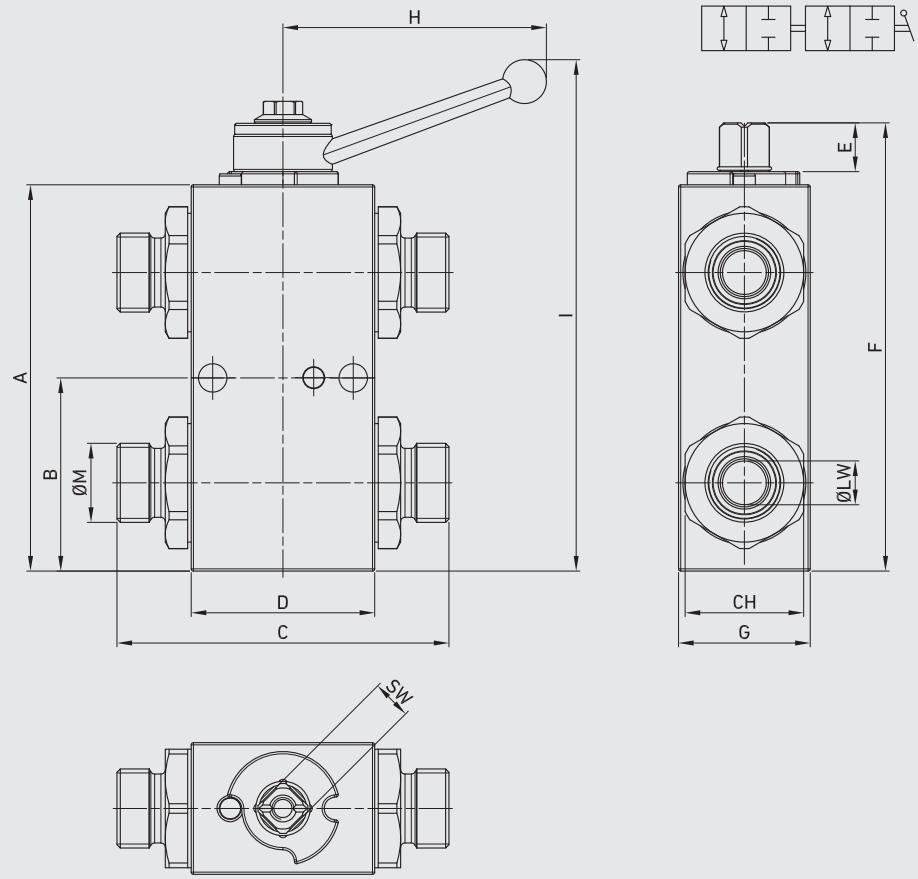

## FOR AGRICULTURAL

TYPE / ITEM CODE	DN	A	B	C	D	E	F	G	H	I	Ø M	CH	SW	ØLW	
GE1 TANDEM DIN12L	10	mm	88	44	75,6	41,8	11,1	102	30	60	116	M18x1,5	27	9	10
		inch	3,46	1,73	2,98	1,65	0,44	4,02	1,18	2,36	4,57			0,35	0,39
GE1 TANDEM G3/8	10	mm	88	44	71	41,8	11,1	102	30	104	130	G3/8	27	9	10
		inch	3,46	1,73	2,80	1,65	0,44	4,02	1,18	4,09	5,12			0,35	0,39
GE1 TANDEM DIN15L	13	mm	88	44	83	44,4	11,1	102	35	110	131	M22x1,5	30	9	13
		inch	3,46	1,73	3,27	1,75	0,44	4,02	1,38	4,33	5,16			0,35	0,51
GE1 TANDEM G1/2	13	mm	88	44	83	44,4	11,1	102	35	110	131	G1/2	30	9	12
		inch	3,46	1,73	3,27	1,75	0,44	4,02	1,38	4,33	5,16			0,35	0,47



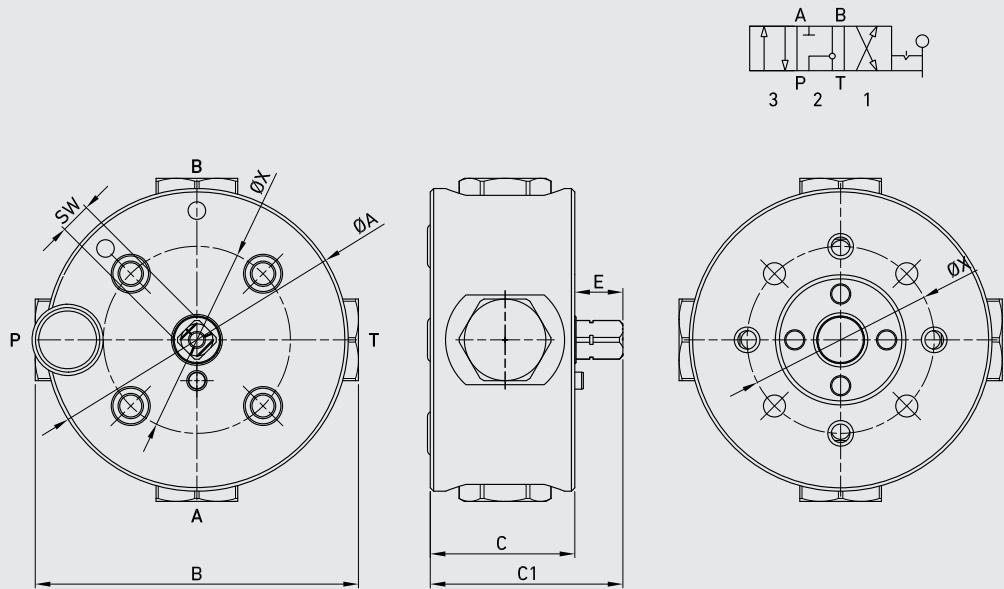


## FOR AGRICULTURAL

TYPE / ITEM CODE	DN	ØA	B	C	C1	E	ØX	SW	
GP4K 1/4	6	mm inch	89 3,50	95 3,74	42,5 1,67	57 2,24	14 0,55	55 2,17	9 0,35


## CUSTOMIZED

## HYDRAULIC VALVES

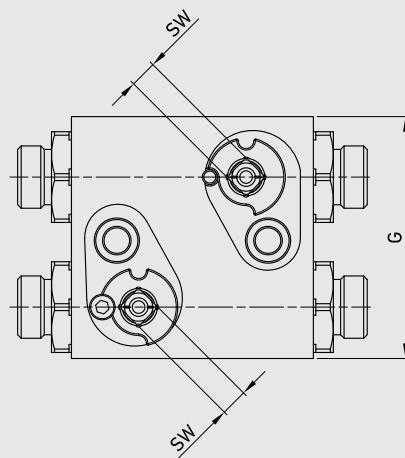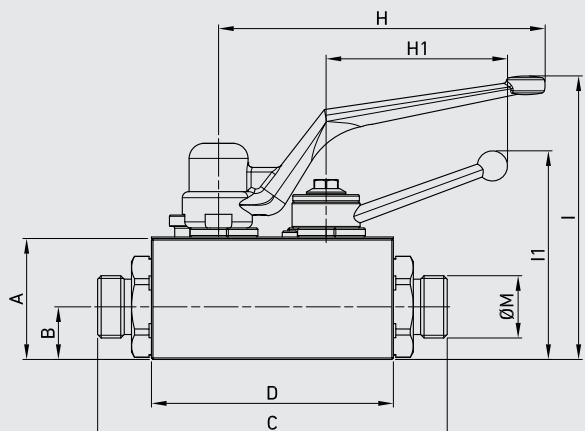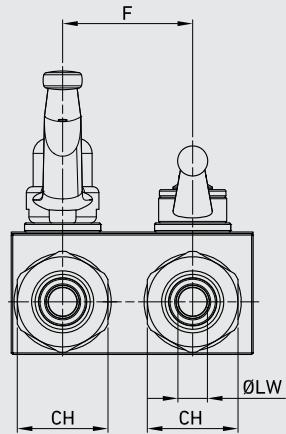



## FOR AGRICULTURAL

TYPE / ITEM CODE	A	B	C	D	F	G	H	H1	I	I1	ØM	ØLW	CH	SW
GT 3/8	mm 40	17,4	115,6	80	43	80	180	60	94	69	M15x1,5	10	30	9
	inch 1,57	0,69	4,55	3,15	1,69	3,15	7,09	2,36	3,70	2,72		0,39		0,35

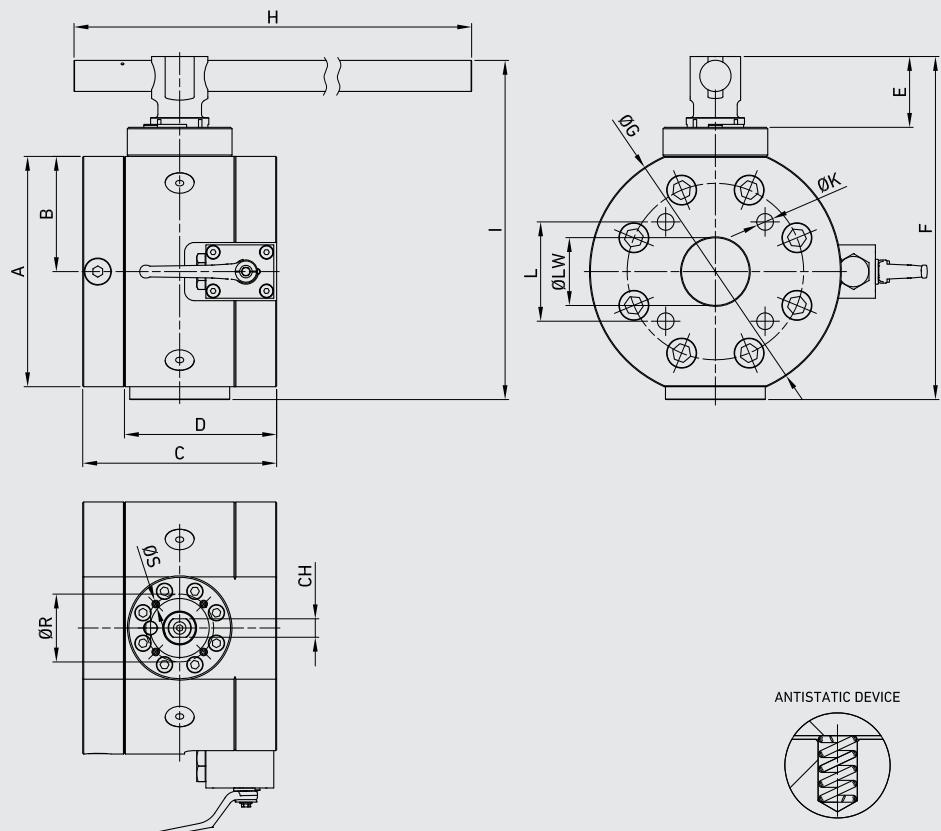


## FOR STEEL PLANT

TYPE / ITEM CODE	DN	A	B	C	D	E	F	ØG	H	I	L	ØK	ØT	ØS	ISO5211	CH	ØLW	
GRY 3"	74	mm	238	119	200	157	73	354	260	650	350	102,5	4xM20	70	M8	F07	19	74
		inch	9,37	4,69	7,87	6,18	2,87	13,94	10,24	25,59	13,78	4,04		2,76				2,91
GRY 4"	100	mm	300	150	280	223,5	77	412	300	650	400	113,2	4xM24	102	M10	F10	24	100
		inch	11,81	5,91	11,02	8,80	3,03	16,22	11,81	25,59	15,75	4,46		4,02				3,94

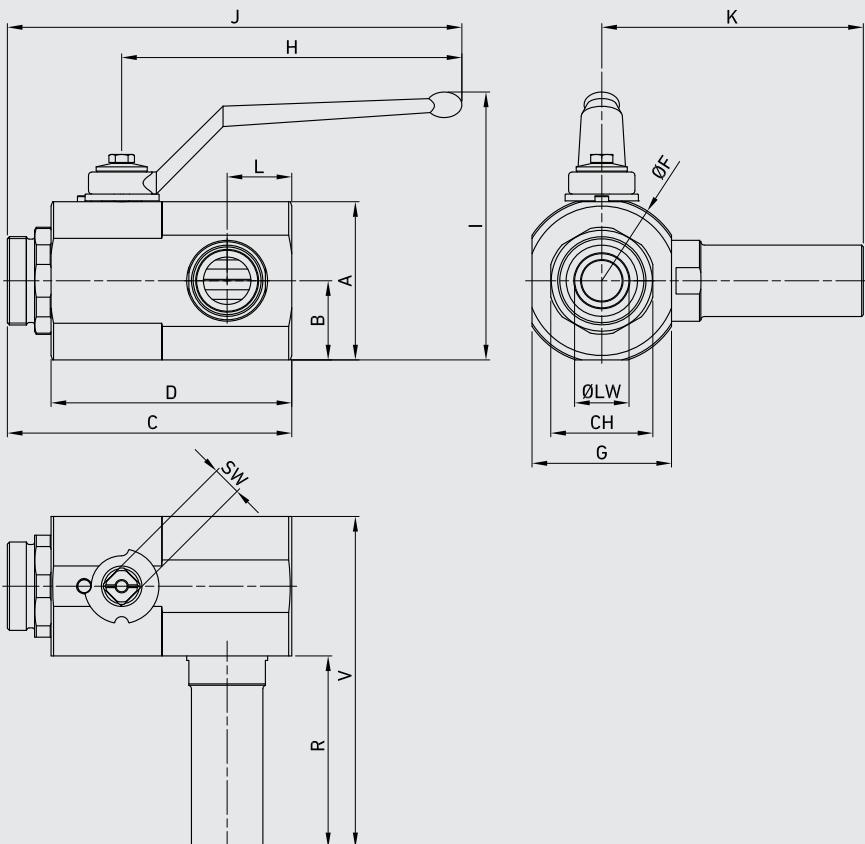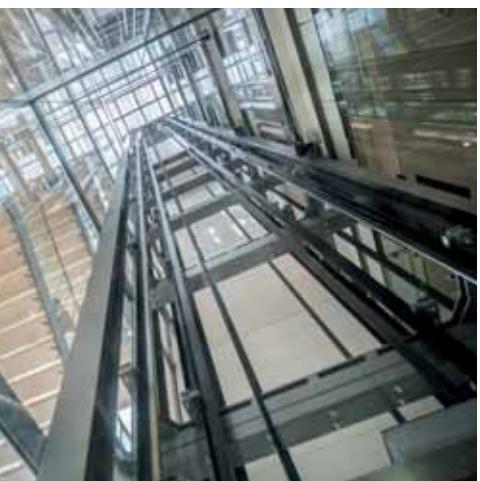

## FOR BUILDING

TYPE / ITEM CODE	DN	A	B	C	D	H	I	L	J	ØM	ØLW	CH	G	ØF	K	R	V	SW	
VA DN25 35L PIPE 35L	25	mm	71	35,5	146	119,6	180	120	38	240	M45x2	25	55	74	83,5	178	141	215	14
		inch	2,80	1,40	5,75	4,71	7,09	4,72	1,50	9,45		0,98		2,91	3,29	7,01	5,55	8,46	0,55
VA DN32 42L PIPE 42L	32	mm	93	46,5	163,2	137,5	200	158	38	263	M52x2	32	60	82	98	161	120	202	17
		inch	3,66	1,83	6,43	5,41	7,87	6,22	1,50	10,35		1,26		3,23	3,86	6,34	4,72	7,95	0,67
VA DN32 G1 1/4 PIPE 35L	32	mm	93	46,5	157,5	137,5	200	158	38	257,5	G 1 1/4	32	70	82	98	126	141	167	17
		inch	3,66	1,83	6,20	5,41	7,87	6,22	1,50	10,14		1,26		3,23	3,86	4,96	5,55	6,57	0,67
VA DN32 G1 1/2 PIPE 42L	32	mm	93	46,5	157,5	137,5	200	158	38	257,5	G 1 1/2	32	70	82	98	161	120	202	17
		inch	3,66	1,83	6,20	5,41	7,87	6,22	1,50	10,14		1,26		3,23	3,86	6,34	4,72	7,95	0,67

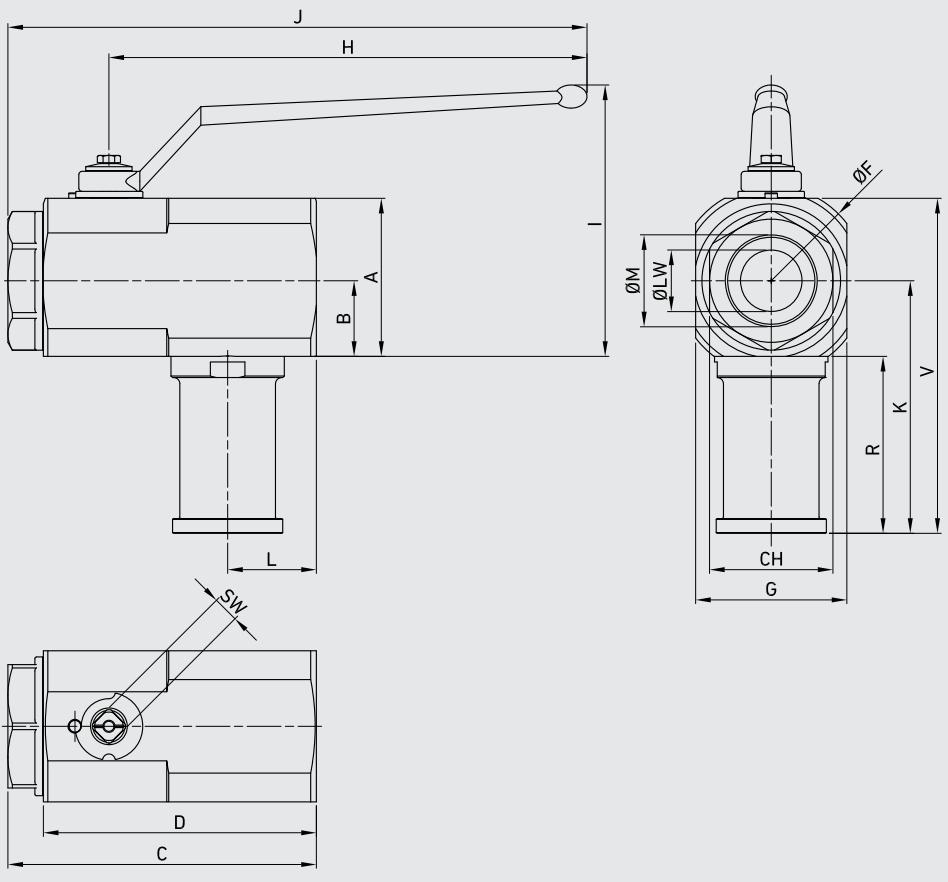

## FOR BUILDING

TYPE / ITEM CODE	DN	A	B	C	D	H	I	L	J	ØM	ØLW	CH	G	ØF	K	R	V	SW
VA DN40 G2R PIPE SAE3000	40	mm 102,5 inch 4,04	49 1,93	200 7,87	177 6,97	310 12,20	176 6,93	57,5 2,26	375,5 14,78	G2	40 1,57	80	98 3,86	123 4,84	164 6,46	115 4,53	217 8,54	17 0,67
VA DN40 G2R PIPE 42L	40	mm 102,5 inch 4,04	49 1,93	200 7,87	177 6,97	200 7,87	167 6,57	57,5 2,26	265,5 10,45	G2	40 1,57	80	98 3,86	123 4,84	128,5 5,06	79,5 3,13	182 7,17	17 0,67
VA DN40 G2R PIPE G2M	40	mm 102,5 inch 4,04	49 1,93	200 7,87	177 6,97	200 7,87	167 6,57	57,5 2,26	265,5 10,45	G2	40 1,57	80	98 3,86	123 4,84	158 6,22	109 4,29	211,5 8,33	17 0,67

On request


Supply and assembly of NUT and CUTTING RING

Supply of KIT for pipe separately

Pipe available with different threads


## CUSTOMIZED

### HYDRAULIC VALVES

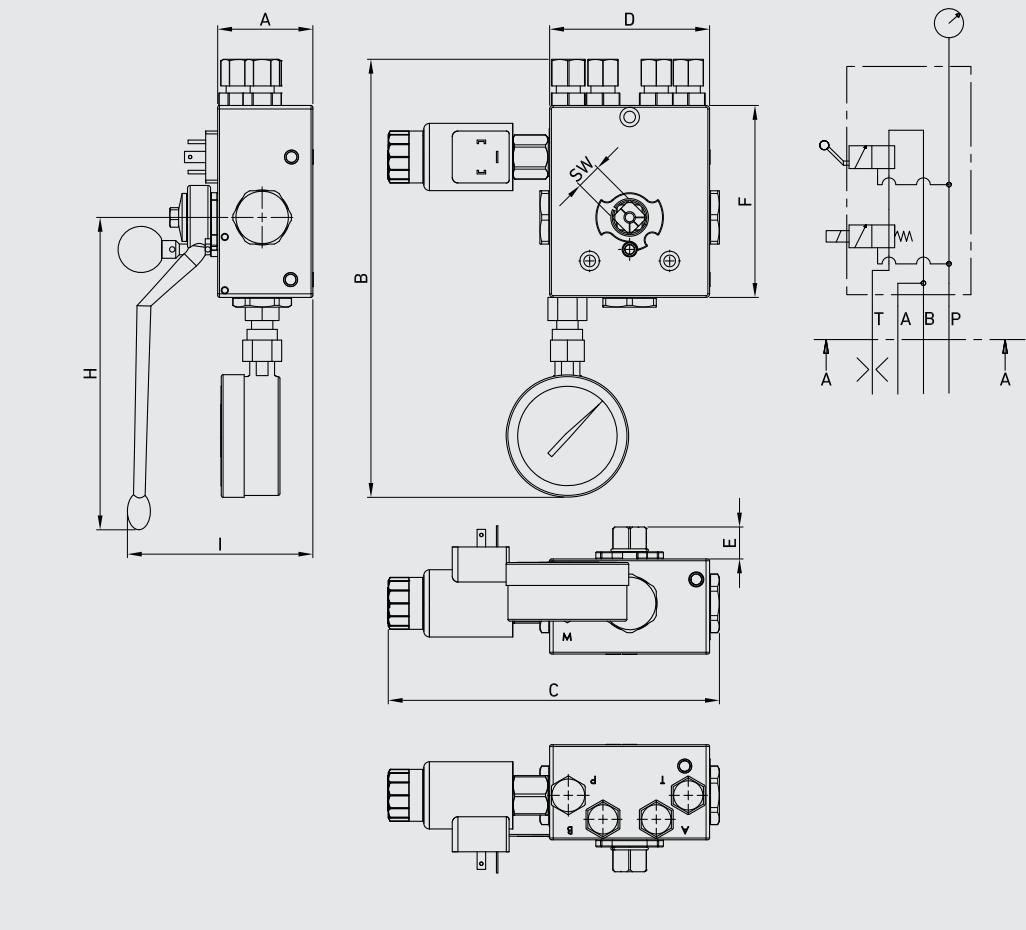




## FOR MARINE

TYPE / ITEM CODE	DN	A	B	C	D	E	F	H	I	SW
G3DB 3/8	10	mm 53,5 inch 2,11	247	186	90	18	108	178	104	14
			9,72	7,32	3,54	0,71	4,25	7,01	4,09	0,55

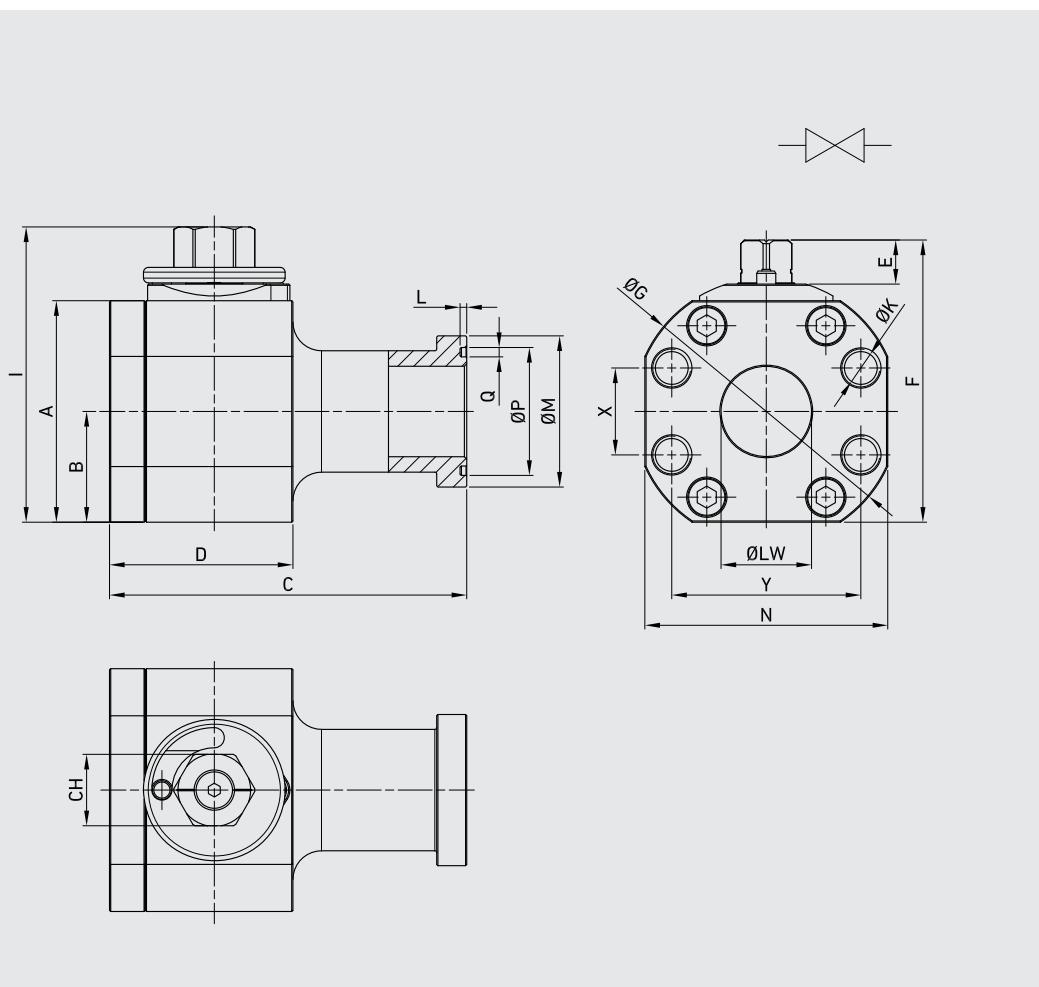


## FOR BUILDING / HEAVY EQUIPMENT

TYPE / ITEM CODE	DN	A	B	C	D	E	F	ØG	I	L	ØM	N	CH	ØP	Q	X	Y	ØK	ØLW	
GB2 S6 1 1/2	4	mm	93	46,5	150	77	18,5	118,5	112	124	2,79	63,5	102	30	53,72	3,94	36,5	79,4	4xM16	38
		inch	3,66	1,83	5,91	3,03	0,73	4,67	4,41	4,88	0,11	2,50	4,02		2,11	0,16	1,44	3,13		1,50
GB2 S3 2	25	mm	93	46,5	150	77	18,5	118,5	112	124	2,79	71,75	102	30	63,25	3,94	42,9	77,8	4xM12	38
		inch	3,66	1,83	5,91	3,03	0,73	4,67	4,41	4,88	0,11	2,82	4,02		2,49	0,16	1,69	3,06		1,50

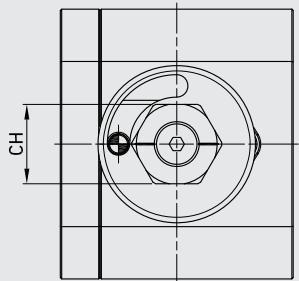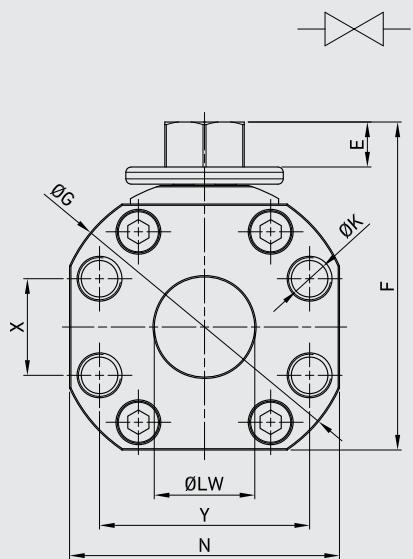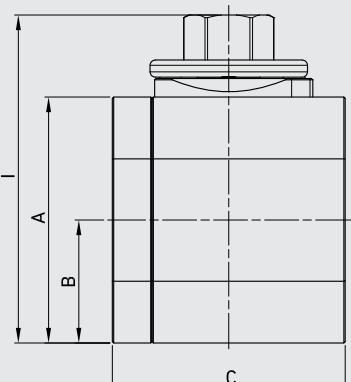

## ■ FOR BUILDING / HEAVY EQUIPMENT

TYPE / ITEM CODE	DN	A	B	C	D	E	F	ØG	I	L	ØM	N	CH	ØP	Q	X	Y	ØK	ØLW
GB2 S3 2	25	mm 93	46,5	88	-	18,5	118,5	112	124	-	-	102	30	-	-	36,5	79,4	4xM16	38
		inch 3,66	1,83	3,46	-	0,73	4,67	4,41	4,88	-	-	4,02		-	-	1,44	3,13		1,50

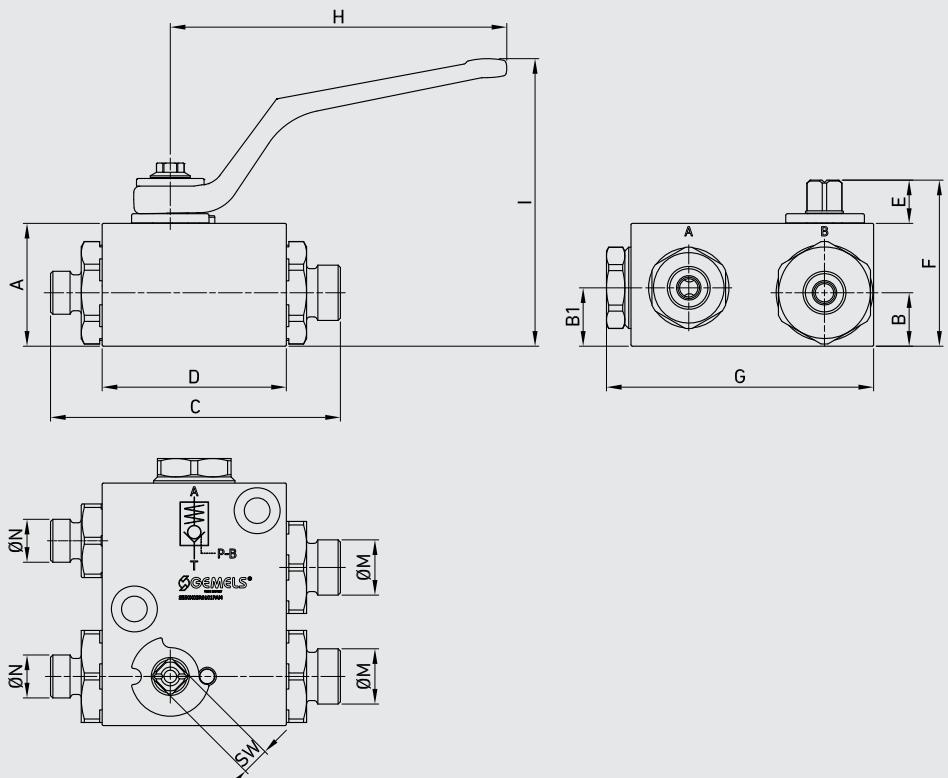


## FOR BUILDING / HEAVY EQUIPMENT

TYPE / ITEM CODE	DN	A	B	B1	C	D	E	F	G	H	I	ØM	ØN	SW
GESP4 DIN12L/8L	10	mm 40	17,4	19	94,4	60	14,1	54,1	87	110	94	DIN 12L	DIN 8L	9
VBPSE 3/8 DN10		inch 1,57	0,69	0,75	3,72	2,36	0,56	2,13	3,43	4,33	3,70	-	-	0,35

## CUSTOMIZED

### HYDRAULIC VALVES

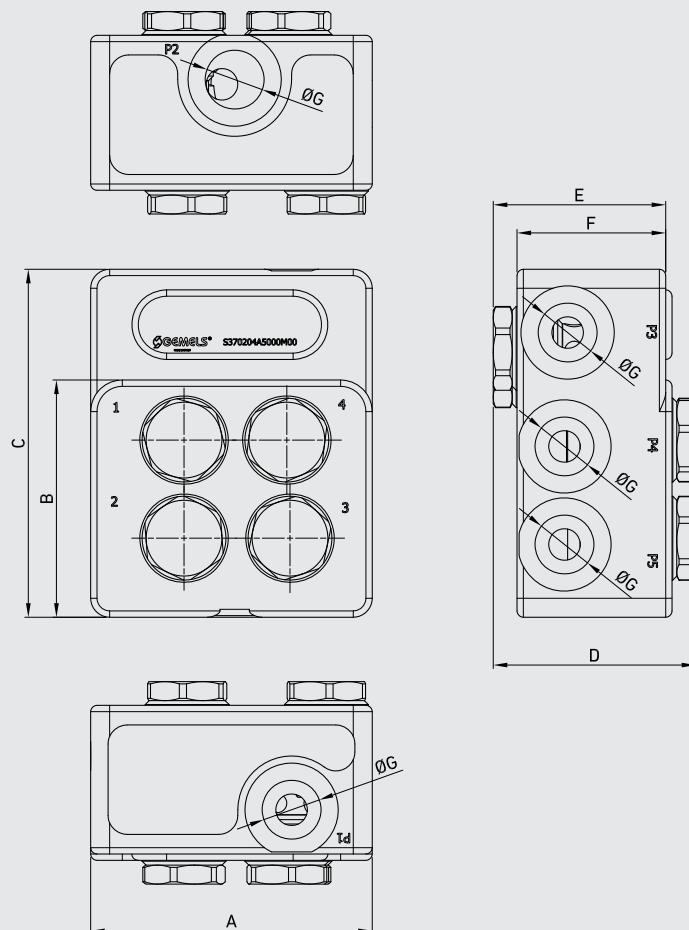

## FOR AGRICULTURAL

TYPE / ITEM CODE	DN	A	B	C	D	E	F	ØG
GEMFOLD G1/2 85/50L	25	mm inch	89 3,50	75 2,95	110 4,33	64 2,52	54,5 2,15	47 1,85
								G 1/2 -





# GEM

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0


### CS Carbon Steel

- Type: ball valve 2 way
- Sizes: DN6
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### SS Stainless Steel

- Type: ball valve 2 way
- Sizes: DN6
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

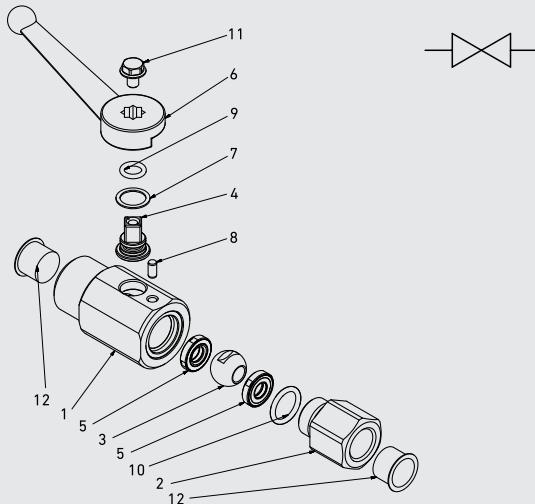

POS	DESCRIPTION	Q.TY	CS	SS	
			Carbon Steel	MATERIAL	Stainless Steel
1	Body	1		1,0737	1,4305
2	Adapter	1		1,0737	1,4305
3	Ball	1		1,0737	1,4404
4	Stem	1		1,0737	1,4305
5	Ball seat	2	POM		POM
6	Handle	1	ZINC		ZINC
7	Stem ring	1	POM		POM
8	Pin	1	1,0737		1,4301
9	Stem o-ring	1	NBR		NBR
10	Adapter o-ring	2	NBR		NBR
11	Screw	1	DIN 6921 8.8		DIN 6921 A2
12	Caps	2	PVC		PVC



## CODE DESCRIPTION STRUCTURE

<b>GEM</b>	<b>G 1/4</b>	<b>DN6</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>A</b>	<b>B</b>
------------	--------------	------------	----------	----------	----------	----------	----------	----------

Type and way of valve \_\_\_\_\_

GEM 2-way

Ends \_\_\_\_\_

GAS DIN/ NPT ANSI SAE  
ISO 228 /ASME J1926-1  
BSP B1.20.1  
G 1/4 N 1/4 SAE4

Size \_\_\_\_\_

DN6

Body Material \_\_\_\_\_

- 1 = 1,0737
- 3 = 1,4305

Adapter material \_\_\_\_\_

- 1 = 1,0737 3 = 1,4305\*
- 3 = 1,4305

Stem material \_\_\_\_\_

- 1 = 1,0737 3 = 1,4305\*
- 3 = 1,4305

Ball Material \_\_\_\_\_

- 4 = 1,4404
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* C = PTFE\*





Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request


- Reduced bore
- Special threads
- Pressure class up to PN50 Mpa
- Locking device

For further special requests please consult our technical/commercial service.

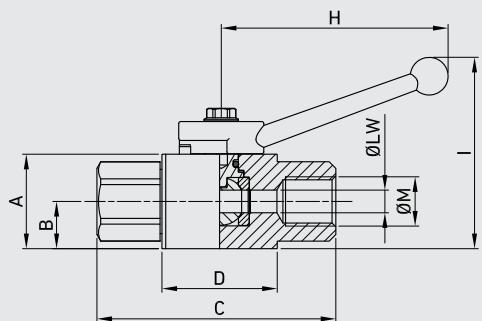


### GEM DIN/ISO 228 BSP

TYPE	DN	PN		A	B	C	D	E	F	ØG	H	I	ØM	SW	ØLW	WEIGHT	ITEM CODE								
				mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	CS Carbon Steel	SS Stainless Steel								
GEM G 1/4	6	MPa 50 Psi 7250		25	0,98	12,5	0,49	63	2,48	31,5	1,24	7	0,28	32,5	1,28	26,8	1,06	60	2,36	51	G 1/4	6 0,24	6 0,24	kg 0,195 lb 0,43	G12GGT15011A000 G12GGT15033A000



### GEM ANSI/ASME B1.20.1 NPT

TYPE	DN	PN		A	B	C	D	E	F	ØG	H	I	ØM	SW	ØLW	WEIGHT	ITEM CODE								
				mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	CS Carbon Steel	SS Stainless Steel								
GEM N 1/4	6	MPa 50 Psi 7250		25	0,98	12,5	0,49	63	2,48	31,5	1,24	7	0,28	32,5	1,28	26,8	1,06	60	2,36	51	N 1/4	6 0,24	6 0,24	kg 0,195 lb 0,43	G12NNT15011A000 G12NNT15033A000



## GEM SAE J1926-1

TYPE	DN	PN		A	B	C	D	E	F	ØG	H	I	ØM	SW	ØLW	WEIGHT	ITEM CODE			
				mm	25	12,5	63	31,5	7	32,5	26,8	60	51	7/16-	6	6	kg	0,195	CS Carbon Steel	SS Stainless Steel
GEM SAE4	6	MPa 50	inch 7250	mm	25	12,5	63	31,5	7	32,5	26,8	60	51	7/16-	6	6	kg	0,195	G12EEE05011A000	G12EEE05033A000
				inch	0,98	0,49	2,48	1,24	0,28	1,28	1,06	2,36	2,01	20 UNF	0,24	0,24	lb	0,43		

# GE1


## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0

### CS Carbon Steel

- Type: ball valve 2 way
- Sizes: from DN6 up to DN13
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### STANDARD COMPOSITION OF VALVE

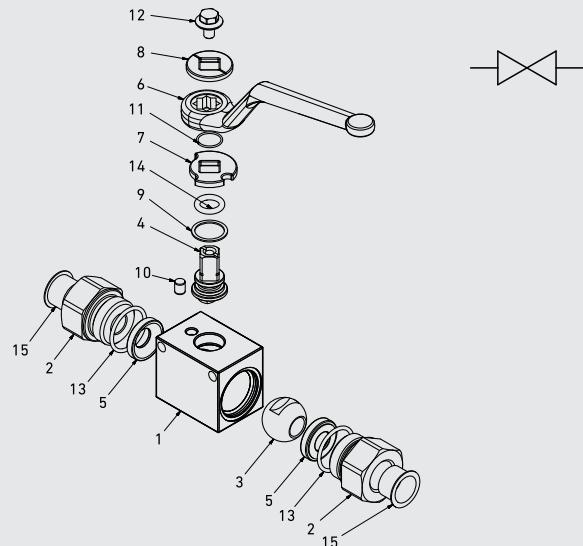

**CS**  
Carbon Steel

POS	DESCRIPTION	Q.TY	MATERIAL
1	Body	1	1,0737
2	Adapter	2	1,0737
3	Ball	1	1,0737
4	Stem	1	1,0737
5	Ball seat	2	POM
6	Handle	1	ZINC
7	Washer	1	1,0116
8	Washer	1	1,0116
9	Stem ring	1	POM
10	Pin	1	1,0737
11	Seeger	1	1,4301
12	Adapter o-ring	2	NBR
13	Stem o-ring	1	NBR
14	Screw	1	Din 6921 8.8
15	Caps	2	PVC



SMALLER DESIGN

## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GE1 2-way

Ends \_\_\_\_\_

GAS DIN/ ISO 228	NPT ANSI /ASME	SAE J1926-1
BSP	B1.20.1	
G 1/4	N 1/4	SAE4
G 3/8	N 3/8	SAE6
G 1/2	N 1/2	SAE8

Size \_\_\_\_\_

from DN6 to DN13

Body Material \_\_\_\_\_

● 1 = 1,0737

Adapter material \_\_\_\_\_

● 1 = 1,0737

Stem material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Ball Material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Seat material \_\_\_\_\_

A = POM




Seal material \_\_\_\_\_

B = NBR


\*On request

- Reduced bore
- Special threads
- Pressure class up to PN50 MPa
- Pneumatic and electrical actuator
- Security block
- Locking device

For further special requests please consult our technical/commercial service.

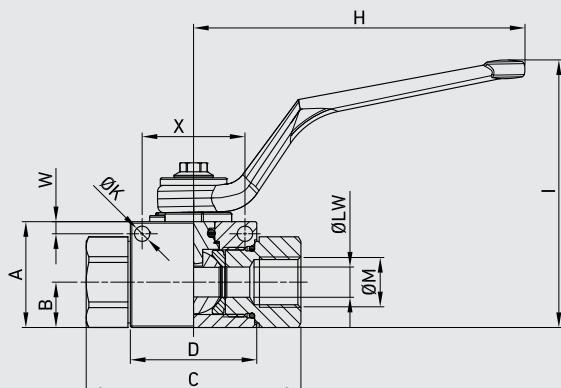


**SMALLER  
DESIGN**



## GE1 DIN/ISO 228 BSP

TYPE	DN	PN		A	B	C	D	E	F	G	H	I	ØM	ØK	W	X	SW	ØLW	WEIGHT	ITEM CODE
				mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	
GE1 G 1/4	6	MPa	50	33	14,3	69	39,4	11,1	47,25	26	110	87	G 1/4	5,10	4	34	9	6	kg 0,378	GE1GGT15011A000
		Psi	7250	1,30	0,56	2,72	1,55	0,44	1,86	1,02	4,33	3,43		0,20	0,16	1,34	0,35	0,24	lb 0,83	
GE1 G 3/8	10	MPa	50	35	15	71	41,8	11,1	49,25	30	110	89	G 3/8	5,1	4	34	9	10	kg 0,467	GE1GGT25011A000
		Psi	7250	1,38	0,59	2,80	1,65	0,44	1,94	1,18	4,33	3,50		0,20	0,16	1,34	0,35	0,39	lb 1,03	
GE1 G 1/2	13	MPa	50	40	18,3	83	44,4	11,1	54,25	35	110	94	G 1/2	5,1	4	36	9	13	kg 0,635	GE1GGT35011A000
		Psi	7250	1,57	0,72	3,27	1,75	0,44	2,14	1,38	4,33	3,70		0,20	0,16	1,42	0,35	0,51	lb 1,40	


**FIXING HOLES  
INCLUDED**



## GE1 ANSI/ASME B1.20.1 NPT

TYPE	DN	PN		A	B	C	D	E	F	G	H	I	ØM	ØK	W	X	SW	ØLW	WEIGHT	ITEM CODE
				mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	
GE1 N 1/4	6	MPa	50	33	14,3	69	39,4	11,1	47,25	26	110	87	N 1/4	5,10	4	34	9	6	kg 0,378	GE1NNT15011A000
		Psi	7250	1,30	0,56	2,72	1,55	0,44	1,86	1,02	4,33	3,43		0,20	0,16	1,34	0,35	0,24	lb 0,83	
GE1 N 3/8	10	MPa	50	35	15	71	41,8	11,1	49,25	30	110	89	N 3/8	5,1	4	34	9	10	kg 0,467	GE1NNT25011A000
		Psi	7250	1,38	0,59	2,80	1,65	0,44	1,94	1,18	4,33	3,50		0,20	0,16	1,34	0,35	0,39	lb 1,03	
GE1 N 1/2	13	MPa	50	40	18,3	83	44,4	11,1	54,25	35	110	94	N 1/2	5,1	4	36	9	13	kg 0,635	GE1NNT35011A000
		Psi	7250	1,57	0,72	3,27	1,75	0,44	2,14	1,38	4,33	3,70		0,20	0,16	1,42	0,35	0,51	lb 1,40	

**FIXING HOLES  
INCLUDED**



## GE1 SAE J1926-1

TYPE	DN	PN		A	B	C	D	E	F	G	H	I	ØM	ØK	W	X	SW	ØLW	WEIGHT	ITEM CODE	
				MPa	50	mm	33	14,3	69	39,4	11,1	47,25	26	110	87	7/16	5,10	4	34	9	kg 0,378
GE1 SAE4	6	MPa	50	mm	33	14,3	69	39,4	11,1	47,25	26	110	87	7/16	5,10	4	34	9	6	kg 0,378	GE1EEE05011A000
		Psi	7250	inch	1,30	0,56	2,72	1,55	0,44	1,86	1,02	4,33	3,43	UNF	0,20	0,16	1,34	0,35	0,24	lb 0,83	
GE1 SAE6	10	MPa	50	mm	35	15	71	41,8	11,1	49,25	30	110	89	9/16	5,1	4	34	9	10	kg 0,467	GE1EEE15011A000
		Psi	7250	inch	1,38	0,59	2,80	1,65	0,44	1,94	1,18	4,33	3,50	UNF	0,20	0,16	1,34	0,35	0,39	lb 1,03	
GE1 SAE8	13	MPa	50	mm	40	18,3	83	44,4	11,1	54,25	35	110	94	3/4	5,1	4	36	9	13	kg 0,635	GE1EEE25011A000
		Psi	7250	inch	1,57	0,72	3,27	1,75	0,44	2,14	1,38	4,33	3,70	UNF	0,20	0,16	1,42	0,35	0,51	lb 1,40	

FIXING HOLES  
INCLUDED



# GE2

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0


### CS Carbon Steel

- Type: ball valve 2 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE-DIN
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### SS Stainless Steel

- Type: ball valve 2 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE-DIN
- Pressure: up to PN500
- Temp range: from -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

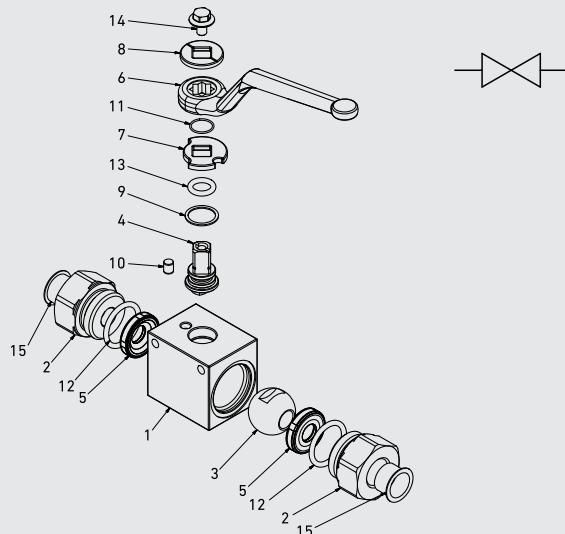

POS	DESCRIPTION	Q.TY	CS	SS	
			Carbon Steel	MATERIAL	Stainless Steel
1	Body	1		1,0737	1,4404
2	Adapter	2		1,0737	1,4404
3	Ball	1		1,0737	1,4404
4	Stem	1		1,0737	1,4404
5	Ball seat	2	POM		POM
6	Handle	1	ZINC		ZINC
7	Washer	1	1,0116		1,4301
8	Washer	1	1,0116		1,4301
9	Stem ring	1	POM		POM
10	Pin	1	1,0737		1,4301
11	Seeger	1	1,4301		1,4301
12	Adapter o-ring	2	NBR		NBR
13	Stem o-ring	1	NBR		NBR
14	Screw	1	Din 6921 8.8		Din 6921 A2
15	Caps	2	PVC		PVC



## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GE2 2-way

Ends \_\_\_\_\_

GAS DIN/ ISO 228 BSP	NPT ANSI /ASME B1.20.1	SAE J1926-1	DIN 2353 HEAVY SERIES	DIN 2353 LIGHT SERIES
G 1/4	N 1/4	SAE4	8S	6L
G 3/8	N 3/8	SAE6	10S	8L
G 1/2	N 1/2	SAE8	12S	10L
G 3/4	N 3/4	SAE12	14S	12L
G 1	N 1	SAE16	16S	15L
G 1 1/4 R	N 1 1/4 R	SAE20R	20S	18L
G 1 1/2 R	N 1 1/2 R	SAE24R	25S 30S 38S	22L 28L 35L 42L

Size \_\_\_\_\_

from DN6 to DN25

Body Material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Stem material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404\*
- 4 = 1,4404

Ball Material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*



Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN50 MPa
- Pneumatic and electrical actuator
- Security block
- Locking device
- Fixing holes for SS valves

For further special requests please consult our technical/commercial service.

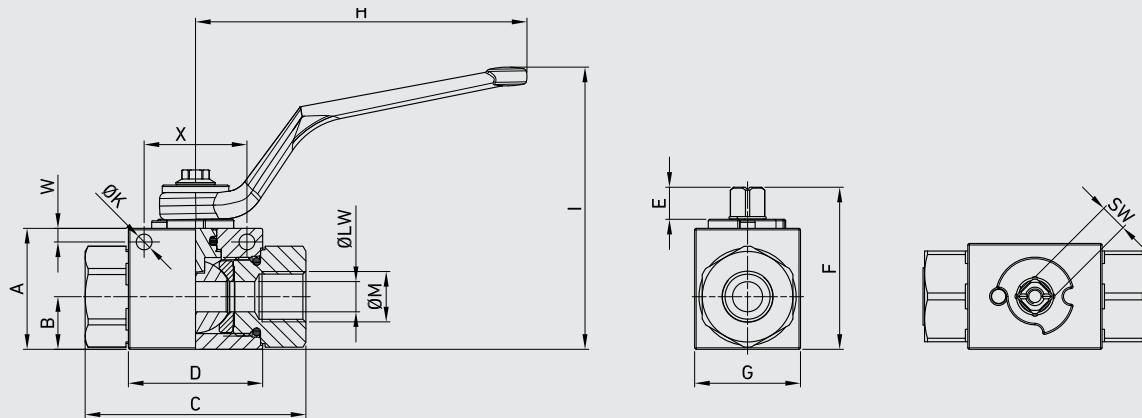


## GE2 DIN/ISO 228 BSP

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	ØM	ØK*	W*	X*	SW	ØLW	WEIGHT	ITEM CODE	
																			CS	SS
																			Carbon Steel	Stainless Steel
GE2 G 1/4	6	MPa 50	mm 35	14,5	71	42,4	11	49	30	110	87	G 1/4	5,25	4,5	34	9	6	kg 0,49	GE2GGT15011A000	GE2GGT15044A000
		Psi 7250	inch 1,38	0,57	2,80	1,67	0,43	1,93	1,18	4,33	3,43		0,21	0,18	1,34	0,35	0,24	lb 1,08		
GE2 G 3/8	10	MPa 50	mm 40	17,4	73	44,4	11	54,25	35	110	93	G 3/8	5,25	4,5	34	9	10	kg 0,644	GE2GGT25011A000	GE2GGT25044A000
		Psi 7250	inch 1,57	0,69	2,87	1,75	0,43	2,14	1,38	4,33	3,66		0,21	0,18	1,34	0,35	0,39	lb 1,42		
GE2 G 1/2	13	MPa 50	mm 43	19,7	83	48,4	11	57	37	110	97	G 1/2	5,25	5	36	9	13	kg 0,757	GE2GGT35011A000	GE2GGT35044A000
		Psi 7250	inch 1,69	0,78	3,27	1,91	0,43	2,24	1,46	4,33	3,82		0,21	0,20	1,42	0,35	0,51	lb 1,67		
GE2 G 3/4	20	MPa 42	mm 57	25,4	95	62,5	14	75,5	49	180	105	G 3/4	6,25	6	50	14	20	kg 1,438	GE2GGT44011A000	GE2GGT44044A000
		Psi 6090	inch 2,24	1,00	3,74	2,46	0,55	2,97	1,93	7,09	4,13		0,25	0,24	1,97	0,55	0,79	lb 3,17		
GE2 G 1	25	MPa 42	mm 65	29,5	112	66,5	14	83,5	55	180	113	G 1	6,25	6	50	14	25	kg 2,223	GE2GGT53011A000	GE2GGT53044A000
		Psi 6090	inch 2,56	1,16	4,41	2,62	0,55	3,29	2,17	7,09	4,45		0,25	0,24	1,97	0,55	0,98	lb 4,90		
GE2 G 1 1/4 R	25	MPa 42	mm 65	29,5	120	66,5	14	83,5	55	180	113	G 1	6,25	6	50	14	25	kg 2,273	GE2GGR63011A000	GE2GGR63044A000
		Psi 6090	inch 2,56	1,16	4,72	2,62	0,55	3,29	2,17	7,09	4,45	1/4	0,25	0,24	1,97	0,55	0,98	lb 5,01		
GE2 G 1 1/2 R	25	MPa 42	mm 65	29,5	124	66,5	14	83,5	55	180	113	G 1	6,25	6	50	14	25	kg 2,386	GE2GGR73011A000	GE2GGR73044A000
		Psi 6090	inch 2,56	1,16	4,88	2,62	0,55	3,29	2,17	7,09	4,45	1/2	0,25	0,24	1,97	0,55	0,98	lb 5,26		

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED




## GE2 ANSI/ASME B1.20.1 NPT

TYPE	DN	PN		A	B	C	D	E	F	G	H	I	ØM	ØK*	W*	X*	SW	ØLW	WEIGHT	ITEM CODE	CS Carbon Steel	SS Stainless Steel
GE2 N 1/4	6	MPa 50	mm 35	14,5	71	42,4	11	49	30	110	87	N 1/4	5,25	4,5	34	9	6	kg 0,49	GE2NNT15011A000	GE2NNT15044A000		
		Psi 7250	inch 1,38	0,57	2,80	1,67	0,43	1,93	1,18	4,33	3,43		0,21	0,18	1,34	0,35	0,24	lb 1,08				
GE2 N 3/8	10	MPa 50	mm 40	17,4	73	44,4	11	54,25	35	110	93	N 3/8	5,25	4,5	34	9	10	kg 0,644	GE2NNT25011A000	GE2NNT25044A000		
		Psi 7250	inch 1,57	0,69	2,87	1,75	0,43	2,14	1,38	4,33	3,66		0,21	0,18	1,34	0,35	0,39	lb 1,42				
GE2 N 1/2	13	MPa 50	mm 43	19,7	83	48,4	11	57	37	110	97	N 1/2	5,25	5	36	9	13	kg 0,757	GE2NNT35011A000	GE2NNT35044A000		
		Psi 7250	inch 1,69	0,78	3,27	1,91	0,43	2,24	1,46	4,33	3,82		0,21	0,20	1,42	0,35	0,51	lb 1,67				
GE2 N 3/4	20	MPa 42	mm 57	25,4	95	62,5	14	75,5	49	180	105	N 3/4	6,25	6	50	14	20	kg 1,438	GE2NNT44011A000	GE2NNT44044A000		
		Psi 6090	inch 2,24	1,00	3,74	2,46	0,55	2,97	1,93	7,09	4,13		0,25	0,24	1,97	0,55	0,79	lb 3,17				
GE2 N 1	25	MPa 42	mm 65	29,5	112	66,5	14	83,5	55	180	113	N 1	6,25	6	50	14	25	kg 2,223	GE2NNT53011A000	GE2NNT53044A000		
		Psi 6090	inch 2,56	1,16	4,41	2,62	0,55	3,29	2,17	7,09	4,45		0,25	0,24	1,97	0,55	0,98	lb 4,90				
GE2 N 1 1/4 R	25	MPa 42	mm 65	29,5	120	66,5	14	83,5	55	180	113	N 1	6,25	6	50	14	25	kg 2,273	GE2NNR63011A000	GE2NNR63044A000		
		Psi 6090	inch 2,56	1,16	4,72	2,62	0,55	3,29	2,17	7,09	4,45		0,25	0,24	1,97	0,55	0,98	lb 5,01				
GE2 N 1 1/2 R	25	MPa 42	mm 65	29,5	124	66,5	14	83,5	55	180	113	N 1	6,25	6	50	14	25	kg 2,386	GE2NNR73011A000	GE2NNR73044A000		
		Psi 6090	inch 2,56	1,16	4,88	2,62	0,55	3,29	2,17	7,09	4,45		0,25	0,24	1,97	0,55	0,98	lb 5,26				

█ Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED





## GE2 SAE J1926-1

TYPE	DN	PN		A	B	C	D	E	F	G	H	I	ØM	ØK*	W*	X*	SW	ØLW	WEIGHT	ITEM CODE	CS Carbon Steel	SS Stainless Steel
GE2 SAE4	6	MPa 50	mm 35	14,5	71	42,4	11,1	49	30	110	87	7/16	5,25	4,5	34	9	6	kg 0,512	GE2EEE05011A000	GE2EEE05044A000		
		Psi 7250	inch 1,38	0,57	2,80	1,67	0,44	1,93	1,18	4,33	3,43	UNF	0,21	0,18	1,34	0,35	0,24	lb 1,13				
GE2 SAE6	10	MPa 50	mm 40	17,5	73	44,8	11,1	54,25	35	110	93	9/16	5,25	4,5	34	9	10	kg 0,5	GE2EEE15011A000	GE2EEE15044A000		
		Psi 7250	inch 1,57	0,69	2,87	1,76	0,44	2,14	1,38	4,33	3,66	UNF	0,21	0,18	1,34	0,35	0,39	lb 1,10				
GE2 SAE8	13	MPa 50	mm 43	19,7	83	48,4	11,1	57,25	37	110	97	3/4	5,25	5	36	9	13	kg 0,779	GE2EEE25011A000	GE2EEE25044A000		
		Psi 7250	inch 1,69	0,78	3,27	1,91	0,44	2,25	1,46	4,33	3,82	UNF	0,21	0,20	1,42	0,35	0,51	lb 1,72				
GE2 SAE12	20	MPa 42	mm 57	25,4	95	62,5	14,35	75,5	49	180	105	1 1/16	6,25	6	50	9	10	kg 1,441	GE2EEE34011A000	GE2EEE34044A000		
		Psi 6090	inch 2,24	1,00	3,74	2,46	0,56	2,97	1,93	7,09	4,13	UNF	0,25	0,24	1,97	0,35	0,39	lb 3,18				
GE2 SAE16	25	MPa 42	mm 65	29,5	112,4	66,5	14,35	83,5	55	180	113	1 5/16	6,25	6	50	9	13	kg 2,335	GE2EEE43011A000	GE2EEE43044A000		
		Psi 6090	inch 2,56	1,16	4,43	2,62	0,56	3,29	2,17	7,09	4,45	UNF	0,25	0,24	1,97	0,35	0,51	lb 5,15				
GE2 SAE20R	25	MPa 42	mm 65	29,5	120,4	66,5	14,35	83,5	55	180	113	1 5/8	6,25	6	50	9	10	kg 2,307	GE2EEE53011A000	GE2EEE53044A000		
		Psi 6090	inch 2,56	1,16	4,74	2,62	0,56	3,29	2,17	7,09	4,45	UNF	0,25	0,24	1,97	0,35	0,39	lb 5,09				
GE2 SAE24R	25	MPa 42	mm 65	29,5	124,4	66,5	14,35	83,5	55	180	113	1 7/8	6,25	6	50	9	13	kg 2,399	GE2EEE63011A000	GE2EEE63044A000		
		Psi 6090	inch 2,56	1,16	4,90	2,62	0,56	3,29	2,17	7,09	4,45	UNF	0,25	0,24	1,97	0,35	0,51	lb 5,29				

█ Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED

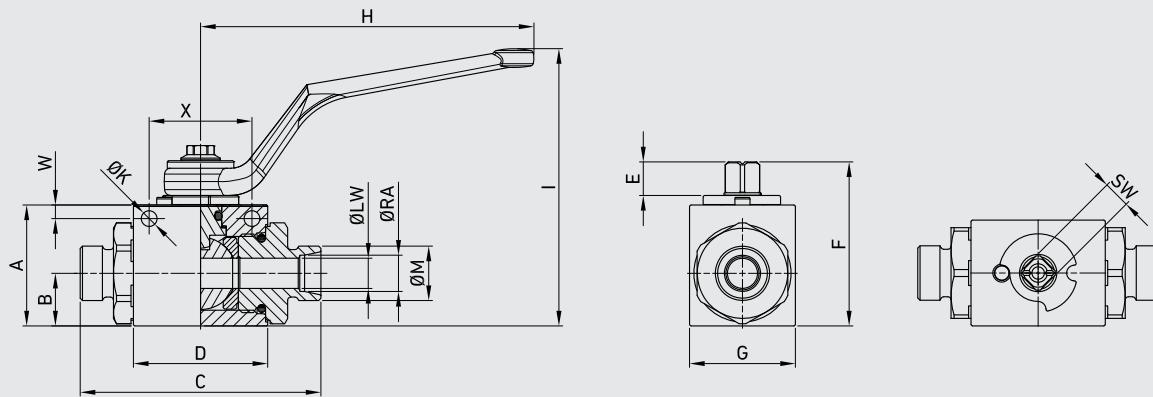


## GE2 DIN 2353 HEAVY SERIES

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	ØM	ØK*	W*	X*	SW	ØLW	ØRA	ITEM CODE		
																			CS	SS	
																			Carbon Steel	Stainless Steel	
GE2 8S	6	MPa 50	mm 35	14,5	76	42,4	11,1	49,25	30	110	87	M16x1,5	5,25	4,5	34	9	4	8	kg 0,501	GE2DDS05011A000	GE2DDS05044A000
		Psi 7250	inch 1,38	0,57	2,99	1,67	0,44	1,94	1,18	4,33	3,43		0,21	0,18	1,34	0,35	0,16	0,31	lb 1,10		
GE2 10S	6	MPa 50	mm 35	14,5	76	42,4	11,1	49,25	30	110	87	M18x1,5	5,25	4,5	34	9	6	10	kg 0,501	GE2DDS15011A000	GE2DDS15044A000
		Psi 7250	inch 1,38	0,57	2,99	1,67	0,44	1,94	1,18	4,33	3,43		0,21	0,18	1,34	0,35	0,24	0,39	lb 1,10		
GE2 12S	8	MPa 50	mm 35	14,5	76	42,4	11	49,25	30	110	87	M20x1,5	5,25	4,5	34	9	8	12	kg 0,501	GE2DDRS5011A000	GE2DDRS5044A000
		Psi 7250	inch 1,38	0,57	2,99	1,67	0,43	1,94	1,18	4,33	3,43		0,21	0,18	1,34	0,35	0,31	0,47	lb 1,10		
GE2 12S	10	MPa 50	mm 40	17,4	76	44,4	11	54,25	35	110	93	M20x1,5	5,25	4,5	34	9	10	12	kg 0,599	GE2DDS25011A000	GE2DDS25044A000
		Psi 7250	inch 1,57	0,69	2,99	1,75	0,43	2,14	1,38	4,33	3,66		0,21	0,18	1,34	0,35	0,39	0,47	lb 1,32		
GE2 14S	10	MPa 50	mm 40	17,4	82,5	44,4	11	54,25	35	110	93	M22x1,5	5,25	4,5	34	9	10	14	kg 0,629	GE2DDS35011A000	GE2DDS35044A000
		Psi 7250	inch 1,57	0,69	3,25	1,75	0,43	2,14	1,38	4,33	3,66		0,21	0,18	1,34	0,35	0,39	0,55	lb 1,39		
GE2 16S	13	MPa 50	mm 43	19,7	89	48,4	11	57	37	110	97	M24x1,5	5,25	5	36	9	13	16	kg 0,67	GE2DDS45011A000	GE2DDS45044A000
		Psi 7250	inch 1,69	0,78	3,50	1,91	0,43	2,24	1,46	4,33	3,82		0,21	0,20	1,42	0,35	0,51	0,63	lb 1,48		
GE2 20S	13	MPa 50	mm 43	19,7	93	48,4	11	57	37	110	97	M30x2	5,25	5	36	9	13	20	kg 0,786	GE2DDS55011A000	GE2DDS55044A000
		Psi 7250	inch 1,69	0,78	3,66	1,91	0,43	2,24	1,46	4,33	3,82		0,21	0,20	1,42	0,35	0,51	0,79	lb 1,73		
GE2 25S	20	MPa 40	mm 57	25,4	111	62,5	14	75,5	49	180	105	M36x2	6,25	6	50	14	20	25	kg 1,485	GE2DDS64011A000	GE2DDS64044A000
		Psi 5800	inch 2,24	1,00	4,37	2,46	0,55	2,97	1,93	7,09	4,13		0,25	0,24	1,97	0,55	0,79	0,98	lb 3,27		
GE2 30S	25	MPa 35	mm 65	29,5	121	66,5	14	83,5	55	180	113	M42x2	6,25	6	50	14	25	30	kg 2,145	GE2DDS73011A000	GE2DDS73044A000
		Psi 5075	inch 2,56	1,16	4,76	2,62	0,55	3,29	2,17	7,09	4,45		0,25	0,24	1,97	0,55	0,98	1,18	lb 4,73		
GE2 38S	25	MPa 35	mm 65	29,5	131	66,5	14	83,5	55	180	113	M52x2	6,25	6	50	14	25	38	kg 2,373	GE2DDS83011A000	GE2DDS83044A000
		Psi 5075	inch 2,56	1,16	5,16	2,62	0,55	3,29	2,17	7,09	4,45		0,25	0,24	1,97	0,55	0,98	1,50	lb 5,23		

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED





## GE2 DIN 2353 LIGHT SERIES

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	ØM	ØK*	W*	X*	SW	ØLW	ØRA	WEIGHT	ITEM CODE		
			MPa	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	kg	lb			
GE2 6L	6	MPa 50 Psi 7250	35	14,5	76	42,4	11	49	30	110	87	M12x1,5	5,25	4,5	34	9	6	6	kg 0,475	lb 1,05	GE2DDL05011A000	GE2DDL05044A000
GE2 8L	6	MPa 50 Psi 7250	35	14,5	76	42,4	11	49	30	110	87	M14x1,5	5,25	4,5	34	9	6	8	kg 0,477	lb 1,05	GE2DDL15011A000	GE2DDL15044A000
GE2 10L	6	MPa 50 Psi 7250	35	14,5	76	42,4	11	49	30	110	87	M16x1,5	5,25	4,5	34	9	6	10	kg 0,475	lb 1,05	GE2DDRL5011A000	GE2DDRL5044A000
GE2 10L	10	MPa 50 Psi 7250	40	17,4	76,5	44,4	11	54,25	35	110	93	M16x1,5	5,25	4,5	34	9	8	10	kg 0,597	lb 1,32	GE2DDL25011A000	GE2DDL25044A000
GE2 12L	10	MPa 50 Psi 7250	40	17,4	79,5	44,4	11	54,25	35	110	93	M18x1,5	5,25	4,5	34	9	10	12	kg 0,616	lb 1,36	GE2DDL35011A000	GE2DDL35044A000
GE2 15L	13	MPa 50 Psi 7250	43	19,7	87	48,4	11	57	37	110	97	M22x1,5	5,25	5	36	9	13	15	kg 0,731	lb 1,61	GE2DDL45011A000	GE2DDL45044A000
GE2 18L	13	MPa 50 Psi 7250	43	19,7	87	48,4	11	57	37	110	97	M26x1,5	5,25	5	36	9	13	18	kg 0,748	lb 1,65	GE2DDL55011A000	GE2DDL55044A000
GE2 22L	20	MPa 40 Psi 5800	57	25,4	110	62,5	14	75,5	49	180	105	M30x2	6,25	6	50	14	20	22	kg 1,463	lb 3,23	GE2DDL64011A000	GE2DDL64044A000
GE2 28L	25	MPa 35 Psi 5075	65	29,5	117	66,5	14	83,5	55	180	113	M36x2	6,25	6	50	14	25	28	kg 2,131	lb 4,70	GE2DDL73011A000	GE2DDL73044A000
GE2 35L	25	MPa 35 Psi 5075	65	29,5	119	66,5	14	83,5	55	180	113	M45x2	6,25	6	50	14	25	35	kg 2,163	lb 4,77	GE2DDL83011A000	GE2DDL83044A000
GE2 42L	25	MPa 35 Psi 5075	65	29,5	119	66,5	14	83,5	55	180	113	M52x2	6,25	6	50	14	25	42	kg 2,256	lb 4,97	GE2DDL93011A000	GE2DDL93044A000

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED

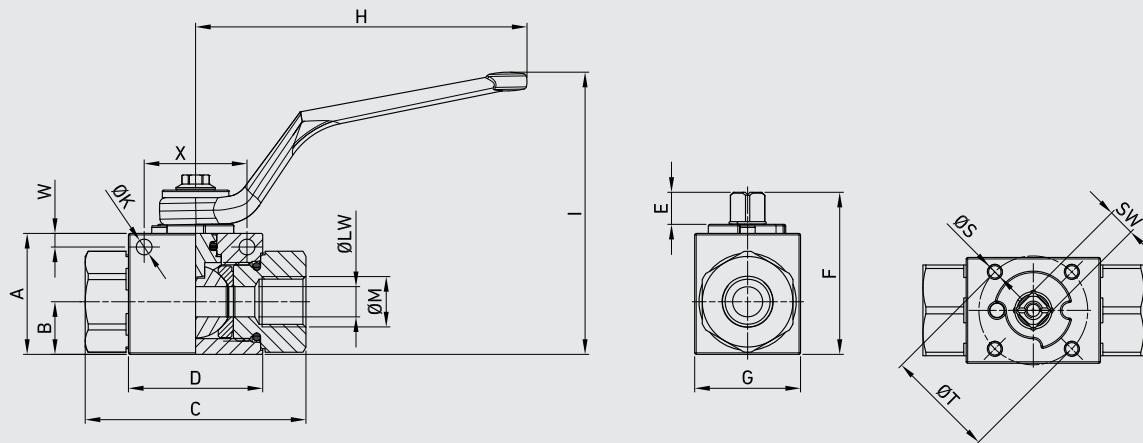


## GE2 DIN/ISO 228 BSP

Assembling threads per ISO5211

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	ØM	ØS	ØT	ØK*	W	X*	ISO5211	SW	ØLW	WEIGHT	ITEM CODE		
																						Carbon Steel	Stainless Steel	
GE2 G 1/4	6	MPa 50	mm 35	14,5	71	42,4	11	49	30	110	87	G	M4	35	5,25	4,5	34	F03	9	6	kg 0,49	GE2GGT15011AF50	GE2GGT15044AF50	
		Psi 7250	inch 1,38	0,57	2,80	1,67	0,43	1,93	1,18	4,33	3,43	1/4		1,38	0,21	0,18	1,34		0,35	0,24	lb 1,08			
GE2 G 3/8	10	MPa 50	mm 40	17,4	73	44,4	11	54,25	35	110	93	G	M5	36	5,25	4,5	34	F03	9	10	kg 0,644	GE2GGT25011AF50	GE2GGT25044AF50	
		Psi 7250	inch 1,57	0,69	2,87	1,75	0,43	2,14	1,38	4,33	3,66	3/8		1,42	0,21	0,18	1,34		0,35	0,39	lb 1,42			
GE2 G 1/2	13	MPa 50	mm 43	19,7	83	48,4	11	57	37	110	97	G	M5	36	5,25	5	36	F03	9	13	kg 0,757	GE2GGT35011AF50	GE2GGT35044AF50	
		Psi 7250	inch 1,69	0,78	3,27	1,91	0,43	2,24	1,46	4,33	3,82	1/2		1,42	0,21	0,20	1,42		0,35	0,51	lb 1,67			
GE2 G 3/4	20	MPa 42	mm 57	25,4	95	62,5	14	75,5	49	180	105	G	M6	50	6,25	6	50	F05	14	20	kg 1,438	GE2GGT44011AF50	GE2GGT44044AF50	
		Psi 6090	inch 2,24	1,00	3,74	2,46	0,55	2,97	1,93	7,09	4,13	3/4		1,97	0,25	0,24	1,97		0,55	0,79	lb 3,17			
GE2 G 1	25	MPa 42	mm 65	29,5	112	66,5	14	83,5	55	180	113	G 1	M6	50	6,25	6	50	F05	14	25	kg 2,223	GE2GGT53011AF50	GE2GGT53044AF50	
		Psi 6090	inch 2,56	1,16	4,41	2,62	0,55	3,29	2,17	7,09	4,45			1,97	0,25	0,24	1,97		0,55	0,98	lb 4,90			
GE2 G 1 1/4 R	25	MPa 42	mm 65	29,5	120	66,5	14	83,5	55	180	113	G 1	M6	50	6,25	6	50	F05	14	25	kg 2,273	GE2GGR63011AF50	GE2GGR63044AF50	
		Psi 6090	inch 2,56	1,16	4,72	2,62	0,55	3,29	2,17	7,09	4,45	1/4		1,97	0,25	0,24	1,97		0,55	0,98	lb 5,01			
GE2 G 1 1/2 R	25	MPa 42	mm 65	29,5	124	66,5	14	83,5	55	180	113	G 1	M6	50	6,25	6	50	F05	14	25	kg 2,386	GE2GGR73011AF50	GE2GGR73044AF50	
		Psi 6090	inch 2,56	1,16	4,88	2,62	0,55	3,29	2,17	7,09	4,45	1/2		1,97	0,25	0,24	1,97		0,55	0,98	lb 5,26			

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED




## GE2 ANSI/ASME B1.20.1 NPT

Assembling threads per ISO5211

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	ØM	ØS	ØT	ØK*	W*	X*	ISO5211	SW	ØLW	WEIGHT	ITEM CODE	
																					CS	SS	
GE2 N 1/4	6	MPa 50 Psi 7250	mm 35 14,5 71 42,4 11 49 30 110 87 inch 1,38 0,57 2,80 1,67 0,44 1,93 1,18 4,33 3,43	N	M4	35 5,25 4,5 34 1,38 0,21 0,18 1,34	F03	9 6 0,35 0,24	kg 0,49 lb 1,08	GE2NNT15011AF50	GE2NNT15044AF50												
GE2 N 3/8	10	MPa 50 Psi 7250	mm 40 17,4 73 44,4 11 54,25 35 110 93 inch 1,57 0,69 2,87 1,75 0,43 2,14 1,38 4,33 3,66	N	M5	36 5,25 4,5 34 1,42 0,21 0,18 1,34	F03	9 10 0,35 0,39	kg 0,644 lb 1,42	GE2NNT25011AF50	GE2NNT25044AF50												
GE2 N 1/2	13	MPa 50 Psi 7250	mm 43 19,7 83 48,4 11 57 37 110 97 inch 1,69 0,78 3,27 1,91 0,43 2,24 1,46 4,33 3,82	N	M5	36 5,25 5 36 1,42 0,21 0,20 1,42	F03	9 13 0,35 0,51	kg 0,757 lb 1,67	GE2NNT35011AF50	GE2NNT35044AF50												
GE2 N 3/4	20	MPa 42 Psi 6090	mm 57 25,4 95 62,5 14 75,5 49 180 105 inch 2,24 1,00 3,74 2,46 0,55 2,97 1,93 7,09 4,13	N	M6	50 6,25 6 50 1,97 0,25 0,24 1,97	F05	14 20 0,55 0,79	kg 1,438 lb 3,17	GE2NNT44011AF50	GE2NNT44044AF50												
GE2 N 1	25	MPa 42 Psi 6090	mm 65 29,5 112 66,5 14 83,5 55 180 113 inch 2,56 1,16 4,41 2,62 0,55 3,29 2,17 7,09 4,45	N	M6	50 6,25 6 50 1,97 0,25 0,24 1,97	F05	14 25 0,55 0,98	kg 2,223 lb 4,90	GE2NNT53011AF50	GE2NNT53044AF50												
GE2 N 1 1/4 R	25	MPa 42 Psi 6090	mm 65 29,5 120 66,5 14 83,5 55 180 113 inch 2,56 1,16 4,72 2,62 0,55 3,29 2,17 7,09 4,45	N	M6	50 6,25 6 50 1,97 0,25 0,24 1,97	F05	14 25 0,55 0,98	kg 2,273 lb 5,01	GE2NNR63011AF50	GE2NNR63044AF50												
GE2 N 1 1/2 R	25	MPa 42 Psi 6090	mm 65 29,5 124 66,5 14 83,5 55 180 113 inch 2,56 1,16 4,88 2,62 0,55 3,29 2,17 7,09 4,45	N	M6	50 6,25 6 50 1,97 0,25 0,24 1,97	F05	14 25 0,55 0,98	kg 2,386 lb 5,26	GE2NNR73011AF50	GE2NNR73044AF50												

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED



## GE2 SAE J1926-1

Assembling threads per ISO5211

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	ØM	ØS	ØT	ØK*	W*	X*	ISO5211	SW	ØLW	WEIGHT	ITEM CODE	
																					CS	SS	
GE2 SAE4	6	MPa 50 Psi 7250	mm 35 14,5 71 42,4 11,1 49 30 110 87 inch 1,38 0,57 2,80 1,67 0,44 1,93 1,18 4,33 3,43	7/16	M4	35 0,21 0,18 1,34 1,38 5,25 4,5 34	F03	9 6 0,35 0,24	kg 0,512 lb 1,13	GE2EEE05011AF50	GE2EEE05044AF50												
GE2 SAE6	10	MPa 50 Psi 7250	mm 40 17,5 73 44,8 11,1 54,25 35 110 93 inch 1,57 0,69 2,87 1,76 0,44 2,14 1,38 4,33 3,66	9/16	M4	35 0,21 0,18 1,34 1,38 5,25 5 36	F03	9 10 0,35 0,39	kg 0,5 lb 1,10	GE1EEE15011AF50	GE1EEE15044AF50												
GE2 SAE8	13	MPa 50 Psi 7250	mm 43 19,7 83 48,4 11,1 57,25 37 110 97 inch 1,69 0,78 3,27 1,91 0,44 2,25 1,46 4,33 3,82	3/4	M5	36 0,21 0,20 1,42 1,42 6,25 6 50	F03	9 13 0,35 0,51	kg 0,779 lb 1,72	GE1EEE25011AF50	GE1EEE25044AF50												
GE2 SAE12	20	MPa 50 Psi 7250	mm 57 25,4 95 62,5 14,35 75,5 49 180 105 inch 2,24 1,00 3,74 2,46 0,56 2,97 1,93 7,09 4,13	1 1/16	M5	36 0,25 0,24 1,97 1,42 6,25 6 50	F05	9 20 0,35 0,79	kg 1,441 lb 3,18	GE2EEE34011AF50	GE2EEE34044AF50												
GE2 SAE16	25	MPa 42 Psi 6090	mm 65 29,5 112,4 66,5 14,35 83,5 55 180 113 inch 2,56 1,16 4,43 2,62 0,56 3,29 2,17 7,09 4,45	1 5/16	M6	50 0,25 0,24 1,97 1,97 6,25 6 50	F05	9 25 0,35 0,98	kg 2,335 lb 5,15	GE2EEE43011AF50	GE2EEE43044AF50												
GE2 SAE20R	25	MPa 42 Psi 6090	mm 65 29,5 120,4 66,5 14,35 83,5 55 180 113 inch 2,56 1,16 4,74 2,62 0,56 3,29 2,17 7,09 4,45	1 5/8	M6	50 0,25 0,24 1,97 1,97 6,25 6 50	F05	9 25 0,35 0,98	kg 2,307 lb 5,09	GE2EEE53011AF50	GE2EEE53044AF50												
GE2 SAE24R	25	MPa 42 Psi 6090	mm 65 29,5 124,4 66,5 14,35 83,5 55 180 113 inch 2,56 1,16 4,90 2,62 0,56 3,29 2,17 7,09 4,45	1 7/8	M6	50 0,25 0,24 1,97 1,97 6,25 6 50	F05	9 25 0,35 0,98	kg 2,399 lb 5,29	GE2EEE63011AF50	GE2EEE63044AF50												

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED



# GE2 HC High Cyclicity

2-WAY HIGH PRESSURE  
BALL VALVES

**1.000.000 CYCLES**

Edition. 21.0


## CS Carbon Steel

- Type: ball valve 2 way high cycles
- Sizes: from DN6 up to DN32
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

## SS Stainless Steel

- Type: ball valve 2 way high cycles
- Sizes: from DN6 up to DN32
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -30°C to +100°C

## STANDARD COMPOSITION OF VALVE

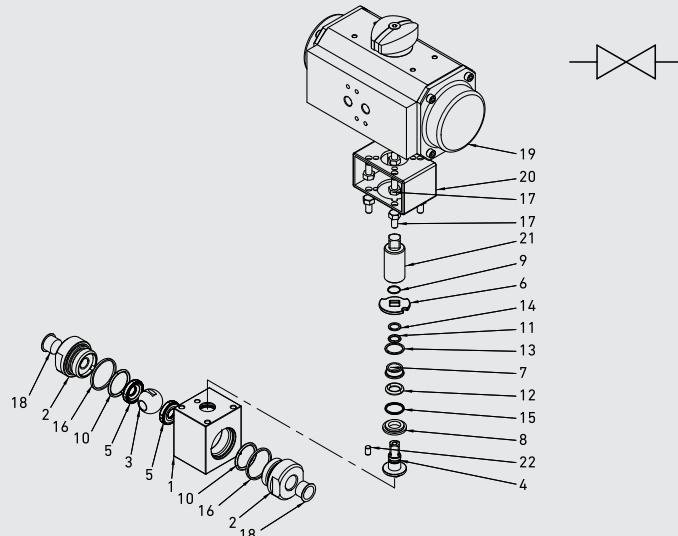

POS	DESCRIPTION	Q.TY DN10-13		Q.TY DN20-25-32		MATERIAL	POS	DESCRIPTION	Q.TY DN10-13		Q.TY DN20-25-32		MATERIAL
		CS	SS	CS	SS				CS	SS	CS	SS	
1	Body	1	1	1,0737	1,4404		12	Stem o-ring	1	/	NBR	NBR	
2	Adapter	2	2	1,0460	1,4404		13	Stem Back-up	1	1	PTFE	PTFE	
3	Ball	1	1	1,4404	1,4404		14	Stem Back-up	1	/	PTFE	PTFE	
4	Stem	1	1	1,4542	1,4542		15	Stem quad-ring	1	1	NBR	NBR	
5	Ball seat	2	2	POM	POM		16	Closure gasket	2	2	GRAPHITE	GRAPHITE	
6	Washer	1	1	1,0116	1,0116		17	Screws	8	8	ISO 4017 8.8	ISO 4017 8.8	
7	Upper Bushing	1	1	POM - A1000	POM - A1000		18	Caps	2	2	PVC	PVC	
8	Lower Bushing	1	1	POM - A1000	POM - A1000		19	Actuator	1	1	N/A	N/A	
9	Seeger	1	1	1,4301	1,4301		20	Connector	1	1	1,0737	1,0737	
10	Adapter o-ring	2	2	NBR	NBR		21	Joint	1	1	1,0737	1,0737	
11	Stem o-ring	1	1	NBR	NBR		22	Pin	1	1	1,0737	1,4404	



**STANDARD DESIGN: BARE STEM  
WITH ACTUATOR HOLES**

## CODE DESCRIPTION STRUCTURE

GE2 HC	G 1/2	DN13	1	2	M	4	A	B
--------	-------	------	---	---	---	---	---	---

Type and way of valve \_\_\_\_\_

GE2 HC 2-way

Ends \_\_\_\_\_

GAS DIN/ ISO 228/ BSP	NPT ANSI / ASME	SAE
	/ ASME	J1926-1
BSP	B1.20.1	
G 1/4	N 1/4	SAE4
G 3/8	N 3/8	SAE6
G 1/2	N 1/2	SAE8
G 3/4	N 3/4	SAE12
G 1	N 1	SAE16
G 1 1/4	N 1 1/4	SAE20

Size \_\_\_\_\_

from DN6 to DN32

Body Material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 2 = 1,0460
- 4 = 1,4404

Stem material \_\_\_\_\_

- M = 1,4542
- M = 1,4542

Ball Material \_\_\_\_\_

- 4 = 1,4404
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*

Seal material \_\_\_\_\_



B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Pneumatic and electrical actuator


For further special requests please consult our technical/commercial service.

**STANDARD DESIGN: BARE STEM WITH ACTUATOR HOLES**

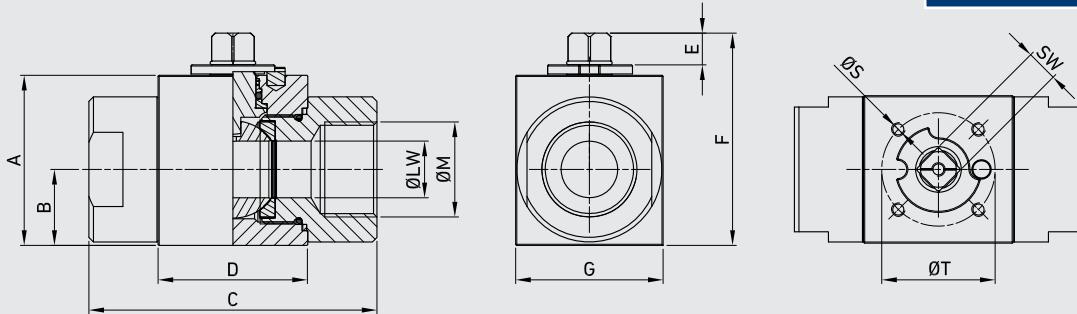


### GE2 HC DIN/ISO 228 BSP

TYPE	DN	PN	A	B	C	D	E	F	G	ØM	ØS	ØT	ISO5211	SW	ØLW	WEIGHT	ITEM CODE	
			mm	inch	mm	inch	mm	inch	mm	mm	inch	mm	inch	kg	lb	CS	SS	
GE2 G 1/4	6	MPa 50	57	24,5	73	44	11	71,3	49	G 1/4	M6	50 1,97	F05	9	10	0,505	G590202A1301TAA	G590202A2P01TAA
		Psi 7250	2,24	0,96	2,87	1,73	0,43	2,81	1,93					0,35	0,39	1,11		
GE2 G 3/8	10	MPa 50	57	24,5	73	44	11	71,3	49	G 3/8	M6	50 1,97	F05	9	10	0,744	G590203A1301TAA	G590203A2P01TAA
		Psi 7250	2,24	0,96	2,87	1,73	0,43	2,81	1,93					0,35	0,39	1,64		
GE2 G 1/2	13	MPa 50	57	23,5	81	48	11	71,3	49	G 1/2	M6	50 1,97	F05	9	13	1,238	G590204A1301TAA	G590204A2P01TAA
		Psi 7250	2,24	0,93	3,19	1,89	0,43	2,81	1,93					0,35	0,51	2,73		
GE2 G 3/4	20	MPa 40	65	27	98	62	14	83,7	55	G 3/4	M6	50 1,97	F05	14	20	1,818	G590205A1301RAA	G590205A2P01RAA
		Psi 5800	2,56	1,06	3,86	2,44	0,55	3,30	2,17					0,55	0,79	4,01		
GE2 G 1	25	MPa 35	75	33,5	106	66	14	93,6	65	G 1	M6	50 1,97	F05	14	25	2,323	G590206A1301PAA	G590206A2P01PAA
		Psi 5075	2,95	1,32	4,17	2,60	0,55	3,69	2,56					0,55	0,98	5,12		
GE2 G 1 1/4 R	25	MPa 35	75	33,5	127	66	14	93,6	65	G 1/4	M6	50 1,97	F05	14	25	2,573	G590207R1301PAA	G590207R2P01PAA
		Psi 5075	2,95	1,32	5,00	2,60	0,55	3,69	2,56					0,55	0,98	5,67		
GE2 G 1 1/4	32	MPa 35	87	40,75	127	83	14	93,6	80	G 1/4	M8	70 2,76	F07	14	32	2,890	G590207A1301PAA	G590207A2P01PAA
		Psi 5075	3,43	1,60	5,00	3,27	0,55	3,69	3,15					0,55	1,26	6,37		





### GE2 HC ANSI/ASME B1.20.1 NPT

TYPE	DN	PN		A	B	C	D	E	F	G	ØM	ØS	ØT	ISO5211	SW	ØLW	WEIGHT	ITEM CODE	
																		CS	SS
GE2 G 1/4	6	MPa 50 Psi 7250	mm 57 inch 2,24	24,5	73	44	11	71,3	49	N 1/4	M6	50 1,97	F05	9 0,35	10 0,39	kg 0,505 lb 1,11	G590902A1301TAA	G590902A2P01TAA	
GE2 G 3/8	10	MPa 50 Psi 7250	mm 57 inch 2,24	24,5	73	44	11	71,3	49	N 3/8	M6	50 1,97	F05	9 0,35	10 0,39	kg 0,744 lb 1,64	G590903A1301TAA	G590903A2P01TAA	
GE2 G 1/2	13	MPa 50 Psi 7250	mm 57 inch 2,24	23,5	81	48	11	71,3	49	N 1/2	M6	50 1,97	F05	9 0,35	13 0,51	kg 1,238 lb 2,73	G590904A1301TAA	G590904A2P01TAA	
GE2 G 3/4	20	MPa 40 Psi 5800	mm 65 inch 2,56	27	98	62	14	83,7	55	N 3/4	M6	50 1,97	F05	14 0,55	20 0,79	kg 1,818 lb 4,01	G590905A1301RAA	G590905A2P01RAA	
GE2 G 1	25	MPa 35 Psi 5075	mm 75 inch 2,95	33,5	106	66	14	93,6	65	N 1	M6	50 1,97	F05	14 0,55	25 0,98	kg 2,323 lb 5,12	G590906A1301PAA	G590906A2P01PAA	
GE2 G 1 1/4 R	25	MPa 35 Psi 5075	mm 75 inch 2,95	33,5	127	66	14	93,6	65	N 1/4	M6	50 1,97	F05	14 0,55	25 0,98	kg 2,573 lb 5,67	G590907R1301PAA	G590907R2P01PAA	
GE2 G 1 1/4	32	MPa 35 Psi 5075	mm 87 inch 3,43	40,75	127	83	14	93,6	80	N 1/4	M8	70 2,76	F07	14 0,55	32 1,26	kg 2,890 lb 6,37	G590907A1301PAA	G590907A2P01PAA	





### GE2 HC SAE J1926-1

TYPE	DN	PN		A	B	C	D	E	F	G	ØM	ØS	ØT	ISO5211	SW	ØLW	WEIGHT	ITEM CODE	
																		CS	SS
GE2 G 1/4	6	MPa 50 Psi 7250	mm 57 inch 2,24	24,5	73	44	11	71,3	49	7/16	M6	50 1,97	F05	9 0,35	10 0,39	kg 0,505 lb 1,11	G590B02A1301TAA	G590B02A2P01TAA	
GE2 G 3/8	10	MPa 50 Psi 7250	mm 57 inch 2,24	24,5	73	44	11	71,3	49	9/16	M6	50 1,97	F05	9 0,35	10 0,39	kg 0,744 lb 1,64	G590B03A1301TAA	G590B03A2P01TAA	
GE2 G 1/2	13	MPa 50 Psi 7250	mm 57 inch 2,24	23,5	81	48	11	71,3	49	3/4	M6	50 1,97	F05	9 0,35	13 0,51	kg 1,238 lb 2,73	G590B04A1301TAA	G590B04A2P01TAA	
GE2 G 3/4	20	MPa 40 Psi 5800	mm 65 inch 2,56	27	98	62	14	83,7	55	1 1/16	M6	50 1,97	F05	14 0,55	20 0,79	kg 1,818 lb 4,01	G590B05A1301RAA	G590B05A2P01RAA	
GE2 G 1	25	MPa 35 Psi 5075	mm 75 inch 2,95	33,5	106	66	14	93,6	65	1 5/16	M6	50 1,97	F05	14 0,55	25 0,98	kg 2,323 lb 5,12	G590B06A1301PAA	G590B06A2P01PAA	
GE2 G 1 1/4 R	25	MPa 35 Psi 5075	mm 75 inch 2,95	33,5	127	66	14	93,6	65	1 5/8	M6	50 1,97	F05	14 0,55	25 0,98	kg 2,573 lb 5,67	G590B07R1301PAA	G590B07R2P01PAA	
GE2 G 1 1/4	32	MPa 35 Psi 5075	mm 87 inch 3,43	40,75	127	83	14	93,6	80	1 5/8	M8	70 2,76	F07	14 0,55	32 1,26	kg 2,890 lb 6,37	G590B07A1301PAA	G590B07A2P01PAA	

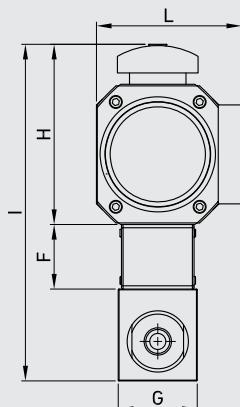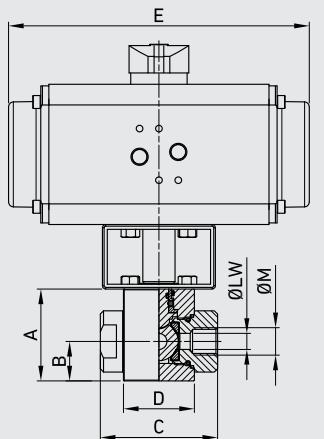


CUSTOMIZED VALVES WITH  
SELECTED ACTUATORS



## GE2 HC DIN/ISO 228 BSP

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	L	ØM	ØS	ØT	ISO5211	SW	ØLW	WEIGHT
GE2 G 1/4	6	MPa 50	mm 57	24,5	73	44	187	40	49	112	209	90	G 1/4	M6	50	F05	9	10	kg 1,11
		Psi 7250	inch 2,24	0,96	2,87	1,73	7,36	1,57	1,93	4,41	8,23	3,54			1,97	0,35	0,39	lb 2,45	
GE2 G 3/8	10	MPa 50	mm 57	24,5	73	44	187	40	49	112	209	90	G 3/8	M6	50	F05	9	10	kg 1,060
		Psi 7250	inch 2,24	0,96	2,87	1,73	7,36	1,57	1,93	4,41	8,23	3,54			1,97	0,35	0,39	lb 2,34	
GE2 G 1/2	13	MPa 50	mm 57	23,5	81	48	187	40	49	112	209	90	G 1/2	M6	50	F05	9	13	kg 1,187
		Psi 7250	inch 2,24	0,93	3,19	1,89	7,36	1,57	1,93	4,41	8,23	3,54			1,97	0,35	0,51	lb 2,62	
GE2 G 3/4	20	MPa 40	mm 65	27	98	62	206	40	55	143	248	113	G 3/4	M6	50	F05	14	20	kg 1,935
		Psi 5800	inch 2,56	1,06	3,86	2,44	8,11	1,57	2,17	5,63	9,76	4,45			1,97	0,55	0,79	lb 4,27	
GE2 G 1	25	MPa 35	mm 75	33,5	106	66	206	40	65	143	258	113	G 1	M6	50	F05	14	25	kg 2,787
		Psi 5075	inch 2,95	1,32	4,17	2,60	8,11	1,57	2,56	5,63	10,16	4,45			1,97	0,55	0,98	lb 6,14	
GE2 G 1 1/4 R	25	MPa 35	mm 75	33,5	127	66	206	40	65	143	258	113	G 1/4	M6	50	F05	14	25	kg 4,768
		Psi 5075	inch 2,95	1,32	5,00	2,60	8,11	1,57	2,56	5,63	10,16	4,45			1,97	0,55	0,98	lb 10,51	
GE2 G 1 1/4	32	MPa 35	mm 87	40,75	127	83	218	40	80	165	292	136,7	G 1/4	M8	70	F07	14	32	kg 4,933
		Psi 5075	inch 3,43	1,60	5,00	3,27	8,58	1,57	3,15	6,50	11,50	5,38			2,76	0,55	1,26	lb 10,88	


Customized valves with selected actuators



## GE2 HC ANSI/ASME B1.20.1 NPT

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	L	ØM	ØS	ØT	ISO5211	SW	ØLW	WEIGHT
GE2 N 1/4	6	MPa 50 Psi 7250	mm 57 inch 2,24	24,5 0,96	73 2,87	44 1,73	187 7,36	40 1,57	49 1,93	112 4,41	209 8,23	90 3,54	N 1/4	M6	50 1,97	F05	9 0,35	10 0,39	kg 1,11 lb 2,45
GE2 N 3/8	10	MPa 50 Psi 7250	mm 57 inch 2,24	24,5 0,96	73 2,87	44 1,73	187 7,36	40 1,57	49 1,93	112 4,41	209 8,23	90 3,54	N 3/8	M6	50 1,97	F05	9 0,35	10 0,39	kg 1,210 lb 2,67
GE2 N 1/2	13	MPa 50 Psi 7250	mm 57 inch 2,24	23,5 0,93	81 3,19	48 1,89	187 7,36	40 1,57	49 1,93	112 4,41	209 8,23	90 3,54	N 1/2	M6	50 1,97	F05	9 0,35	13 0,51	kg 1,184 lb 2,61
GE2 N 3/4	20	MPa 40 Psi 5800	mm 65 inch 2,56	27 1,06	98 3,86	62 2,44	206 8,11	40 1,57	55 2,17	143 5,63	248 9,76	113 4,45	N 3/4	M6	50 1,97	F05	14 0,55	20 0,79	kg 2,04 lb 4,50
GE2 N 1	25	MPa 35 Psi 5075	mm 75 inch 2,95	33,5 1,32	106 4,17	66 2,60	206 8,11	40 1,57	65 2,56	143 5,63	258 10,16	113 4,45	N 1	M6	50 1,97	F05	14 0,55	25 0,98	kg 3,08 lb 6,79
GE2 N 1 1/4 R	25	MPa 35 Psi 5075	mm 75 inch 2,95	33,5 1,32	127 5,00	66 2,60	206 8,11	40 1,57	65 2,56	143 5,63	258 10,16	113 4,45	N 1/4	M6	50 1,97	F05	14 0,55	25 0,98	kg 3,08 lb 6,79
GE2 N 1 1/4	32	MPa 35 Psi 5075	mm 87 inch 3,43	40,75 1,60	127 5,00	83 3,27	218 8,58	40 1,57	80 3,15	165 6,50	292 11,50	136,7 5,38	N 1/4	M8	70 2,76	F07	14 0,55	32 1,26	kg 4,933 lb 10,88

Customized valves with selected actuators



## GE2 HC SAE J1926-1

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	L	ØM	ØS	ØT	ISO5211	SW	ØLW	WEIGHT
GE2 SAE4	6	MPa 50 Psi 7250	mm 57 inch 2,24	24,5 0,96	73 2,87	44 1,73	187 7,36	40 1,57	49 1,93	112 4,41	209 8,23	90 3,54	7/16	M6	50 1,97	F05	9 0,35	10 0,39	kg 1,11 lb 2,45
GE2 SAE6	10	MPa 50 Psi 7250	mm 57 inch 2,24	24,5 0,96	73 2,87	44 1,73	187 7,36	40 1,57	49 1,93	112 4,41	209 8,23	90 3,54	9/16	M6	50 1,97	F05	9 0,35	10 0,39	kg 1,210 lb 2,67
GE2 SAE8	13	MPa 50 Psi 7250	mm 57 inch 2,24	23,5 0,93	81 3,19	48 1,89	187 7,36	40 1,57	49 1,93	112 4,41	209 8,23	90 3,54	3/4 UNF	M6	50 1,97	F05	9 0,35	13 0,51	kg 1,187 lb 2,62
GE2 SAE12	20	MPa 40 Psi 5800	mm 65 inch 2,56	27 1,06	98 3,86	62 2,44	206 8,11	40 1,57	55 2,17	143 5,63	248 9,76	113 4,45	1 1/16	M6	50 1,97	F05	14 0,55	20 0,79	kg 1,935 lb 4,27
GE2 SAE16	25	MPa 35 Psi 5075	mm 75 inch 2,95	33,5 1,32	106 4,17	66 2,60	206 8,11	40 1,57	65 2,56	143 5,63	258 10,16	113 4,45	1 5/16	M6	50 1,97	F05	14 0,55	25 0,98	kg 2,787 lb 6,14
GE2 SAE20R	25	MPa 35 Psi 5075	mm 75 inch 2,95	33,5 1,32	127 5,00	66 2,60	206 8,11	40 1,57	65 2,56	143 5,63	258 10,16	113 4,45	1 5/8	M6	50 1,97	F05	14 0,55	25 0,98	kg 4,768 lb 10,51
GE2 SAE20	32	MPa 35 Psi 5075	mm 87 inch 3,43	40,75 1,60	127 5,00	83 3,27	218 8,58	40 1,57	80 3,15	165 6,50	292 11,50	136,7 5,38	1 5/8	M8	70 2,76	F07	14 0,55	32 1,26	kg 4,934 lb 10,88

Customized valves with selected actuators





GE2 HC H<sub>2</sub>

## HYDRAULIC VALVES




## SS Stainless Steel

- Type: ball valve 2 way high cycle
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE
- Pressure: up to PN1000

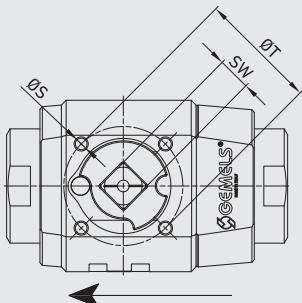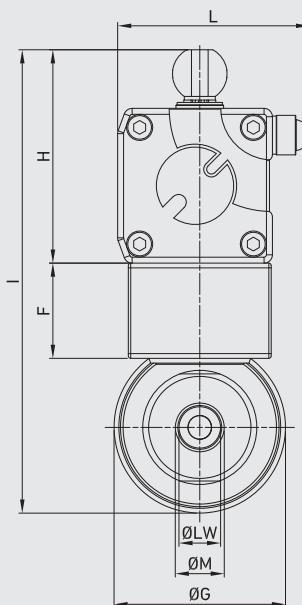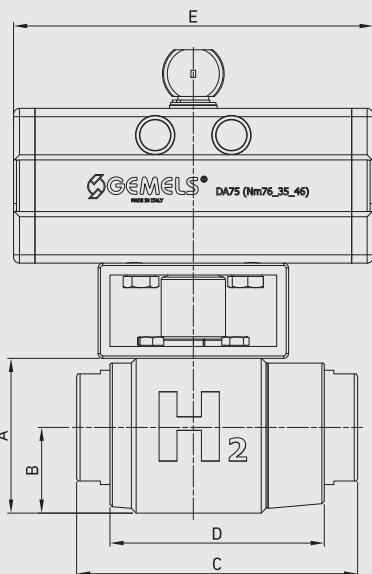
GE2 HC H<sub>2</sub> DIN/ISO 228 BSP

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	ØM	ØS	ØT	ISO5211	SW	ØLW
GE H2	6	MPa 100	mm 65	36	118	90	151	40	72	90	195	G 1/4	M6	70	F07	14	10
		Psi 14500	inch 2,56	1,42	4,65	3,54	5,94	1,57	2,83	3,54	7,68			2,76		0,55	0,39
GE H2	10	MPa 100	mm 65	36	118	90	151	40	72	90	195	G 3/8	M6	70	F07	14	10
		Psi 14500	inch 2,56	1,42	4,65	3,54	5,94	1,57	2,83	3,54	7,68			2,76		0,55	0,39
GE H2	13	MPa 100	mm 65	36	118	90	151	40	72	90	195	G 1/2	M6	70	F07	14	10
		Psi 14500	inch 2,56	1,42	4,65	3,54	5,94	1,57	2,83	3,54	7,68			2,76		0,55	0,39
GE H2	20	MPa 100	mm 65	36	118	90	151	40	72	90	195	G 3/4	M6	70	F07	14	10
		Psi 14500	inch 2,56	1,42	4,65	3,54	5,94	1,57	2,83	3,54	7,68			2,76		0,55	0,39
GE H2	25	MPa 100	mm 65	36	118	90	151	40	72	90	195	G 1	M6	70	F07	14	10
		Psi 14500	inch 2,56	1,42	4,65	3,54	5,94	1,57	2,83	3,54	7,68			2,76		0,55	0,39



## ■ GE2 HC H<sub>2</sub> ANSI/ASME B1.20.1 NPT

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	ØM	ØS	ØT	ISO5211	SW	ØLW
GE H2	6	MPa 100	mm 65	36	118	90	151	40	72	90	195	N 1/4	M6	70	F07	14	10
		Psi 14500	inch 2,56	1,42	4,65	3,54	5,94	1,57	2,83	3,54	7,68			2,76		0,55	0,39
GE H2	10	MPa 100	mm 65	36	118	90	151	40	72	90	195	N 3/8	M6	70	F07	14	10
		Psi 14500	inch 2,56	1,42	4,65	3,54	5,94	1,57	2,83	3,54	7,68			2,76		0,55	0,39
GE H2	13	MPa 100	mm 65	36	118	90	151	40	72	90	195	N 1/2	M6	70	F07	14	10
		Psi 14500	inch 2,56	1,42	4,65	3,54	5,94	1,57	2,83	3,54	7,68			2,76		0,55	0,39
GE H2	20	MPa 100	mm 65	36	118	90	151	40	72	90	195	N 3/4	M6	70	F07	14	10
		Psi 14500	inch 2,56	1,42	4,65	3,54	5,94	1,57	2,83	3,54	7,68			2,76		0,55	0,39
GE H2	25	MPa 100	mm 65	36	118	90	151	40	72	90	195	N 1	M6	70	F07	14	10
		Psi 14500	inch 2,56	1,42	4,65	3,54	5,94	1,57	2,83	3,54	7,68			2,76		0,55	0,39



## ■ GE2 HC H<sub>2</sub> SAE J1926-1

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	ØM	ØS	ØT	ISO5211	SW	ØLW
GE2 SAE4	6	MPa 100	mm 65	36	118	90	151	40	72	90	195	7/16	M6	70	F07	14	10
		Psi 14500	inch 2,56	1,42	4,65	3,54	5,94	1,57	2,83	3,54	7,68			2,76		0,55	0,39
GE2 SAE6	10	MPa 100	mm 65	36	118	90	151	40	72	90	195	9/16	M6	70	F07	14	10
		Psi 14500	inch 2,56	1,42	4,65	3,54	5,94	1,57	2,83	3,54	7,68			2,76		0,55	0,39
GE2 SAE8	13	MPa 100	mm 65	36	118	90	151	40	72	90	195	3/4	M6	70	F07	14	10
		Psi 14500	inch 2,56	1,42	4,65	3,54	5,94	1,57	2,83	3,54	7,68			2,76		0,55	0,39
GE2 SAE12	20	MPa 100	mm 65	36	118	90	151	40	72	90	195	1 1/16	M6	70	F07	14	10
		Psi 14500	inch 2,56	1,42	4,65	3,54	5,94	1,57	2,83	3,54	7,68			2,76		0,55	0,39
GE2 SAE16	25	MPa 100	mm 65	36	118	90	151	40	72	90	195	1 5/16	M6	70	F07	14	10
		Psi 14500	inch 2,56	1,42	4,65	3,54	5,94	1,57	2,83	3,54	7,68			2,76		0,55	0,39



# GE3

## 3-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0



### CS Carbon Steel

- Type: ball valve 3 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE-DIN
- Pressure: up to PN500
- Temp range: from -20°C to +100°C


### SS Stainless Steel

- Type: ball valve 3 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE-DIN
- Pressure: up to PN500
- Temp range: from -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

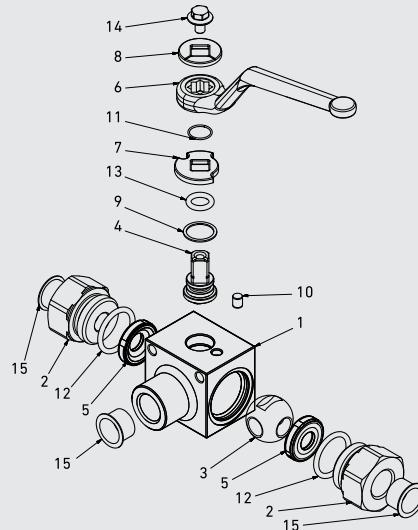

**WARNING!**  
Pressure inlet only  
from center port 1



POS	DESCRIPTION	Q.TY	CS	SS
			Carbon Steel	MATERIAL
1	Body	1		1,4404
2	Adapter	2		1,4404
3	Ball	1		1,4404
4	Stem	1		1,4404
5	Ball seat	2	POM	POM
6	Handle	1	ZINC	ZINC
7	Washer	1	1,0116	1,4301
8	Washer	1	1,0116	1,4301
9	Stem ring	1	POM	POM
10	Pin	1	1,0737	1,4301
11	Seeger	1	1,4301	1,4301
12	Adapter o-ring	2	NBR	NBR
13	Stem o-ring	1	NBR	NBR
14	Screw	1	Din 6921 8.8	Din 6921 A2
15	Caps	3	PVC	PVC



## CODE DESCRIPTION STRUCTURE

**GE3 G 1/2 DN13 1 1 1 1 A B**

Type and way of valve

GE3 3-way

Ends

GAS DIN/ ISO 228 BSP	NPT ANSI /ASME B1.20.1	SAE J1926-1	DIN 2353 HEAVY SERIES	DIN 2353 LIGHT SERIES					
G 1/4	N 1/4	SAE4	8S	6L					
G 3/8	N 3/8	SAE6	10S	8L					
G 1/2	N 1/2	SAE8	12S	10L					
G 3/4	N 3/4	SAE12	14S	12L					
G 1	N 1	SAE16	16S	15L					
G 1 1/4 R	N 1 1/4 R	SAE20R	20S	18L					
G 1 1/2 R	N 1 1/2 R	SAE24R	25S	22L					
			30S	28L					
			38S	35L					
				42L					

Size

from DN6 to DN25

Body Material

- 1 = 1,0737
- 4 = 1,4404

Adapter material

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Stem material

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Ball Material

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Seat material

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*



Seal material

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN40 MPa
- Pneumatic and electrical actuator
- Security block
- Locking device
- Fixing holes for SS valves

For further special requests please consult our technical/commercial service.

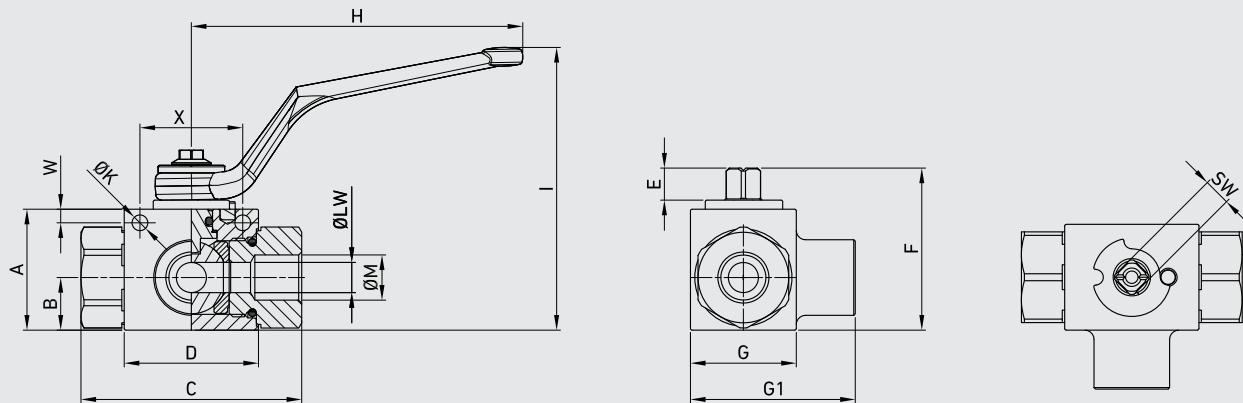


## GE3 DIN/ISO 228 BSP

TYPE	DN	PN	A	B	C	D	E	F	G	G1	H	I	ØM	ØK*	W*	X*	SW	ØLW	WEIGHT	ITEM CODE	
			mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	CS Carbon Steel	SS Stainless Steel	
GE3 G 1/4	6	MPa 50	35	14,5	71	42,4	11	49	30	48,5	110	87	G 1/4	5,25	4,5	34	9	6	kg 0,536	GE3GGT14011A000	GE3GGT14044A000
		Psi 7250	1,38	0,57	2,80	1,67	0,43	1,93	1,18	1,91	4,33	3,43		0,21	0,18	1,34	0,35	0,24	lb 1,18		
GE3 G 3/8	10	MPa 50	40	17,4	73	44,4	11	54,25	35	54,5	110	93	G 3/8	5,25	4,5	34	9	10	kg 0,695	GE3GGT24011A000	GE3GGT24044A000
		Psi 7250	1,57	0,69	2,87	1,75	0,43	2,14	1,38	2,15	4,33	3,66		0,21	0,18	1,34	0,35	0,39	lb 1,53		
GE3 G 1/2	13	MPa 50	43	19,7	83	48,4	11	57	37	58,5	110	97	G 1/2	5,25	5	36	9	13	kg 0,825	GE3GGT33011A000	GE3GGT33044A000
		Psi 7250	1,69	0,78	3,27	1,91	0,43	2,24	1,46	2,30	4,33	3,82		0,21	0,20	1,42	0,35	0,51	lb 1,82		
GE3 G 3/4	20	MPa 42	57	25,4	95	62,5	14	75,5	49	75	180	105	G 3/4	6,25	6	50	14	20	kg 1,583	GE3GGT44011A000	GE3GGT43044A000
		Psi 6090	2,24	1,00	3,74	2,46	0,55	2,97	1,93	2,95	7,09	4,13		0,25	0,24	1,97	0,55	0,79	lb 3,49		
GE3 G 1	25	MPa 42	65	29,5	112	66,5	14	83,5	55	89	180	113	G 1	6,25	6	50	14	25	kg 2,421	GE3GGT53011A000	GE3GGT53044A000
		Psi 6090	2,56	1,16	4,41	2,62	0,55	3,29	2,17	3,50	7,09	4,45		0,25	0,24	1,97	0,55	0,98	lb 5,34		
GE3 G 1 1/4 R	25	MPa 42	65	29,5	120	66,5	14	83,5	55	89	180	113	G 1	6,25	6	50	14	25	kg 2,601	GE3GGR63011A000	GE3GGR63044A000
		Psi 6090	2,56	1,16	4,72	2,62	0,55	3,29	2,17	3,50	7,09	4,45		0,25	0,24	1,97	0,55	0,98	lb 5,73		
GE3 G 1 1/2 R	25	MPa 42	65	29,5	124	66,5	14	83,5	55	89	180	113	G 1	6,25	6	50	14	25	kg 2,756	GE3GGR73011A000	GE3GGR73044A000
		Psi 6090	2,56	1,16	4,88	2,62	0,55	3,29	2,17	3,50	7,09	4,45		0,25	0,24	1,97	0,55	0,98	lb 6,08		

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED




## GE3 ANSI/ASME B1.20.1 NPT

TYPE	DN	PN		A	B	C	D	E	F	G	G1	H	I	ØM	ØK*	W*	X*	SW	ØLW	WEIGHT	ITEM CODE	
				mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	kg	lb			
GE3 N 1/4	6	MPa 50 Psi 7250		35 1,38	14,5 0,57	71 2,80	42,4 1,67	11 0,43	49 1,93	30 1,18	48,5 1,91	110 4,33	87 3,43	N 1/4	5,25 0,21	4,5 0,18	34 1,34	9 0,35	6 0,24	kg 0,536 lb 1,18	GE3NNT14011A000	GE3NNT14044A000
GE3 N 3/8	10	MPa 50 Psi 7250		40 1,57	17,4 0,69	73 2,87	44,4 1,75	11 0,43	54,25 2,14	35 1,38	54,5 2,15	110 4,33	93 3,66	N 3/8	5,25 0,21	4,5 0,18	34 1,34	9 0,35	10 0,39	kg 0,695 lb 1,53	GE3NNT24011A000	GE3NNT24044A000
GE3 N 1/2	13	MPa 50 Psi 7250		43 1,69	19,7 0,78	83 3,27	48,4 1,91	11 0,43	57 2,24	37 1,46	58,5 2,30	110 4,33	97 3,82	N 1/2	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	kg 0,825 lb 1,82	GE3NNT33011A000	GE3NNT33044A000
GE3 N 3/4	20	MPa 42 Psi 6090		57 2,24	25,4 1,00	95 3,74	62,5 2,46	14 0,55	75,5 2,97	49 1,93	75 2,95	180 7,09	105 4,13	N 3/4	6,25 0,25	6 0,24	50 1,97	14 0,55	20 0,79	kg 1,583 lb 3,49	GE3NNT44011A000	GE3NNT43044A000
GE3 N 1	25	MPa 42 Psi 6090		65 2,56	29,5 1,16	112 4,41	66,5 2,62	14 0,55	83,5 3,29	55 2,17	89 3,50	180 7,09	113 4,45	N 1	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	kg 2,421 lb 5,34	GE3NNT53011A000	GE3NNT53044A000
GE3 N 1 1/4 R	25	MPa 42 Psi 6090		65 2,56	29,5 1,16	120 4,72	66,5 2,62	14 0,55	83,5 3,29	55 2,17	89 3,50	180 7,09	113 4,45	N 1	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	kg 2,601 lb 5,73	GE3NNR63011A000	GE3NNR63044A000
GE3 N 1 1/2 R	25	MPa 42 Psi 6090		65 2,56	29,5 1,16	124 4,88	66,5 2,62	14 0,55	83,5 3,29	55 2,17	89 3,50	180 7,09	113 4,45	N 1	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	kg 2,756 lb 6,08	GE3NNR73011A000	GE3NNR73044A000

■ Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED




## GE3 SAE J1926-1

TYPE	DN	PN		A	B	C	D	E	F	G	G1	H	I	ØM	ØK*	W*	X*	SW	ØLW	WEIGHT	ITEM CODE	
				mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	kg	lb			
GE3 SAE4	6	MPa 50 Psi 7250		35 1,38	14,5 0,57	71 2,80	42,4 1,67	11 0,43	49 1,93	30 1,18	48,5 1,91	110 4,33	87 3,43	7/16	5,25 0,21	4,5 0,18	34 1,34	9 0,35	6 0,24	kg 0,512 lb 1,13	GE3EEE04011A000	GE3EEE04044A000
GE3 SAE6	10	MPa 50 Psi 7250		40 1,57	17,5 0,69	73 2,87	44,8 1,76	11 0,43	54,25 2,14	35 1,38	54,5 2,15	110 4,33	93 3,66	9/16	5,25 0,21	4,5 0,18	34 1,34	9 0,35	10 0,39	kg 0,695 lb 1,53	GE3EEE14011A000	GE3EEE14044A000
GE3 SAE8	13	MPa 50 Psi 7250		43 1,69	19,7 0,78	83 3,27	48,4 1,91	11 0,43	57 2,24	37 1,46	58,5 2,30	110 4,33	97 3,82	3/4	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	kg 0,825 lb 1,82	GE3EEE23011A000	GE3EEE23044A000
GE3 SAE12	20	MPa 42 Psi 6090		57 2,24	25,4 1,00	95 3,74	62,5 2,46	14 0,55	75,5 2,97	49 1,93	75 2,95	180 7,09	105 4,13	1 1/16	6,25 0,25	6 0,24	50 1,97	14 0,55	20 0,79	kg 1,583 lb 3,49	GE3EEE34011A000	GE3EEE34044A000
GE3 SAE16	25	MPa 42 Psi 6090		65 2,56	29,4 1,16	112 4,41	66,5 2,62	14 0,55	83,5 3,29	55 2,17	89 3,50	180 7,09	113 4,45	1 5/16	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	kg 2,421 lb 5,34	GE3EEE43011A000	GE3EEE43044A000
GE3 SAE20R	25	MPa 42 Psi 6090		65 2,56	29,4 1,16	120 4,72	66,5 2,62	14 0,55	83,5 3,29	55 2,17	89 3,50	180 7,09	113 4,45	1 5/8	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	kg 2,601 lb 5,73	GE3EEE53011A000	GE3EEE53044A000
GE3 SAE24R	25	MPa 42 Psi 6090		65 2,56	29,4 1,16	124 4,88	66,5 2,62	14 0,55	83,5 3,29	55 2,17	89 3,50	180 7,09	113 4,45	1 7/8	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	kg 2,756 lb 6,08	GE3EEE63011A000	GE3EEE63044A000

■ Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED

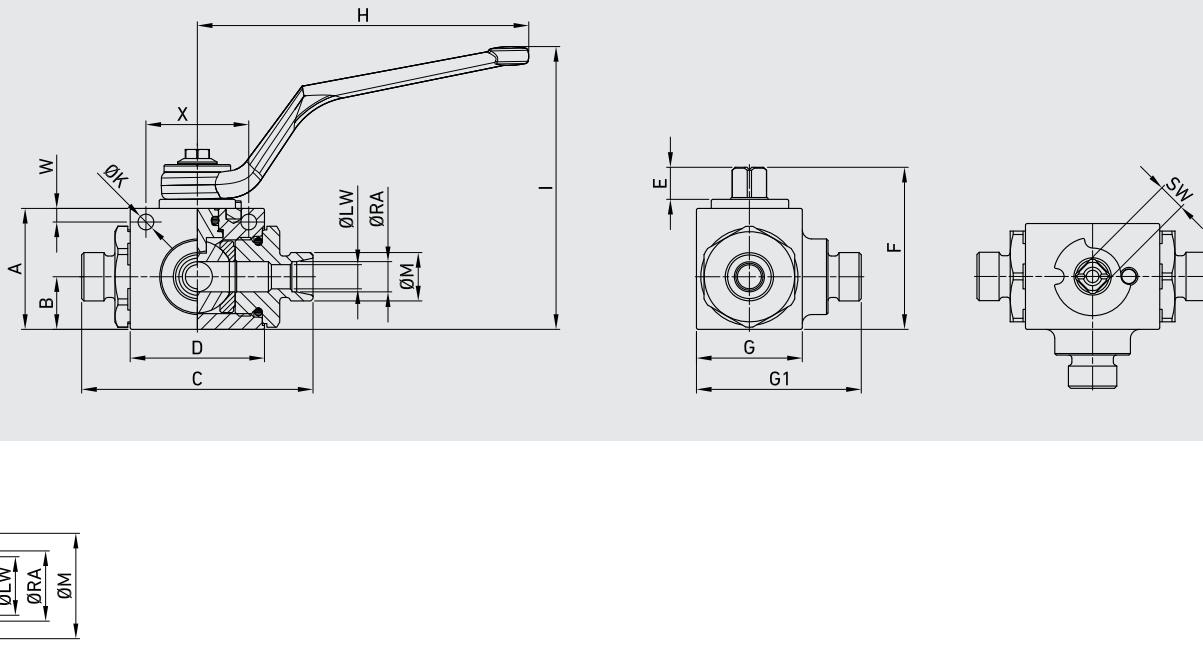


## GE3 DIN 2353 HEAVY SERIES

TYPE	DN	PN	A	B	C	D	E	F	G	G1	H	I	ØM	ØK*	W*	X*	SW	ØLW	ØRA	WEIGHT	ITEM CODE	
																					CS	SS
																					Carbon Steel	Stainless Steel
GE3 8S	6	MPa 50 Psi 7250	mm 35 14,5 76 42,4 11 49 30 48,5 110 87	inch 1,38 0,57 2,99 1,67 0,43 1,93 1,18 1,91 4,33 3,43		M16x1,5	5,25 4,5 34	9 4 8	kg 0,53	GE3DDS04011A000	GE3DDS04044A000											
GE3 10S	6	MPa 50 Psi 7250	mm 35 14,5 76 42,4 11 49 30 48,5 110 87	inch 1,38 0,57 2,99 1,67 0,43 1,93 1,18 1,91 4,33 3,43		M18x1,5	5,25 4,5 34	9 6 10	kg 0,532	GE3DDS14011A000	GE3DDS14044A000											
GE3 12S	8	MPa 50 Psi 7250	mm 35 14,5 76 42,4 11 49 30 48,5 110 87	inch 1,38 0,57 2,99 1,67 0,43 1,93 1,18 1,91 4,33 3,43		M20x1,5	5,25 4,5 34	9 8 12	kg 0,535	GE3DDRS4011A000	GE3DDRS4044A000											
GE3 12S	10	MPa 50 Psi 7250	mm 40 17,4 76 44,4 11 54,25 35 54,5 110 93	inch 1,57 0,69 2,99 1,75 0,43 2,14 1,38 2,15 4,33 3,66		M20x1,5	5,25 4,5 34	9 10 12	kg 0,633	GE3DDS24011A000	GE3DDS24044A000											
GE3 14S	10	MPa 50 Psi 7250	mm 40 17,4 82,5 44,4 11 54,25 35 54,5 110 93	inch 1,57 0,69 3,25 1,75 0,43 2,14 1,38 2,15 4,33 3,66		M22x1,5	5,25 4,5 34	9 10 14	kg 0,665	GE3DDS34011A000	GE3DDS34044A000											
GE3 16S	13	MPa 50 Psi 7250	mm 43 19,7 89 48,4 11 57 37 59 110 97	inch 1,69 0,78 3,50 1,91 0,43 2,24 1,46 2,32 4,33 3,82		M24x1,5	5,25 5 36	9 13 16	kg 0,722	GE3DDS43011A000	GE3DDS43044A000											
GE3 20S	13	MPa 50 Psi 7250	mm 43 19,7 93 48,4 11 57 37 59 110 97	inch 1,69 0,78 3,66 1,91 0,43 2,24 1,46 2,32 4,33 3,82		M30x2	5,25 5 36	9 13 20	kg 0,861	GE3DDS53011A000	GE3DDS53044A000											
GE3 25S	20	MPa 35 40 Psi 5075 5800	mm 57 25,4 111 62,5 14 75,5 49 75 180 105	inch 2,24 1,00 4,37 2,46 0,55 2,97 1,93 2,95 7,09 4,13		M36x2	6,25 6 50	14 20 25	kg 1,639	GE3DDS64011A000	GE3DDS63044A000											
GE3 30S	25	MPa 35 Psi 5075	mm 65 29,5 121 66,5 14 83,5 55 89 180 113	inch 2,56 1,16 4,76 2,62 0,55 3,29 2,17 3,50 7,09 4,45		M42x2	6,25 6 50	14 25 30	kg 2,361	GE3DDS73011A000	GE3DDS73044A000											
GE3 38S	25	MPa 35 Psi 5075	mm 65 29,5 131 66,5 14 83,5 55 89 180 113	inch 2,56 1,16 5,16 2,62 0,55 3,29 2,17 3,50 7,09 4,45		M52x2	6,25 6 50	14 25 38	kg 2,655	GE3DDS83011A000	GE3DDS83044A000											

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED




## GE3 DIN 2353 LIGHT SERIES

TYPE	DN	PN		A	B	C	D	E	F	G	G1	H	I	ØM	ØK*	W*	X*	SW	ØLW	ØRA	WEIGHT	ITEM CODE			
				MPa	50	mm	35	14,5	76	42,4	11	49	30	48,5	110	87	M12x1,5	5,25	4,5	34	9	6	6	kg	0,53
		Psi	7250	inch	1,38	0,57	2,99	1,67	0,43	1,93	1,18	1,91	4,33	3,43		0,21	0,18	1,34	0,35	0,24	0,24	lb	1,17	GE3DDL04011A000	GE3DDL04044A000
GE3 6L	6	MPa	50	mm	35	14,5	76	42,4	11	49	30	48,5	110	87	M12x1,5	5,25	4,5	34	9	6	8	kg	0,532	GE3DDL14011A000	GE3DDL14044A000
		Psi	7250	inch	1,38	0,57	2,99	1,67	0,43	1,93	1,18	1,91	4,33	3,43		0,21	0,18	1,34	0,35	0,24	0,31	lb	1,17	GE3DDL14011A000	GE3DDL14044A000
GE3 10L	6	MPa	50	mm	35	14,5	76	42,4	11	49	30	48,5	110	87	M16x1,5	5,25	4,5	34	9	6	10	kg	0,535	GE3DDRL4011A000	GE3DDRL4044A000
		Psi	7250	inch	1,38	0,57	2,99	1,67	0,43	1,93	1,18	1,91	4,33	3,43		0,21	0,18	1,34	0,35	0,24	0,39	lb	1,18	GE3DDRL4011A000	GE3DDRL4044A000
GE3 10L	10	MPa	50	mm	40	17,4	76,5	44,4	11	54,25	35	54,5	110	93	M16x1,5	5,25	4,5	34	9	10	10	kg	0,633	GE3DDL24011A000	GE3DDL24044A000
		Psi	7250	inch	1,57	0,69	3,01	1,75	0,43	2,14	1,38	2,15	4,33	3,66		0,21	0,18	1,34	0,35	0,39	0,39	lb	1,40	GE3DDL24011A000	GE3DDL24044A000
GE3 12L	10	MPa	50	mm	40	17,4	79,5	44,4	11	54,25	35	54,5	110	93	M18x1,5	5,25	4,5	34	9	10	12	kg	0,665	GE3DDL34011A000	GE3DDL34044A000
		Psi	7250	inch	1,57	0,69	3,13	1,75	0,43	2,14	1,38	2,15	4,33	3,66		0,21	0,18	1,34	0,35	0,39	0,47	lb	1,47	GE3DDL34011A000	GE3DDL34044A000
GE3 15L	13	MPa	50	mm	43	19,7	87	48,4	11	57	37	59	110	97	M22x1,5	5,25	5	36	9	13	15	kg	0,722	GE3DDL43011A000	GE3DDL43044A000
		Psi	7250	inch	1,69	0,78	3,43	1,91	0,43	2,24	1,46	2,32	4,33	3,82		0,21	0,20	1,42	0,35	0,51	0,59	lb	1,59	GE3DDL43011A000	GE3DDL43044A000
GE3 18L	13	MPa	50	mm	43	19,7	87	48,4	11	57	37	59	110	97	M26x1,5	5,25	5	36	9	13	18	kg	0,861	GE3DDL53011A000	GE3DDL53044A000
		Psi	7250	inch	1,69	0,78	3,43	1,91	0,43	2,24	1,46	2,32	4,33	3,82		0,21	0,20	1,42	0,35	0,51	0,71	lb	1,90	GE3DDL53011A000	GE3DDL53044A000
GE3 22L	20	MPa	35   40	mm	57	25,4	110	62,5	14	75,5	49	75	180	105	M30x2	6,25	6	50	14	20	22	kg	1,639	GE3DDL64011A000	GE3DDL63044A000
		Psi	5075   5800	inch	2,24	1,00	4,33	2,46	0,55	2,97	1,93	2,95	7,09	4,13		0,25	0,24	1,97	0,55	0,79	0,87	lb	3,61	GE3DDL64011A000	GE3DDL63044A000
GE3 28L	25	MPa	35	mm	65	29,5	117	66,5	14	83,5	55	89	180	113	M36x2	6,25	6	50	14	25	28	kg	2,361	GE3DDL73011A000	GE3DDL73044A000
		Psi	5075	inch	2,56	1,16	4,61	2,62	0,55	3,29	2,17	3,50	7,09	4,45		0,25	0,24	1,97	0,55	0,98	1,10	lb	5,21	GE3DDL73011A000	GE3DDL73044A000
GE3 35L	25	MPa	35	mm	65	29,5	119	66,5	14	83,5	55	89	180	113	M45x2	6,25	6	50	14	25	35	kg	2,361	GE3DDL83011A000	GE3DDL83044A000
		Psi	5075	inch	2,56	1,16	4,69	2,62	0,55	3,29	2,17	3,50	7,09	4,45		0,25	0,24	1,97	0,55	0,98	1,38	lb	5,21	GE3DDL83011A000	GE3DDL83044A000
GE3 42L	25	MPa	35	mm	65	29,5	119	66,5	14	83,5	55	89	180	113	M52x2	6,25	6	50	14	25	42	kg	2,456	GE3DDL93011A000	GE3DDL93044A000
		Psi	5075	inch	2,56	1,16	4,69	2,62	0,55	3,29	2,17	3,50	7,09	4,45		0,25	0,24	1,97	0,55	0,98	1,65	lb	5,41	GE3DDL93011A000	GE3DDL93044A000

■ Size only for carbon steel valves with fixing holes included.

FIXING HOLES  
INCLUDED

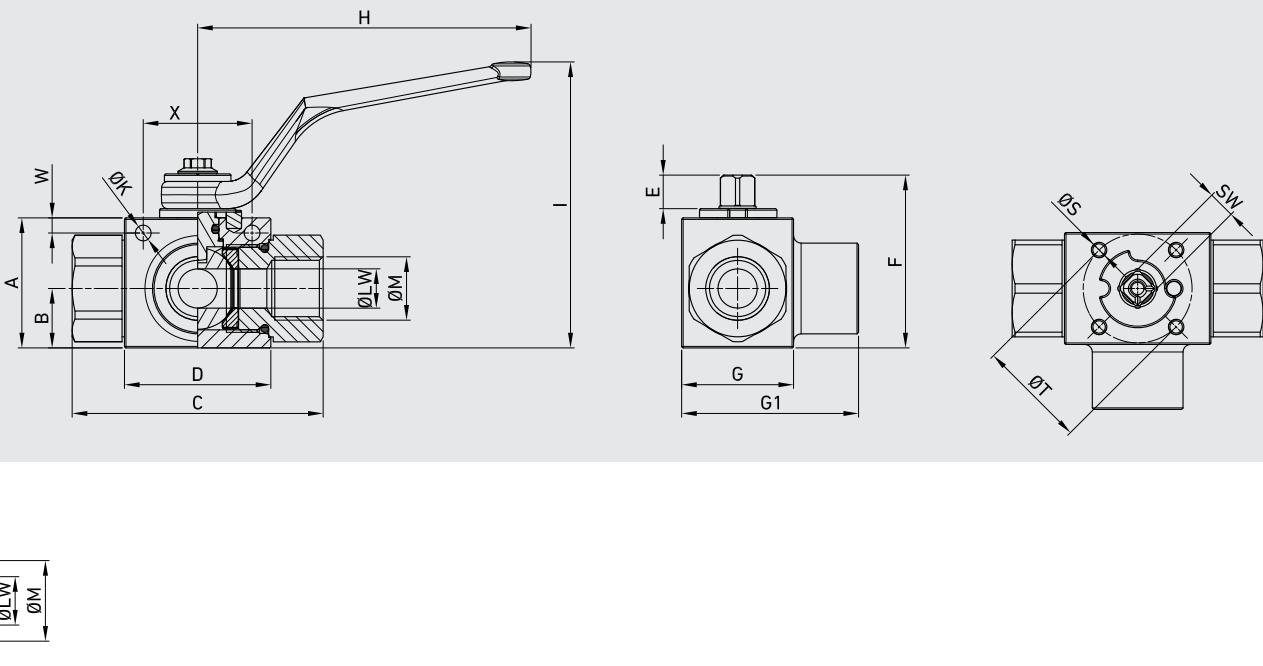


## GE3 DIN/ISO 228 BSP

Assembling threads per ISO5211

TYPE	DN	PN	A	B	C	D	E	F	G	G1	H	I	ØM	ØS	ØT	ØK*	W*	X*	SW	ØLW	WEIGHT	ITEM CODE		
																						Carbon Steel	Stainless Steel	
GE3 G 1/4	6	MPa 50	mm 35	14,5	71	42,4	11	49	30	48,5	110	87	G	35	5,25	4,5	34	F03	9	6	kg 0,536	GE3GGT14011AF50	GE3GGT14044AF50	
		Psi 7250	inch 1,38	0,57	2,80	1,67	0,43	1,93	1,18	1,91	4,33	3,43	1/4	M4	1,38	0,21	0,18	1,34		0,35	0,24	lb 1,18		
GE3 G 3/8	10	MPa 50	mm 40	17,4	73	44,4	11	54,25	35	54,5	110	93	G	36	5,25	4,5	34	F03	9	10	kg 0,695	GE3GGT24011AF50	GE3GGT24044AF50	
		Psi 7250	inch 1,57	0,69	2,87	1,75	0,43	2,14	1,38	2,15	4,33	3,66	3/8	M5	1,42	0,21	0,18	1,34		0,35	0,39	lb 1,53		
GE3 G 1/2	13	MPa 50	mm 43	19,7	83	48,4	11	57	37	58,5	110	97	G	36	5,25	5	36	F03	9	13	kg 0,825	GE3GGT33011AF50	GE3GGT33044AF50	
		Psi 7250	inch 1,69	0,78	3,27	1,91	0,43	2,24	1,46	2,30	4,33	3,82	1/2	M5	1,42	0,21	0,20	1,42		0,35	0,51	lb 1,82		
GE3 G 3/4	20	MPa 42	mm 57	25,4	95	62,5	14	75,5	49	75	180	105	G	50	6,25	6	50	F05	14	20	kg 1,583	GE3GGT44011AF50	GE3GGT43044AF50	
		Psi 6090	inch 2,24	1,00	3,74	2,46	0,55	2,97	1,93	2,95	7,09	4,13	3/4	M6	1,97	0,25	0,24	1,97		0,55	0,79	lb 3,49		
GE3 G 1	25	MPa 42	mm 65	29,5	112	66,5	14	83,5	55	89	180	113	G 1	50	6,25	6	50	F05	14	25	kg 2,421	GE3GGT53011AF50	GE3GGT53044AF50	
		Psi 6090	inch 2,56	1,16	4,41	2,62	0,55	3,29	2,17	3,50	7,09	4,45	M6	1,97	0,25	0,24	1,97		0,55	0,98	lb 5,34			
GE3 G 1 1/4 R	25	MPa 42	mm 65	29,5	120	66,5	14	83,5	55	89	180	113	G 1	50	6,25	6	50	F05	14	25	kg 2,601	GE3GGR63011AF50	GE3GGR63044AF50	
		Psi 6090	inch 2,56	1,16	4,72	2,62	0,55	3,29	2,17	3,50	7,09	4,45	1/4	M6	1,97	0,25	0,24	1,97		0,55	0,98	lb 5,73		
GE3 G 1 1/2 R	25	MPa 42	mm 65	29,5	124	66,5	14	83,5	55	89	180	113	G 1	50	6,25	6	50	F05	14	25	kg 2,756	GE3GGR73011AF50	GE3GGR73044AF50	
		Psi 6090	inch 2,56	1,16	4,88	2,62	0,55	3,29	2,17	3,50	7,09	4,45	1/2	M6	1,97	0,25	0,24	1,97		0,55	0,98	lb 6,08		

Size only for carbon steel valves with fixing holes included.

FIXING HOLES  
INCLUDED




## GE3 ANSI/ASME B1.20.1 NPT

Assembling threads per ISO5211

TYPE	DN	PN	A	B	C	D	E	F	G	G1	H	I	ØM	ØS	ØT	ØK*	W*	X*	ISO5211	SW	ØLW	WEIGHT	ITEM CODE	
			mm	inch																			CS Carbon Steel	SS Stainless Steel
GE3 N 1/4	6	MPa 50 Psi 7250	35 14,5 71 42,4 11 49 30 48,5 110 87 inch 1,38 0,57 2,80 1,67 0,43 1,93 1,18 1,91 4,33 3,43										M4 1/4	35 1,38 1,42 1,42 1,42	5,25 0,21 0,21 0,21	4,5 0,18 0,18 0,18	34 1,34 1,34 1,34 1,34	F03	9 0,35 0,35 0,35	6 0,24 0,39 0,39	kg 0,536 1,18 1,53	GE3NNNT14011AF50 GE3NNNT14044AF50	GE3NNNT14011AF50 GE3NNNT14044AF50	
GE3 N 3/8	10	MPa 50 Psi 7250	40 17,4 73 44,4 11 54,3 35 54,5 110 93 inch 1,57 0,69 2,87 1,75 0,43 2,14 1,38 2,15 4,33 3,66										M5 3/8	36 1,42 1,42 1,42 1,42	5,25 0,21 0,21 0,21	4,5 0,18 0,18 0,18	34 1,34 1,34 1,34 1,34	F03	9 0,35 0,35	10 0,39 0,39	kg 0,695 1,53	GE3NNNT24011AF50 GE3NNNT24044AF50	GE3NNNT24011AF50 GE3NNNT24044AF50	
GE3 N 1/2	13	MPa 50 Psi 7250	43 19,7 83 48,4 11 57 37 58,5 110 97 inch 1,69 0,78 3,27 1,91 0,43 2,24 1,46 2,30 4,33 3,82										M5 1/2	36 1,42 1,42 1,42 1,42	5,25 0,21 0,21 0,21	5 0,20 0,20 0,20	36 1,42 1,42 1,42 1,42	F03	9 0,35 0,35	13 0,51 0,51	kg 0,825 1,82	GE3NNNT33011AF50 GE3NNNT33044AF50	GE3NNNT33011AF50 GE3NNNT33044AF50	
GE3 N 3/4	20	MPa 42 Psi 6090	57 25,4 95 62,5 14 75,5 49 75 180 105 inch 2,24 1,00 3,74 2,46 0,55 2,97 1,93 2,95 7,09 4,13										M6 3/4	50 1,97 1,97 1,97 1,97	6,25 0,25 0,25 0,25	6 0,24 0,24 0,24	50 1,97 1,97 1,97 1,97	F05	14 0,55 0,55	20 0,79 0,79	kg 1,583 3,49	GE3NNNT 44011AF50 GE3NNNT 44044AF50	GE3NNNT 44011AF50 GE3NNNT 44044AF50	
GE3 N 1	25	MPa 42 Psi 6090	65 29,5 112 66,5 14 83,5 55 89 180 113 inch 2,56 1,16 4,41 2,62 0,55 3,29 2,17 3,50 7,09 4,45										N1 M6	50 1,97 1,97 1,97 1,97	6,25 0,25 0,25 0,25	6 0,24 0,24 0,24	50 1,97 1,97 1,97 1,97	F05	14 0,55 0,55	25 0,98 0,98	kg 2,421 5,34	GE3NNNT53011AF50 GE3NNNT53044AF50	GE3NNNT53011AF50 GE3NNNT53044AF50	
GE3 N 1 1/4 R	25	MPa 42 Psi 6090	65 29,5 120 66,5 14 83,5 55 89 180 113 inch 2,56 1,16 4,72 2,62 0,55 3,29 2,17 3,50 7,09 4,45										N1 M6 1/4	50 1,97 1,97 1,97 1,97	6,25 0,25 0,25 0,25	6 0,24 0,24 0,24	50 1,97 1,97 1,97 1,97	F05	14 0,55 0,55	25 0,98 0,98	kg 2,601 5,73	GE3NNR63011AF50 GE3NNR63044AF50	GE3NNR63011AF50 GE3NNR63044AF50	
GE3 N 1 1/2 R	25	MPa 42 Psi 6090	65 29,5 124 66,5 14 83,5 55 89 180 113 inch 2,56 1,16 4,88 2,62 0,55 3,29 2,17 3,50 7,09 4,45										M6 1/2	50 1,97 1,97 1,97 1,97	6,25 0,25 0,25 0,25	6 0,24 0,24 0,24	50 1,97 1,97 1,97 1,97	F05	14 0,55 0,55	25 0,98 0,98	kg 2,756 6,08	GE3NNR73011AF50 GE3NNR73044AF50	GE3NNR73011AF50 GE3NNR73044AF50	

Size only for carbon steel valves with fixing holes included.

FIXING HOLES  
INCLUDED



## GE3 SAE J1926-1

Assembling threads per ISO5211

TYPE	DN	PN	A	B	C	D	E	F	G	G1	H	I	ØM	ØS	ØT	ØK*	W*	X*	ISO5211	SW	ØLW	WEIGHT	ITEM CODE	
			mm	inch																			CS Carbon Steel	SS Stainless Steel
GE3 SAE4	6	MPa 50 Psi 7250	35 14,5 71 42,4 11 49 30 48,5 110 87 7/16 inch 1,38 0,57 2,80 1,67 0,43 1,93 1,18 1,91 4,33 3,43										M4 7/16	35 1,38 1,42 1,42 1,42	5,25 0,21 0,21 0,21	4,5 0,18 0,18 0,18	34 1,34 1,34 1,34 1,34	F03	9 0,35 0,35	6 0,24 0,39 0,39	kg 0,512 1,13	GE3EEE04011AF50 GE3EEE04044AF50	GE3EEE04011AF50 GE3EEE04044AF50	
GE3 SAE6	10	MPa 50 Psi 7250	40 17,5 73 44,4 11 54,3 35 54,5 110 93 9/16 inch 1,57 0,69 2,87 1,76 0,43 2,14 1,38 2,15 4,33 3,66										M4 9/16	35 1,38 1,42 1,42 1,42	5,25 0,21 0,21 0,21	4,5 0,18 0,18 0,18	34 1,34 1,34 1,34 1,34	F03	9 0,35 0,35	10 0,39 0,39	kg 0,695 1,53	GE3EEE14011AF50 GE3EEE14044AF50	GE3EEE14011AF50 GE3EEE14044AF50	
GE3 SAE8	13	MPa 50 Psi 7250	43 19,7 83 48,4 11 57 37 58,5 110 97 3/4 inch 1,69 0,78 3,27 1,91 0,43 2,24 1,46 2,30 4,33 3,82										M5 3/4	36 1,42 1,42 1,42 1,42	5,25 0,21 0,21 0,21	5 0,20 0,20 0,20	36 1,42 1,42 1,42 1,42	F03	9 0,35 0,35	13 0,51 0,51	kg 0,825 1,82	GE3EEE23011AF50 GE3EEE23044AF50	GE3EEE23011AF50 GE3EEE23044AF50	
GE3 SAE12	20	MPa 42 Psi 6090	57 25,4 95 62,5 14 75,5 49 75 180 105 1 1/16 inch 2,24 1,00 3,74 2,46 0,55 2,97 1,93 2,95 7,09 4,13										M5 1 1/16	36 1,42 1,42 1,42 1,42	6,25 0,25 0,25 0,25	6 0,24 0,24 0,24	50 1,97 1,97 1,97 1,97	F03	14 0,55 0,55	20 0,79 0,79	kg 1,583 3,49	GE3EEE34011AF50 GE3EEE34044AF50	GE3EEE34011AF50 GE3EEE34044AF50	
GE3 SAE16	25	MPa 42 Psi 6090	65 29,4 112 66,5 14 83,5 55 89 180 113 1 5/16 inch 2,56 1,16 4,41 2,62 0,55 3,29 2,17 3,50 7,09 4,45										M6 1 5/16	50 1,97 1,97 1,97 1,97	6,25 0,25 0,25 0,25	6 0,24 0,24 0,24	50 1,97 1,97 1,97 1,97	F05	14 0,55 0,55	25 0,98 0,98	kg 2,421 5,34	GE3EEE43011AF50 GE3EEE43044AF50	GE3EEE43011AF50 GE3EEE43044AF50	
GE3 SAE20R	25	MPa 42 Psi 6090	65 29,4 120 66,5 14 83,5 55 89 180 113 1 5/8 inch 2,56 1,16 4,72 2,62 0,55 3,29 2,17 3,50 7,09 4,45										M6 1 5/8	50 1,97 1,97 1,97 1,97	6,25 0,25 0,25 0,25	6 0,24 0,24 0,24	50 1,97 1,97 1,97 1,97	F05	14 0,55 0,55	25 0,98 0,98	kg 2,601 5,73	GE3EEE53011AF50 GE3EEE53044AF50	GE3EEE53011AF50 GE3EEE53044AF50	
GE3 SAE24R	25	MPa 42 Psi 6090	65 29,4 124 66,5 14 83,5 55 89 180 113 1 7/8 inch 2,56 1,16 4,88 2,62 0,55 3,29 2,17 3,50 7,09 4,45										M6 1 7/8	50 1,97 1,97 1,97 1,97	6,25 0,25 0,25 0,25	6 0,24 0,24 0,24	50 1,97 1,97 1,97 1,97	F05	14 0,55 0,55	25 0,98 0,98	kg 2,756 6,08	GE3EEE63011AF50 GE3EEE63044AF50	GE3EEE63011AF50 GE3EEE63044AF50	

Size only for carbon steel valves with fixing holes included.

FIXING HOLES  
INCLUDED



# GE5



## 3-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0


### CS Carbon Steel

- Type: ball valve 3 way
- Sizes: from DN6 up to DN13
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### STANDARD COMPOSITION OF VALVE

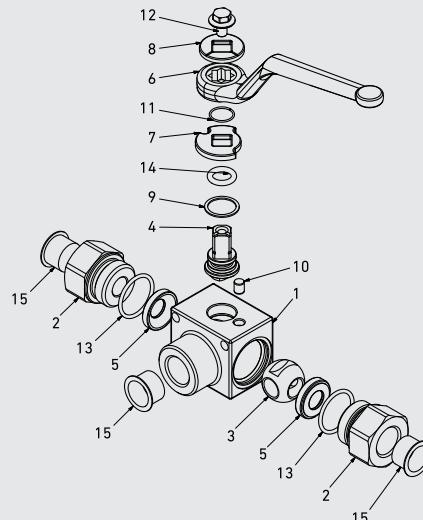

**WARNING!**  
Pressure inlet only  
from center port 1



		CS	Carbon Steel	MATERIAL
POS	DESCRIPTION	Q.TY		
1	Body	1		1,0737
2	Adapter	2		1,0737
3	Ball	1		1,0737
4	Stem	1		1,0737
5	Ball seat	2		POM
6	Handle	1		ZINC
7	Washer	1		1,0116
8	Washer	1		1,0116
9	Stem ring	1		POM
10	Pin	1		1,0737
11	Seeger	1		1,4301
12	Adapter o-ring	2		NBR
13	Stem o-ring	1		NBR
14	Screw	1	Din 6921 8.8	
15	Caps	3		PVC



SMALLER DESIGN

## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GE5 3-way

Ends \_\_\_\_\_

GAS DIN/	NPT ANSI	SAE
ISO 228	/ASME	J1926-1
BSP	B1.20.1	
G 1/4	N 1/4	SAE4
G 3/8	N 3/8	SAE6
G 1/2	N 1/2	SAE8

Size \_\_\_\_\_

from DN6 to DN13

Body Material \_\_\_\_\_

● 1 = 1,0737

Adapter material \_\_\_\_\_

● 1 = 1,0737

Stem material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Ball Material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Seat material \_\_\_\_\_

A = POM



Seal material \_\_\_\_\_

B = NBR


\*On request

- Reduced bore
- Special threads
- Pressure class up to PN50 Mpa
- Pneumatic and electrical actuator
- Security block
- Locking device

For further special requests please consult our technical/commercial service.

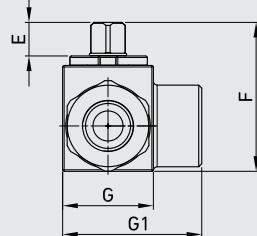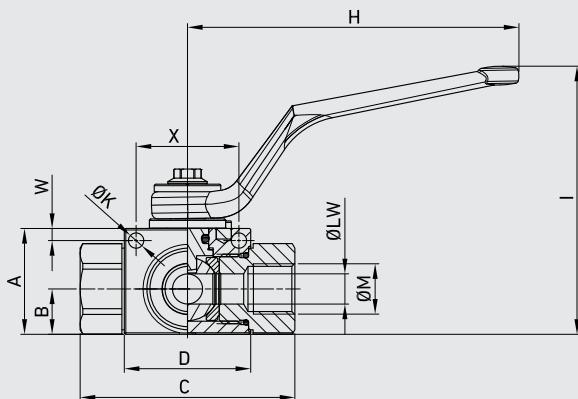


**SMALLER DESIGN**



## GE5 DIN/ISO 228 BSP

TYPE	DN	PN		ITEM CODE														
				A	B	C	D	E	F	G	G1	H	I	ØM	ØK	W	X	SW
GE5 G 1/4	6	MPa 50	mm 33 14,3 69 40,4 11,1 47,15 26 42 110 87	G 1/4	5,10	4	34	9	6	kg 0,411	lb 0,91	GE5GGT15011A000						
		Psi 7250	inch 1,30 0,56 2,72 1,59 0,44 1,86 1,02 1,65 4,33 3,43		0,20	0,16	1,34	0,35	0,24									
GE5 G 3/8	10	MPa 50	mm 35 15 71 41,8 11,1 49,15 30 46 110 89	G 3/8	5,1	4	34	9	10	kg 0,512	lb 1,13	GE5GGT25011A000						
		Psi 7250	inch 1,38 0,59 2,80 1,65 0,44 1,94 1,18 1,81 4,33 3,50		0,20	0,16	1,34	0,35	0,39									
GE5 G 1/2	13	MPa 50	mm 40 18,3 83 44,4 11,1 54,15 35 54 110 94	G 1/2	5,1	4	36	9	13	kg 0,72	lb 1,59	GE5GGT35011A000						
		Psi 7250	inch 1,57 0,72 3,27 1,75 0,44 2,13 1,38 2,13 4,33 3,70		0,20	0,16	1,42	0,35	0,51									


FIXING HOLES INCLUDED



## GE5 ANSI/ASME B1.20.1 NPT

TYPE	DN	PN		ITEM CODE														
				A	B	C	D	E	F	G	G1	H	I	ØM	ØK	W	X	SW
GE5 N 1/4	6	MPa 50	mm 33 14,3 69 40,4 11,1 47,15 26 42 110 87	N 1/4	5,10	4	34	9	6	kg 0,411	lb 0,91	GE5NNNT15011A000						
		Psi 7250	inch 1,30 0,56 2,72 1,59 0,44 1,86 1,02 1,65 4,33 3,43		0,20	0,16	1,34	0,35	0,24									
GE5 N 3/8	10	MPa 50	mm 35 15 71 41,8 11,1 49,15 30 46 110 89	N 3/8	5,1	4	34	9	10	kg 0,512	lb 1,13	GE5NNNT25011A000						
		Psi 7250	inch 1,38 0,59 2,80 1,65 0,44 1,94 1,18 1,81 4,33 3,50		0,20	0,16	1,34	0,35	0,39									
GE5 N 1/2	13	MPa 50	mm 40 18,3 83 44,4 11,1 54,15 35 54 110 94	N 1/2	5,1	4	36	9	13	kg 0,72	lb 1,59	GE5NNNT35011A000						
		Psi 7250	inch 1,57 0,72 3,27 1,75 0,44 2,13 1,38 2,13 4,33 3,70		0,20	0,16	1,42	0,35	0,51									

FIXING HOLES INCLUDED



## GE5 SAE J1926-1

TYPE	DN	PN	A	B	C	D	E	F	G	G1	H	I	ØM	ØK	W	X	SW	ØLW	WEIGHT	ITEM CODE		
			MPa	50	mm	33	14,3	69	40,4	11,1	47,15	26	42	110	87	7/16	5,10	4	34	9	6	kg 0,411
GE5 SAE4	6	PSI	7250		inch	1,30	0,56	2,72	1,59	0,44	1,86	1,02	1,65	4,33	3,43	UNF	0,20	0,16	1,34	0,35	0,24	GE5EEE05011A000
		PSI	7250		inch	1,38	0,59	2,80	1,65	0,43	1,94	1,18	1,81	4,33	3,50	UNF	0,20	0,16	1,34	0,35	0,39	GE5EEE15011A000
GE5 SAE6	10	PSI	7250		inch	1,38	0,59	2,80	1,65	0,43	1,94	1,18	1,81	4,33	3,50	UNF	0,20	0,16	1,34	0,35	0,39	GE5EEE15011A000
		PSI	7250		inch	1,57	0,72	3,27	1,75	0,44	2,13	1,38	2,13	4,33	3,70	UNF	0,20	0,16	1,42	0,35	0,51	GE5EEE25011A000
FIXING HOLES INCLUDED																						



# GE3K

## 3-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0




### Carbon Steel

- Type: ball valve 3 way special seats, zero leakage
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -20°C to +100°C


### Stainless Steel

- Type: ball valve 3 way special seats, zero leakage
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

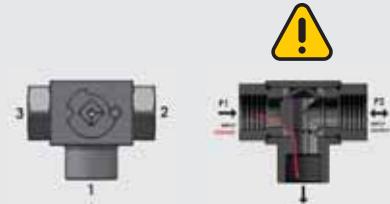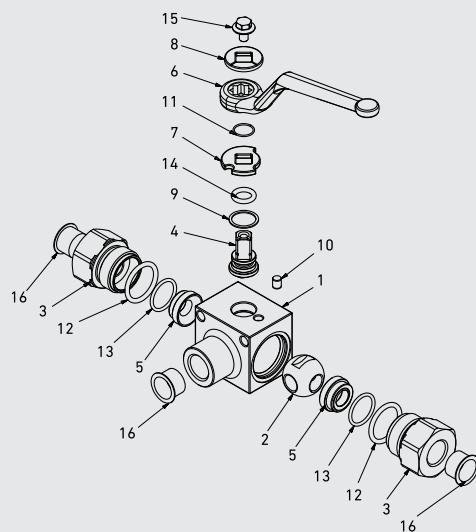

GE3K ball valve the seal on the left (a) is pushed towards the ball by the pressure (p1) the floating ball is pushed against the seal on the right (b) creating a watertight seal without any leakages.



POS	DESCRIPTION	Q.TY	CS	SS
			Carbon Steel	Stainless Steel
1	Body	1	1,0737	1,4404
2	Adapter	2	1,0737	1,4404
3	Ball	1	1,0737	1,4404
4	Stem	1	1,0737	1,4404
5	Ball seat	2	POM	POM
6	Handle	1	ZINC	ZINC
7	Washer	1	1,0116	1,0116
8	Washer	1	1,0116	1,4301
9	Stem ring	1	POM	POM
10	Pin	1	1,0737	1,4301
11	Seeger	1	1,4301	1,4301
12	Adapter o-ring	2	NBR	NBR
13	Seal o-ring	2	NBR	NBR
14	Stem o-ring	1	NBR	NBR
15	Screw	1	Din 6921 8.8	Din 6921 A2
16	Caps	3	PVC	PVC



## CODE DESCRIPTION STRUCTURE

**GE3K** **G1/2** **DN13** **1** **1** **1** **1** **A** **B**

Type and way of valve \_\_\_\_\_

GE3K 3-way

Ends \_\_\_\_\_

GAS DIN/ ISO 228/ BSP	NPT ANSI / ASME	SAE J1926-1
		B1.20.1
G 1/4	N 1/4	SAE4
G 3/8	N 3/8	SAE6
G 1/2	N 1/2	SAE8
G 3/4	N 3/4	SAE12
G 1	N 1	SAE16
G 1 1/4 R	N 1 1/4 R	SAE20R
G 1 1/2 R	N 1 1/2 R	SAE24R

Size \_\_\_\_\_

from DN6 to DN25

Body Material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Stem material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404\*
- 4 = 1,4404

Ball Material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*



Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN40 Mpa
- Pneumatic and electrical actuator
- Security block
- Locking device

For further special requests please consult our technical/commercial service.

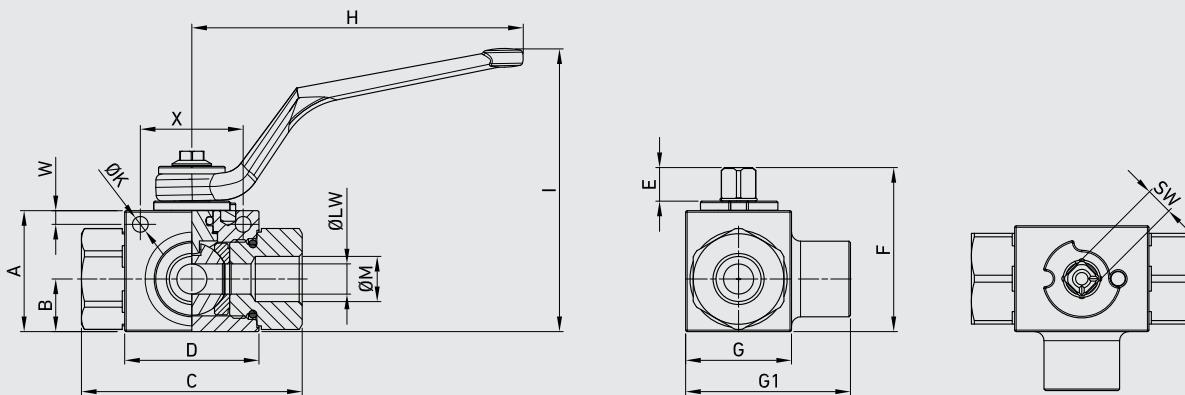


## GE3K DIN/ISO 228 BSP

TYPE	DN	PN	A	B	C	D	E	F	G	G1	H	I	ØM	ØK*	W*	X*	SW	ØLW	WEIGHT	ITEM CODE								
			mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	CS Carbon Steel	SS Stainless Steel								
GE3K G 1/4	6	MPa 50	mm 35	1,38	14,5	2,80	71	1,67	42,4	0,43	1,93	30	1,18	48,5	1,91	110	3,33	87	G 1/4	5,25 0,21	4,5 0,18	34 1,34	9 0,35	6 0,24	kg 0,536	lb 1,18	GK3GGT14011A000	GK3GGT14044A000
		Psi 7250	inch 0,57	0,69	2,87	1,75	73	0,43	2,14	1,11	1,93	35	0,38	54,5	2,15	110	4,33	3,43										
GE3K G 3/8	10	MPa 50	mm 40	1,57	17,4	2,87	73	0,69	44,4	0,43	2,14	35	1,38	54,5	2,15	110	4,33	3,66	G 3/8	5,25 0,21	4,5 0,18	34 1,34	9 0,35	10 0,39	kg 0,695	lb 1,53	GK3GGT24011A000	GK3GGT24044A000
		Psi 7250	inch 1,69	1,07	17,4	2,87	73	0,78	44,4	0,43	2,14	35	1,38	54,5	2,15	110	4,33	3,66										
GE3K G 1/2	13	MPa 50	mm 43	1,69	19,7	2,87	83	0,78	48,4	0,43	2,24	37	1,38	58,5	2,30	110	4,33	3,82	G 1/2	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	kg 0,825	lb 1,82	GK3GGT33011A000	GK3GGT33044A000
		Psi 7250	inch 1,69	1,07	19,7	2,87	83	0,78	48,4	0,43	2,24	37	1,38	58,5	2,30	110	4,33	3,82										
GE3K G 3/4	20	MPa 40	mm 57	2,24	25,4	3,74	95	1,00	62,5	0,55	2,46	49	1,93	75,5	2,97	75	3,50	180	G 3/4	6,25 0,25	6 0,24	50 1,97	14 0,55	20 0,79	kg 1,583	lb 3,49	GK3GGT44011A000	GK3GGT43044A000
		Psi 5800	inch 5075	2,24	1,00	3,74	95	0,55	62,5	0,55	2,46	49	1,93	75,5	2,97	75	3,50	180										
GE3K G 1	25	MPa 35	mm 65	2,56	29,5	4,13	105	1,16	66,5	0,55	2,62	55	1,93	83,5	2,17	89	3,50	180	G 1	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	kg 2,421	lb 5,34	GK3GGT53011A000	GK3GGT53044A000
		Psi 5075	inch 2,56	1,16	29,5	4,13	105	0,55	66,5	0,55	2,62	55	1,93	83,5	2,17	89	3,50	180										
GE3K G 1 1/4 R	25	MPa 35	mm 65	2,56	29,5	4,72	120	1,16	66,5	0,55	2,62	55	1,93	83,5	2,17	89	3,50	180	G 1	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	kg 2,601	lb 5,73	GK3GGR63011A000	GK3GGR63044A000
		Psi 5075	inch 2,56	1,16	29,5	4,72	120	0,55	66,5	0,55	2,62	55	1,93	83,5	2,17	89	3,50	180										
GE3K G 1 1/2 R	25	MPa 35	mm 65	2,56	29,5	4,88	124	1,16	66,5	0,55	2,62	55	1,93	83,5	2,17	89	3,50	180	G 1	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	kg 2,756	lb 6,08	GK3GGR73011A000	GK3GGR73044A000
		Psi 5075	inch 2,56	1,16	29,5	4,88	124	0,55	66,5	0,55	2,62	55	1,93	83,5	2,17	89	3,50	180										

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED




## GE3K ANSI/ASME B1.20.1 NPT

TYPE	DN	PN		A	B	C	D	E	F	G	G1	H	I	ØM	ØK*	W*	X*	SW	ØLW	WEIGHT	CS	SS
																					Carbon Steel	Stainless Steel
GE3K N 1/4	6	MPa 50 Psi 7250	mm 35 inch 1,38	14,5	71	42,4	11	49	30	48,5	110	87	N 1/4	5,25 0,21	4,5 0,18	34 1,34	9 0,35	6 0,24	kg 0,536 lb 1,18	GK3NNNT14011A000	GK3NNNT14044A000	
GE3K N 3/8	10	MPa 50 Psi 7250	mm 40 inch 1,57	17,4	73	44,4	11	54,25	35	54,5	110	93	N 3/8	5,25 0,21	4,5 0,18	34 1,34	9 0,35	10 0,39	kg 0,695 lb 1,53	GK3NNNT24011A000	GK3NNNT24044A000	
GE3K N 1/2	13	MPa 50 Psi 7250	mm 43 inch 1,69	19,7	83	48,4	11	57	37	58,5	110	97	N 1/2	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	kg 0,825 lb 1,82	GK3NNNT33011A000	GK3NNNT33044A000	
GE3K N 3/4	20	MPa 40 Psi 5800 5075	mm 57 inch 2,24	25,4	95	62,5	14	75,5	49	75	180	105	N 3/4	6,25 0,25	6 0,24	50 1,97	14 0,55	20 0,79	kg 1,583 lb 3,49	GK3NNNT44011A000	GK3NNNT43044A000	
GE3K N 1	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5	105	66,5	14	83,5	55	89	180	113	N 1	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	kg 2,421 lb 5,34	GK3NNNT53011A000	GK3NNNT53044A000	
GE3K N 1 1/4 R	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5	120	66,5	14	83,5	55	89	180	113	N 1	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	kg 2,601 lb 5,73	GK3NNR63011A000	GK3NNR63044A000	
GE3K N 1 1/2 R	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5	124	66,5	14	83,5	55	89	180	113	N 1	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	kg 2,756 lb 6,08	GK3NNR73011A000	GK3NNR73044A000	

■ Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED



## GE3K SAE J1926-1

TYPE	DN	PN		A	B	C	D	E	F	G	G1	H	I	ØM	ØK*	W*	X*	SW	ØLW	WEIGHT	CS	SS
																					Carbon Steel	Stainless Steel
GE3K SAE4	6	MPa 50 Psi 7250	mm 35 inch 1,38	14,5	71	42,4	11	49	30	48,5	110	87	7/16	5,25 0,21	4,5 0,18	34 1,34	9 0,35	6 0,24	kg 0,536 lb 1,18	GK3EEE04011A000	GK3EEE04044A000	
GE3K SAE6	10	MPa 50 Psi 7250	mm 40 inch 1,57	17,4	73	44,4	11	54,25	35	54,5	110	93	9/16	5,25 0,21	4,5 0,18	34 1,34	9 0,35	10 0,39	kg 0,695 lb 1,53	GK3EEE14011A000	GK3EEE14044A000	
GE3K SAE8	13	MPa 50 Psi 7250	mm 43 inch 1,69	19,7	83	48,4	11	57	37	58,5	110	97	3/4	5,25 0,21	5 0,20	36 1,42	9 0,35	13 0,51	kg 0,825 lb 1,82	GK3EEE23011A000	GK3EEE23044A000	
GE3K SAE12	20	MPa 40 Psi 5800 5075	mm 57 inch 2,24	25,4	95	62,5	14	75,5	49	75	180	105	1 1/16	6,25 0,25	6 0,24	50 1,97	14 0,55	20 0,79	kg 1,583 lb 3,49	GK3EEE34011A000	GK3EEE34044A000	
GE3K SAE16	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5	105	66,5	14	83,5	55	89	180	113	1 5/16	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	kg 2,421 lb 5,34	GK3EEE43011A000	GK3EEE43044A000	
GE3K SAE20R	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5	120	66,5	14	83,5	55	89	180	113	1 5/8	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	kg 2,601 lb 5,73	GK3EEE53011A000	GK3EEE53044A000	
GE3K SAE24R	25	MPa 35 Psi 5075	mm 65 inch 2,56	29,5	124	66,5	14	83,5	55	89	180	113	1 7/8	6,25 0,25	6 0,24	50 1,97	14 0,55	25 0,98	kg 2,756 lb 6,08	GK3EEE63011A000	GK3EEE63044A000	

■ Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED



# GEF

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0


### **CS Carbon Steel**

- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: ISO6162-1/-2  
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: from -20°C  
to +100°C

### **SS Stainless Steel**

- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: ISO6162-1/-2  
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: from -30°C  
to +100°C

### **STANDARD COMPOSITION OF VALVE**

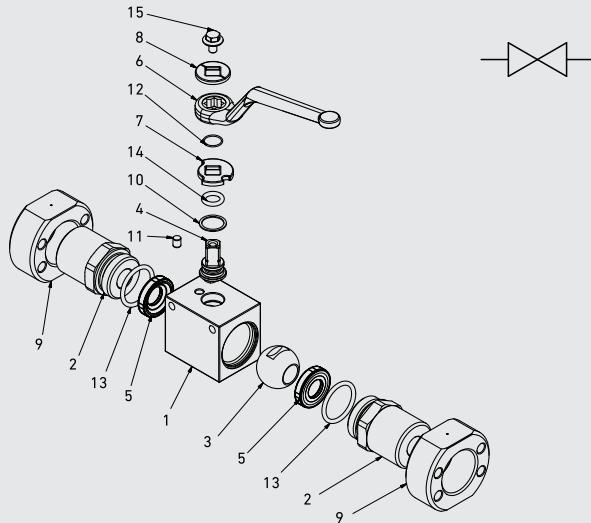

POS	DESCRIPTION	Q.TY	CS	SS	
			Carbon Steel	MATERIAL	Stainless Steel
1	Body	1		1,0737	1,4404
2	Adapter	2		1,0737	1,4404
3	Ball	1		1,0737	1,4404
4	Stem	1		1,0737	1,4404
5	Ball seat	2	POM		POM
6	Handle	1	ZINC		ZINC
7	Washer	1	1,0116		1,4301
8	Washer	1	1,0116		1,4301
9	Flange	2	1,0737		1,4404
10	Stem ring	1	POM		POM
11	Pin	1	1,0737		1,4301
12	Seeger	1	1,4301		1,4301
13	Adapter o-ring	2	NBR		NBR
14	Stem o-ring	1	NBR		NBR
15	Screw	1	Din 6921 8.8		Din 6921 A2



## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GE 2-way

Ends \_\_\_\_\_

Valves      Valves  
dimension   dimension  
of pressure   of pressure  
(PSI) F3      (PSI) F6

S3000      S6000

Size \_\_\_\_\_

from DN13 to DN25

Body Material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Stem material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Ball Material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN6000 Psi
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

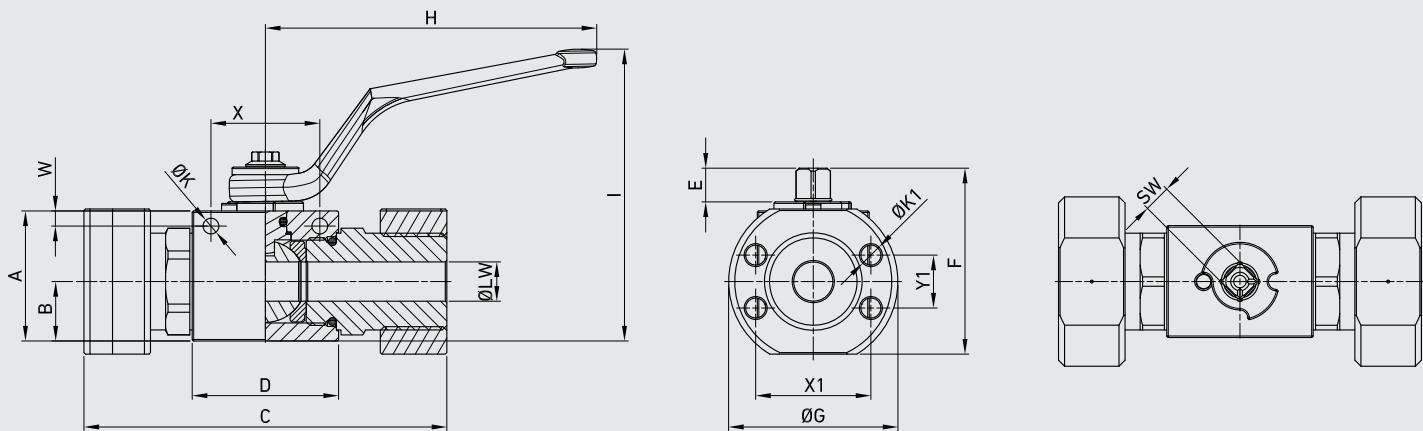

## ■ GEF SAE J518 S3000

TYPE	DN	PN		A	B	C	D	E	F	ØG	H	I	ØK1	X1	Y1	ØK*	W*	ØLW	SW	WEIGHT	ITEM CODE	
																					CS	SS
GEF3	13	MPa 34	mm 43 19,7 120 48,4 11 61,5 56 110 95	M8	38,1 17,5 5,25 5 36 13 9	kg 1,504	GE2FFC0L011A000	GE2FFC0L044A000														
		Psi 5000	inch 1,69 0,78 4,72 1,91 0,43 2,42 2,20 4,33 3,74		1,50 0,69 0,21 0,20 1,42 0,51 0,35	lb 3,32																
GEF3	20	MPa 34	mm 57 25,4 136 62,5 14 80,1 72 180 105	M10	47,6 22,2 6,25 6 50 20 14	kg 2,608	GE2FFC1L011A000	GE2FFC1L044A000														
		Psi 5000	inch 2,24 1,00 5,35 2,46 0,55 3,15 2,83 7,09 4,13		1,87 0,87 0,25 0,24 1,97 0,79 0,55	lb 5,75																
GEF3	25	MPa 34	mm 65 29,5 148 66,5 14 89 81 180 113	M10	52,4 26,2 6,25 6 50 25 14	kg 3,891	GE2FFC2L011A000	GE2FFC2L044A000														
		Psi 5000	inch 2,56 1,16 5,83 2,62 0,55 3,50 3,19 7,09 4,45		2,06 1,03 0,25 0,24 1,97 0,98 0,55	lb 8,58																

■ Size only for carbon steel valves with fixing holes included.

## ■ GEF SAE J518 S3000 UNC

TYPE	DN	PN		A	B	C	D	E	F	ØG	H	I	ØK1	X1	Y1	ØK*	W*	ØLW	SW	WEIGHT	ITEM CODE	
																					CS	SS
GEF3	13	MPa 34	mm 43 19,7 120 48,4 11 61,5 56 110 95 5/16-18	UNC	38,1 17,5 5,25 5 36 13 9	kg 1,504	GE2FUC0L011A000	GE2FUC0L044A000														
		Psi 5000	inch 1,69 0,78 4,72 1,91 0,43 2,42 2,20 4,33 3,74		1,50 0,69 0,21 0,20 1,42 0,51 0,35	lb 3,32																
GEF3	20	MPa 34	mm 57 25,4 136 62,5 14 80,1 72 180 105 3/8-16	UNC	47,6 22,2 6,25 6 50 20 14	kg 2,608	GE2FUC1L011A000	GE2FUC1L044A000														
		Psi 5000	inch 2,24 1,00 5,35 2,46 0,55 3,15 2,83 7,09 4,13		1,87 0,87 0,25 0,24 1,97 0,79 0,55	lb 5,75																
GEF3	25	MPa 34	mm 65 29,5 148 66,5 14 89 81 180 113 3/8-16	UNC	52,4 26,2 6,25 6 50 25 14	kg 3,891	GE2FUC2L011A000	GE2FUC2L044A000														
		Psi 5000	inch 2,56 1,16 5,83 2,62 0,55 3,50 3,19 7,09 4,45		2,06 1,03 0,25 0,24 1,97 0,98 0,55	lb 8,58																

■ Size only for carbon steel valves with fixing holes included.

## ■ GEF SAE J518 S6000

TYPE	DN	PN		A	B	C	D	E	F	ØG	H	I	ØK1	X1	Y1	ØK*	W*	X*	ØLW	SW	WEIGHT	ITEM CODE	
		MPa	Psi	mm	inch	mm	inch	mm	inch	mm	inch	mm	mm	inch	mm	inch	mm	inch	kg	lb	GEF SAE J518 S6000 CS	GEF SAE J518 S6000 SS	
GEF6	13	MPa 41		43	19,7	120	48,4	11	61,5	56	110	95	M8	40,5	18,2	5,25	5	36	13	9	kg 1,504	GE2FFC6G011A000	GE2FFC6G044A000
		Psi 6000		1,69	0,78	4,72	1,91	0,43	2,42	2,20	4,33	3,74		1,59	0,72	0,21	0,20	1,42	0,51	0,35	lb 3,32		
GEF6	20	MPa 40		57	25,4	136	62,5	14	80,1	72	180	105	M10	50,8	23,8	6,25	6	50	20	14	kg 2,608	GE2FFC74011A000	GE2FFC74044A000
		Psi 5800		2,24	1,00	5,35	2,46	0,55	3,15	2,83	7,09	4,13		2,00	0,94	0,25	0,24	1,97	0,79	0,55	lb 5,75		
GEF6	25	MPa 34		65	29,5	148	66,5	14	89	81	180	113	M12	57,2	27,8	6,25	6	50	25	14	kg 3,891	GE2FFC83011A000	GE2FFC83044A000
		Psi 5000		2,56	1,16	5,83	2,62	0,55	3,50	3,19	7,09	4,45		2,25	1,09	0,25	0,24	1,97	0,98	0,55	lb 8,58		

■ Size only for carbon steel valves with fixing holes included.

## ■ GEF SAE J518 S6000 UNC

TYPE	DN	PN		A	B	C	D	E	F	ØG	H	I	ØK1	X1	Y1	ØK*	W*	X*	ØLW	SW	WEIGHT	ITEM CODE	
		MPa	Psi	mm	inch	mm	inch	mm	inch	mm	inch	mm	mm	inch	mm	inch	mm	inch	kg	lb	GEF SAE J518 S6000 UNC CS	GEF SAE J518 S6000 UNC SS	
GEF6	13	MPa 41		43	19,7	120	48,4	11	61,5	56	110	95	5/16-18	40,5	18,2	5,25	5	36	13	9	kg 1,504	GE2FUC6G011A000	GE2FUC6G044A000
		Psi 6000		1,69	0,78	4,72	1,91	0,43	2,42	2,20	4,33	3,74	UNC	1,59	0,72	0,21	0,20	1,42	0,51	0,35	lb 3,32		
GEF6	20	MPa 40		57	25,4	136	62,5	14	75,5	72	180	105	3/8-16	50,8	23,8	6,25	6	50	20	14	kg 2,608	GE2FUC74011A000	GE2FUC74044A000
		Psi 5800		2,24	1,00	5,35	2,46	0,55	2,97	2,83	7,09	4,13	UNC	2,00	0,94	0,25	0,24	1,97	0,79	0,55	lb 5,75		
GEF6	25	MPa 34		65	29,5	148	66,5	14	89	81	180	113	7/16-14	57,2	27,8	6,25	6	50	25	14	kg 3,891	GE2FUC83011A000	GE2FUC83044A000
		Psi 5000		2,56	1,16	5,83	2,62	0,55	3,50	3,19	7,09	4,45	UNC	2,25	1,09	0,25	0,24	1,97	0,98	0,55	lb 8,58		

■ Size only for carbon steel valves with fixing holes included.



# GES

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0


### CS Carbon Steel

- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: SAE J518
- Pressure: up to PN420 / S6000
- Temp range: from -20°C to +100°C

### SS Stainless Steel

- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: SAE J518
- Pressure: up to PN420 / S6000
- Temp range: from -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

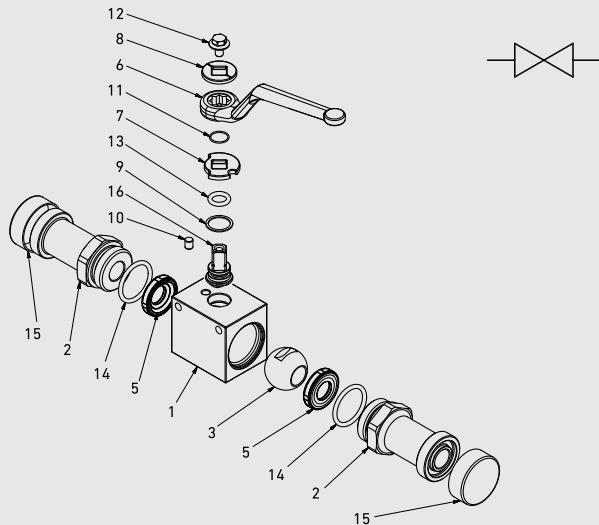

POS	DESCRIPTION	Q.TY	CS	SS	
			Carbon Steel	MATERIAL	Stainless Steel
1	Body	1		1,0737	1,4404
2	Adapter	2		1,0737	1,4404
3	Ball	1		1,0737	1,4404
4	Stem	1		1,0737	1,4404
5	Ball seat	2	POM		POM
6	Handle	1	ZINC		ZINC
7	Washer	1	1,0116		1,4301
8	Washer	1	1,0116		1,4301
9	Stem ring	1	POM		POM
10	Pin	1	1,0737		1,4301
11	Seeger	1	1,4301		1,4301
12	Adapter o-ring	2	NBR		NBR
13	Stem o-ring	1	NBR		NBR
14	Screw	1	Din 6921 8.8		Din 6921 A2
15	Caps	2	PVC		PVC



## CODE DESCRIPTION STRUCTURE

<b>GE</b>	<b>FS-S3</b>	<b>DN13</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>A</b>	<b>B</b>
-----------	--------------	-------------	----------	----------	----------	----------	----------	----------

Type and way of valve \_\_\_\_\_

GE 2-way

Ends \_\_\_\_\_

Valves      Valves  
dimension    dimension  
of pressure   of pressure  
(PSI) S3      (PSI) S6  
S3000      S6000

Size \_\_\_\_\_

from DN13 to DN25

Body Material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Stem material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404\*

Ball Material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404\*

Seat material \_\_\_\_\_

A = POM   D = PEEK\*   G = PA612\*   K = GEMPTFE\*   C = PTFE\*


Seal material \_\_\_\_\_

B = NBR   E = FKM\*   F = EPDM\*   L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN6000 Psi
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

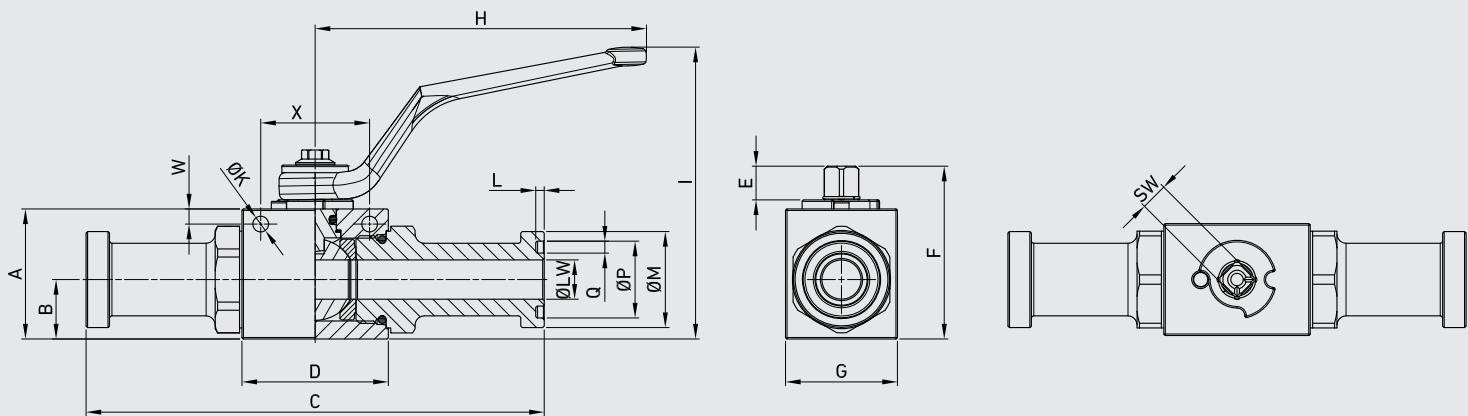

## GES SAE J518 S3000

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	L	ØM	ØP	Q	ØK*	W*	X*	SW	ØLW	WEIGHT	ITEM CODE	
																						CS Carbon Steel	SS Stainless Steel
GES3	13	MPa 34	mm 43	19,7	151,5	48,4	11	57	37	110	99,5	2,79	30,2	25,4	3,94	5,25	5	36	9	13	kg 0,96	GE2SSC0L011A000	GE2SSC0L044A000
		Psi 5000	inch 1,69	0,78	5,96	1,91	0,43	2,24	1,46	4,33	3,92	0,11	1,19	1,00	0,16	0,21	0,20	1,42	0,35	0,51	lb 2,12		
GES3	20	MPa 34	mm 55	25,4	162	62,5	14	75,5	45	180	106,5	2,79	38,1	31,75	3,94	6,25	6	50	14	20	kg 1,717	GE2SSC1L011A000	GE2SSC1L044A000
		Psi 5000	inch 2,17	1,00	6,38	2,46	0,55	2,97	1,77	7,09	4,19	0,11	1,50	1,25	0,16	0,25	0,24	1,97	0,55	0,79	lb 3,79		
GES3	25	MPa 34	mm 65	29,5	178	66,5	14	83,5	55	180	116,5	2,79	44,4	39,2	3,94	6,25	6	50	14	25	kg 2,597	GE2SSC2L011A000	GE2SSC2L044A000
		Psi 5000	inch 2,56	1,16	7,01	2,62	0,55	3,29	2,17	7,09	4,59	0,11	1,75	1,54	0,16	0,25	0,24	1,97	0,55	0,98	lb 5,73		

■ Size only for carbon steel valves with fixing holes included.

## GES3 SAE J518 S3000 EXTRA LONG

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	L	ØM	ØP	Q	ØK*	W*	X*	SW	ØLW	WEIGHT	ITEM CODE	
																						CS Carbon Steel	
GES3	13	MPa 34	mm 43	19,7	170	48,4	11,1	57,25	37	110	97	2,79	30,2	25,4	3,94	5,25	5	36	9	13	kg 1,02	GE2SXC0L011A000	
		Psi 5000	inch 1,69	0,78	6,69	1,91	0,44	2,25	1,46	4,33	3,82	0,11	1,19	1,00	0,16	0,21	0,20	1,42	0,35	0,51	lb 2,25		
GES3	20	MPa 34	mm 57	25,4	200	62,5	14,35	75,5	49	180	105	2,79	38,1	31,75	3,94	6,25	6	50	14	19	kg 2,07	GE2SXC1L011A000	
		Psi 5000	inch 2,24	1,00	7,87	2,46	0,56	2,97	1,93	7,09	4,13	0,11	1,50	1,25	0,16	0,25	0,24	1,97	0,55	0,75	lb 4,56		
GES3	25	MPa 34	mm 65	29,5	215	66,5	14,35	83,5	55	180	112,6	2,79	44,45	39,62	3,94	6,25	6	50	14	25	kg 2,79	GE2SXC2L011A000	
		Psi 5000	inch 2,56	1,16	8,46	2,62	0,56	3,29	2,17	7,09	4,43	0,11	1,75	1,56	0,16	0,25	0,24	1,97	0,55	0,98	lb 6,15		

■ Size only for carbon steel valves with fixing holes included.

## GES SAE J518 S6000

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	L	ØM	ØP	Q	ØK*	W*	X*	SW	ØLW	WEIGHT	ITEM CODE			
			MPa	34	mm	43	19,7	151,5	48,4	11	57	37	110	99,5	2,79	31,6	25,4	3,94	5,25	5	36	9	13	kg	0,956
GES6	13	MPa 34	inch	1,69	0,78	5,96	1,91	0,43	2,24	1,46	4,33	3,92	0,11	1,24	1,00	0,16	0,21	0,20	1,42	0,35	0,51	lb	2,11		
		Psi 6000																							
GES6	20	MPa 34	mm	55	25,4	174	62,5	14	75,5	45	180	106,5	2,79	41,3	31,75	3,94	6,25	6	50	14	20	kg	1,792	GE2SSC74011A000	GE2SSC74044A000
		Psi 5800	inch	2,17	1,00	6,85	2,46	0,55	2,97	1,77	7,09	4,19	0,11	1,63	1,25	0,16	0,25	0,24	1,97	0,55	0,79	lb	3,95		
GES6	25	MPa 34	mm	65	29,5	198	66,5	14	83,5	55	180	116,5	2,79	47,8	39,2	3,94	6,25	6	50	14	25	kg	2,759	GE2SSC83011A000	GE2SSC83044A000
		Psi 5000	inch	2,56	1,16	7,80	2,62	0,55	3,29	2,17	7,09	4,59	0,11	1,88	1,54	0,16	0,25	0,24	1,97	0,55	0,98	lb	6,08		

■ Size only for carbon steel valves with fixing holes included.

## GES6 SAE J518 S6000 EXTRA LONG

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	L	ØM	ØP	Q	ØK*	W*	X*	SW	ØLW	WEIGHT	ITEM CODE			
			MPa	34	mm	43	19,7	180	48,4	11,1	57,25	37	110	97	2,79	31,75	25,4	3,94	5,25	5	36	9	13	kg	1,05
GES6	13	MPa 34	inch	1,69	0,78	7,09	1,91	0,44	2,25	1,46	4,33	3,82	0,11	1,25	1,00	0,16	0,21	0,20	1,42	0,35	0,51	lb	2,31		
		Psi 6000																							
GES6	20	MPa 40	mm	57	25,4	200	62,5	14,35	75,5	49	180	105	2,79	41,3	31,75	3,94	6,25	6	50	14	19	kg	2,11	GE2SXC74011A000	GE2SXC74011A000
		Psi 5800	inch	2,24	1,00	7,87	2,46	0,56	2,97	1,93	7,09	4,13	0,11	1,63	1,25	0,16	0,25	0,24	1,97	0,55	0,75	lb	4,65		
GES6	25	MPa 34	mm	65	29,5	250	66,5	14,35	83,5	55	180	112,6	2,79	47,63	39,62	3,94	6,25	6	50	14	25	kg	3,07	GE2SXC83011A000	GE2SXC83011A000
		Psi 5000	inch	2,56	1,16	9,84	2,62	0,56	3,29	2,17	7,09	4,43	0,11	1,88	1,56	0,16	0,25	0,24	1,97	0,55	0,98	lb	6,77		

■ Size only for carbon steel valves with fixing holes included.



# ■ GEF-S

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0


### **CS Carbon Steel**

- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: ISO6162-1/-2  
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: from -20°C  
to +100°C

### **SS Stainless Steel**

- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: ISO6162-1/-2  
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: from -30°C  
to +100°C

### ■ STANDARD COMPOSITION OF VALVE

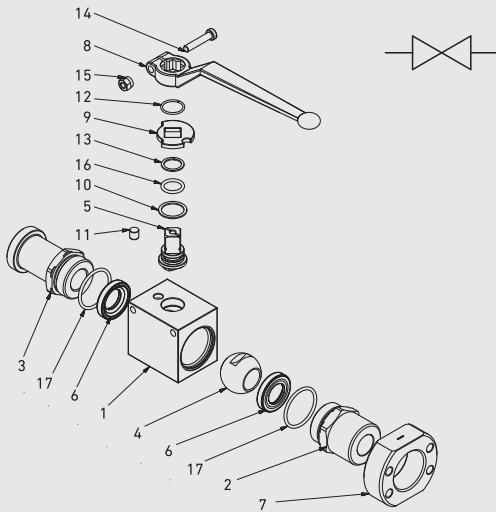

POS	DESCRIPTION	Q.TY	CS	SS	
			Carbon Steel	MATERIAL	Stainless Steel
1	Body	1		1,4404	
2	Adapter	2		1,4404	
3	Ball	1	1,0737	1,4404	
4	Stem	1	1,0737	1,4404	
5	Ball seat	2	POM	POM	
6	Handle	1	ZINC	ZINC	
7	Washer	1	1,0116	1,4301	
8	Washer	1	1,0116	1,4301	
9	Flange	2	1,0737	1,4404	
10	Stem ring	1	POM	POM	
11	Pin	1	1,0737	1,4301	
12	Seeger	1	1,4301	1,4301	
13	Adapter o-ring	2	NBR	NBR	
14	Stem o-ring	1	NBR	NBR	
15	Screw	1	Din 6921 8.8	Din 6921 A2	



## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GE 2-way

Ends \_\_\_\_\_

Valves      Valves  
dimension   dimension  
of pressure   of pressure  
(PSI) F3/S3   (PSI) F6/S6

S3000      S6000

Size \_\_\_\_\_

from DN13 to DN25

Body Material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Stem material \_\_\_\_\_

- 1 = 1,0737   4 = 1,4404\*
- 4 = 1,4404

Ball Material \_\_\_\_\_

- 1 = 1,0737   4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM   D = PEEK\*   G = PA612\*   K = GEMPTFE\*   C = PTFE\*


Seal material \_\_\_\_\_

B = NBR   E = FKM\*   F = EPDM\*   L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN6000 Psi
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

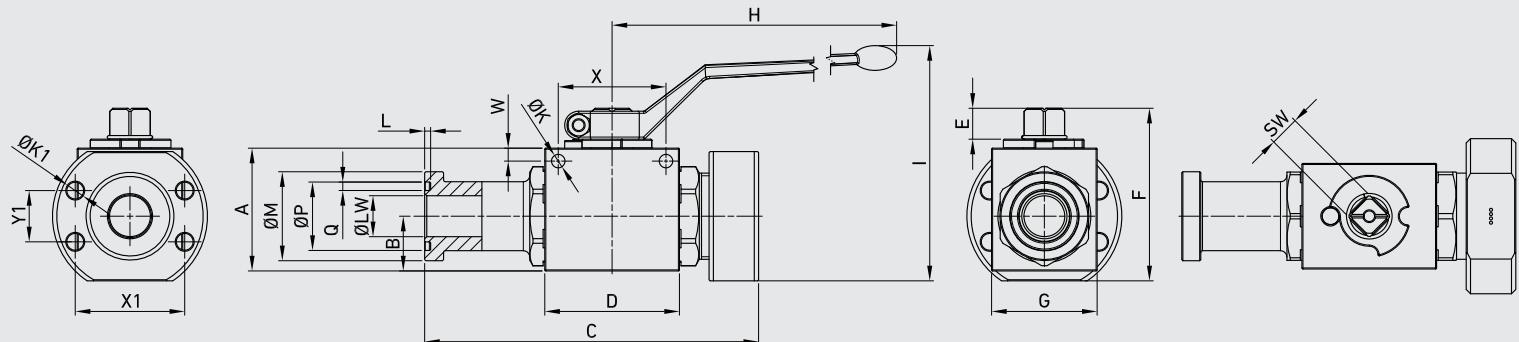

## GEFS3

**CS** Carbon Steel    **SS** Stainless Steel

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	L	ØK1	ØM	ØP	Q	ØK*	W*	X*	X1	Y1	ØLW	SW	WEIGHT	ITEM CODE
GEFS3	13	MPa 34,5 Psi 5000	mm 43 19,7 135,7 48,4	inch 1,69 0,77 5,34 1,91	11,1 0,44 2,42 1,46	61,5 4,33 3,98	37 0,11	110 1,42	101 1,46	2,79 4,33	3,98 0,11	M8	30,2 1,19	25,4 1,00	3,94 0,16	5,25 0,21	5 0,20	36 1,42	38,1 1,50	17,5 0,69	13 0,51	kg 0,35	lb 2,70	GE2SFC0L011A000	GE2SFC0L044A000
GEFS3	20	MPa 34,5 Psi 5000	mm 57 25,4 149 62,5 14,35	inch 2,24 1,00 5,87 2,46	80,1 0,56 3,15	193 1,93	49 7,09	180 4,29	109 0,11	2,79 4,29	3,98 0,11	M10	38,1 1,50	31,75 1,25	3,94 0,16	6,25 0,25	6 0,24	50 1,97	47,6 1,87	22,2 0,87	19 0,75	kg 0,55	lb 5,18	GE2SFC1L011A000	GE2SFC1L044A000
GEFS3	25	MPa 34,5 Psi 5000	mm 65 29,5 163 66,5 14,35	inch 2,56 1,16 6,42 2,62	89 0,56 3,50	2,17 7,09	55 4,65	180 0,11	118 2,79	2,79 4,65	3,98 0,11	M10	44,45 1,75	39,62 1,56	3,94 0,16	6,25 0,25	6 0,24	50 1,97	52,4 2,06	26,2 1,03	25 0,98	kg 0,55	lb 7,09	GE2SFC2L011A000	GE2SFC2L044A000

Size only for carbon steel valves with fixing holes included.

## GEFS3 U

**CS** Carbon Steel    **SS** Stainless Steel

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	L	ØK1	ØM	ØP	Q	ØK*	W*	X*	X1	Y1	ØLW	SW	WEIGHT	ITEM CODE
GEFS3	13	MPa 34,5 Psi 5000	mm 43 19,7 135,7 48,4	inch 1,69 0,77 5,34 1,91	11,1 0,44 2,42 1,46	61,5 4,33 3,98	37 0,11	110 1,42	101 1,46	2,79 4,33	3,98 0,11	UNC	30,2 1,19	25,4 1,00	3,94 0,16	5,25 0,21	5 0,20	36 1,42	38,1 1,50	17,5 0,69	13 0,51	kg 0,35	lb 2,70	GE2SOC0L011A000	GE2SOC0L044A000
GEFS3	20	MPa 34,5 Psi 5000	mm 57 25,4 149 62,5 14,35	inch 2,24 1,00 5,87 2,46	80,1 0,56 3,15	193 1,93	49 7,09	180 4,29	109 0,11	2,79 4,29	3,98 0,11	UNC	38,1 1,50	31,75 1,25	3,94 0,16	6,25 0,25	6 0,24	50 1,97	47,6 1,87	22,2 0,87	19 0,75	kg 0,55	lb 5,18	GE2SOC1L011A000	GE2SOC1L044A000
GEFS3	25	MPa 34,5 Psi 5000	mm 65 29,5 163 66,5 14,35	inch 2,56 1,16 6,42 2,62	89 0,56 3,50	2,17 7,09	55 4,65	180 0,11	118 2,79	2,79 4,65	3,98 0,11	UNC	44,45 1,75	39,62 1,56	3,94 0,16	6,25 0,25	6 0,24	50 1,97	52,4 2,06	26,2 1,03	25 0,98	kg 0,55	lb 7,09	GE2SOC2L011A000	GE2SOC2L044A000

Size only for carbon steel valves with fixing holes included.

## GEFS6

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	L	ØK1	ØM	ØP	Q	ØK*	W*	X*	X1	Y1	ØLW	SW	WEIGHT	ITEM CODE		
																									CS	SS	
GEFS6	13	MPa 41,4 Psi 6000	mm 43 19,7 135,8 48,4 11,1 61,5 37 110 101 2,79	inch 1,69 0,77 5,34 1,91 0,44 2,42 1,46 4,33 3,98 0,11	M8	31,75 25,4 3,94 5,25 5 36 40,5 18,2 13	1,25 1,00 0,16 0,21 0,20 1,42 1,59 0,72 0,51	kg 1,217 lb 2,68	GE2SFC6G011A000	GE2SFC6G044A000																	
GEFS6	20	MPa 41,4 Psi 6000	mm 57 25,4 155 62,5 14,35 80,1 49 180 109 2,79	inch 2,24 1,00 6,10 2,46 0,56 3,15 1,93 7,09 4,29 0,11	M10	41,3 31,75 3,94 6,25 6 50 50,8 23,8 19	1,63 1,25 0,16 0,25 0,24 1,97 2,00 0,94 0,75	kg 2,273 lb 5,01	GE2SFC74011A000	GE2SFC74044A000																	
GEFS6	25	MPa 41,4 Psi 6000	mm 65 29,5 173 66,5 14,35 89 55 180 118 2,79	inch 2,56 1,16 6,81 2,62 0,56 3,50 2,17 7,09 4,65 0,11	M12	47,63 39,62 3,94 6,25 6 50 57,2 27,8 25	1,88 1,56 0,16 0,25 0,24 1,97 2,25 1,09 0,98	kg 3,309 lb 7,30	GE2SFC83011A000	GE2SFC83044A000																	

■ Size only for carbon steel valves with fixing holes included.

## GEFS6 U

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	L	ØK1	ØM	ØP	Q	ØK*	W*	X*	X1	Y1	ØLW	SW	WEIGHT	ITEM CODE		
																									CS	SS	
GEFS6	13	MPa 41,4 Psi 6000	mm 43 19,7 135,8 48,4 11,1 61,5 37 110 101 2,79	inch 1,69 0,77 5,34 1,91 0,44 2,42 1,46 4,33 3,98 0,11	UNC	31,75 25,4 3,94 5,25 5 36 40,5 18,2 13	1,25 1,00 0,16 0,21 0,20 1,42 1,59 0,72 0,51	kg 1,217 lb 2,68	GE2SOC6G011A000	GE2SOC6G044A000																	
GEFS6	20	MPa 41,4 Psi 6000	mm 57 25,4 155 62,5 14,35 80,1 49 180 109 2,79	inch 2,24 1,00 6,10 2,46 0,56 3,15 1,93 7,09 4,29 0,11	UNC	41,3 31,75 3,94 6,25 6 50 50,8 23,8 19	1,63 1,25 0,16 0,25 0,24 1,97 2,00 0,94 0,75	kg 2,273 lb 5,01	GE2SOC74011A000	GE2SOC74044A000																	
GEFS6	25	MPa 41,4 Psi 6000	mm 65 29,5 173 66,5 14,35 89 55 180 118 2,79	inch 2,56 1,16 6,81 2,62 0,56 3,50 2,17 7,09 4,65 0,11	UNC	47,63 39,62 3,94 6,25 6 50 57,2 27,8 25	1,88 1,56 0,16 0,25 0,24 1,97 2,25 1,09 0,98	kg 3,309 lb 7,30	GE2SOC83011A000	GE2SOC83044A000																	

■ Size only for carbon steel valves with fixing holes included.



# GB1

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0


### CS Carbon Steel

- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: BSP-NPT-SAE
- Pressure: up to PN420
- Temp range: from -30°C to +100°C (body -46°C)

### SS Stainless Steel

- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: BSP-NPT-SAE
- Pressure: up to PN420
- Temp range: from -30°C to +100°C (body -46°C)

### STANDARD COMPOSITION OF VALVE

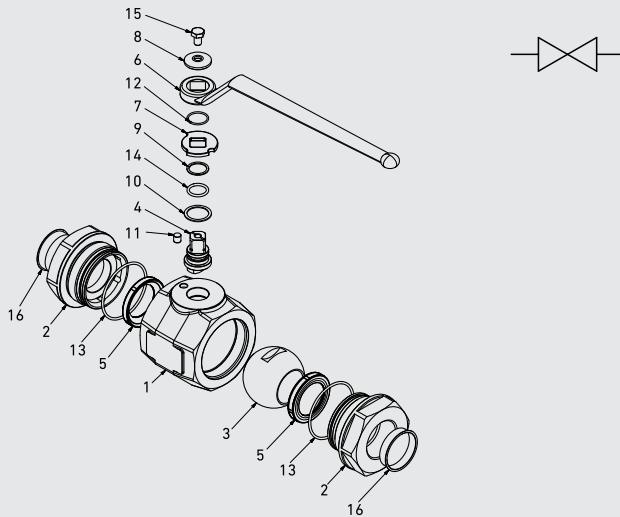

POS	DESCRIPTION	Q.TY	CS	SS
			Carbon Steel	Stainless Steel
1	Body	1	1,0570	1,4404
2	Adapter	2	1,0570	1,4404
3	Ball	1	1,0737	1,4404
4	Stem	1	1,0737	1,4301
5	Ball seat	2	POM	POM
6	Handle	1	1,0116	1,4031
7	Washer	1	1,0116	1,4031
8	Washer	1	1,0737	1,4031
9	Back-up	1	PTFE	PTFE
10	Stem ring	1	POM	POM
11	Pin	1	1,0737	1,4404
12	Seeger	1	1,4301	1,4301
13	Adapter o-ring	4	NBR	NBR
14	Stem o-ring	1	NBR	NBR
15	Screw	1	ISO4017 8.8	ISO4017 A2
16	Caps	2	PVC	PVC



## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GB1 2-way

Ends \_\_\_\_\_

GAS DIN/	NPT ANSI	SAE
ISO 228	/ASME	J1926-1
BSP	B1.20.1	
G 1 1/4	N 1 1/4	SAE20
G 1 1/2	N 1 1/2	SAE24
G 2	N 2	SAE32

Size \_\_\_\_\_

from DN32 to DN50

Body Material \_\_\_\_\_

- L = 1,0570
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Stem material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Ball Material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request


- Reduced bore
- Special threads
- Pressure class up to PN42 MPa
- Pneumatic and electrical actuator
- Security block
- Locking device

For further special requests please consult our technical/commercial service.

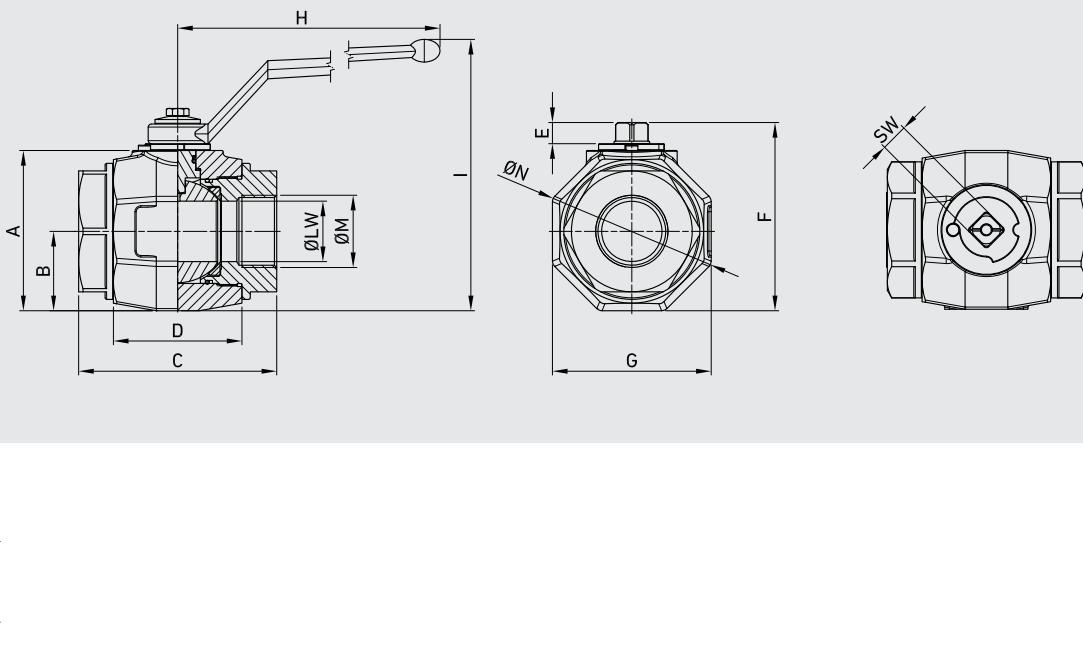


### GB1 DIN/ISO 228 BSP

TYPE	DN	PN	A	B	C	D	E	F	ØN	H	I	ØM	G	SW	ØLW	WEIGHT	ITEM CODE	
																	CS Carbon Steel	SS Stainless Steel
GB1 G 1 1/4	32	MPa 42	mm 89	42,5	115	75	14	107,5	92	310	162,5	G 1	85	17	32	kg 4,489	GB1GGT6G0L1A000	GB1GGT6G044A000
		Psi 6090	inch 3,50	1,67	4,53	2,95	0,55	4,23	3,62	12,20	6,40	1/4	3,35	0,67	1,26	lb 9,90		
GB1 G 1 1/2	40	MPa 42	mm 106	52,5	131	85	14	124,5	113	310	179,5	G 1	105	17	40	kg 6,750	GB1GGT7G0L1A000	GB1GGT7G044A000
		Psi 6090	inch 4,17	2,07	5,16	3,35	0,55	4,90	4,45	12,20	7,07	1/2	4,13	0,67	1,57	lb 14,88		
GB1 G 2	50	MPa 42	mm 115,5	58,5	140	97,85	14	134	126	310	189	G 2	117	17	50	kg 8,708	GB1GGT8G0L1A000	GB1GGT8G044A000
		Psi 6090	inch 4,55	2,30	5,51	3,85	0,55	5,28	4,96	12,20	7,44		4,61	0,67	1,97	lb 19,20		



## GB1 ANSI/ASME B1.20.1 NPT

TYPE	DN	PN														ITEM CODE	CS Carbon Steel	SS Stainless Steel
			A	B	C	D	E	F	ØN	H	I	ØM	G	SW	ØLW	WEIGHT		
GB1 N 1 1/4	32	MPa 42	mm 89	42,5	115	75	14	107,5	92	310	162,5	N 1	85	17	32	kg 4,489	GB1NNT6G0L1A000	GB1NNT6G044A000
		Psi 6090	inch 3,50	1,67	4,53	2,95	0,55	4,23	3,62	12,20	6,40	1/4	3,35	0,67	1,26	lb 9,90		
GB1 N 1 1/2	40	MPa 42	mm 106	52,5	131	85	14	124,5	113	310	179,5	N 1	105	17	40	kg 6,774	GB1NNT7G0L1A000	GB1NNT7G044A000
		Psi 6090	inch 4,17	2,07	5,16	3,35	0,55	4,90	4,45	12,20	7,07	1/2	4,13	0,67	1,57	lb 14,93		
GB1 N 2	50	MPa 42	mm 115,5	58,5	140	97,85	14	134	126	310	189	N 2	117	17	50	kg 8,708	GB1NNT8G0L1A000	GB1NNT8G044A000
		Psi 6090	inch 4,55	2,30	5,51	3,85	0,55	5,28	4,96	12,20	7,44		4,61	0,67	1,97	lb 19,20		



## GB1 SAE J1926-1

TYPE	DN	PN														ITEM CODE	CS Carbon Steel	SS Stainless Steel
			A	B	C	D	E	F	ØN	H	I	ØM	G	SW	ØLW	WEIGHT		
GB1 SAE20	32	MPa 42	mm 89	42,5	115	75	14	107,5	92	310	162,5	1 5/8	85	17	32	kg 4,489	GB1EEE5G0L1A000	GB1EEE5G044A000
		Psi 6090	inch 3,50	1,67	4,53	2,95	0,55	4,23	3,62	12,20	6,40	UNF	3,35	0,67	1,26	lb 9,90		
GB1 SAE24	40	MPa 42	mm 106	52,5	131	85	14	124,5	113	310	179,5	1 7/8	105	17	40	kg 6,822	GB1EEE6G0L1A000	GB1EEE6G044A000
		Psi 6090	inch 4,17	2,07	5,16	3,35	0,55	4,90	4,45	12,20	7,07	UNF	4,13	0,67	1,57	lb 15,04		
GB1 SAE32	50	MPa 42	mm 115,5	58,5	140	97,85	14	134	126	310	189	1 1/2	117	17	50	kg 8,708	GB1EEE7G0L1A000	GB1EEE7G044A000
		Psi 6090	inch 4,55	2,30	5,51	3,85	0,55	5,28	4,96	12,20	7,44	UNF	4,61	0,67	1,97	lb 19,20		



# GB3

## 3-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0


### CS Carbon Steel

- Type: ball valve 3 way
- Sizes: from DN32 up to DN50
- Ends: BSP-NPT
- Pressure: up to PN350
- Temp range: from -20°C to +100°C


### SS Stainless Steel

- Type: ball valve 3 way
- Sizes: from DN32 up to DN50
- Ends: BSP-NPT
- Pressure: up to PN350
- Temp range: from -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

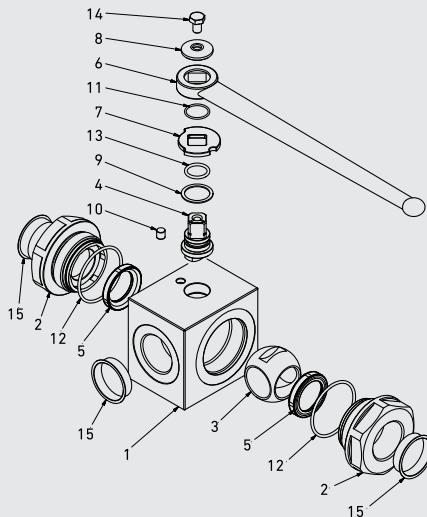

**WARNING!**  
Pressure inlet only  
from center port 1



POS	DESCRIPTION	Q.TY	CS	SS
			Carbon Steel	MATERIAL
1	Body	1	1,0570	1,4404
2	Adapter	2	1,0570	1,4404
3	Ball	1	1,0737	1,4404
4	Stem	1	1,0737	1,4404
5	Ball seat	2	POM	POM
6	Handle	1	1,0116	1,4301
7	Washer	1	1,0116	1,4301
8	Washer	1	1,0116	1,4301
9	Stem ring	1	POM	POM
10	Pin	1	1,0737	1,4301
11	Seeger	1	1,4301	1,4301
12	Adapter o-ring	4	NBR	NBR
13	Stem o-ring	1	NBR	NBR
14	Screw	1	ISO4017 8.8	ISO4017 A2
15	Caps	3	PVC	PVC



## CODE DESCRIPTION STRUCTURE

**GB3 G1 1/2 DN40 2 2 1 1 A B**

Type and way of valve \_\_\_\_\_

GB3 3-way

Ends \_\_\_\_\_

GAS DIN/ NPT ANSI

ISO 228 /ASME

BSP B1.20.1

G1 1/4 N1 1/4

G1 1/2 N1 1/2

G2 N2

Size \_\_\_\_\_

from DN32 to DN50

Body Material \_\_\_\_\_

● 2 = 1,0570

● 4 = 1,4404

Adapter material \_\_\_\_\_

● 2 = 1,0570

● 4 = 1,4404

Stem material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

● 4 = 1,4404

Ball Material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

● 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*



Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request


- Reduced bore
- Special threads
- Pressure class up to PN35 MPa
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

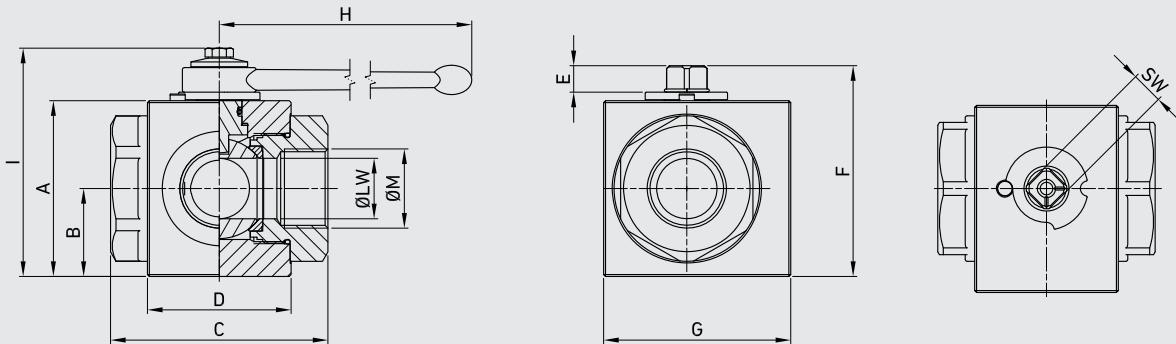



### GB3 DIN/ISO 228 8SP

TYPE	DN	PN		ITEM CODE														
				A	B	C	D	E	F	G	H	I	ØM	SW	ØLW	WEIGHT	CS Carbon Steel	SS Stainless Steel
GB3 G1 1/4	32	MPa 35	mm 93 46,5 115 75 13,5 111,5 99 300 120,5										G 1 1/4	17	32	kg 5,725	GB3GGT63021A000	GB3GGT63044A000
		Psi 5075	inch 3,66 1,83 4,53 2,95 0,53 4,39 3,90 11,81 4,74											0,67	1,26	lb 12,62		
GB3 G1 1/2	40	MPa 35	mm 107 53,5 131 85 13,5 125,5 115 300 134,5										G 1 1/2	17	40	kg 8,632	GB3GGT73021A000	GB3GGT73044A000
		Psi 5075	inch 4,21 2,11 5,16 3,35 0,53 4,94 4,53 11,81 5,30											0,67	1,57	lb 19,03		
GB3 G 2	50	MPa 35	mm 114 57 140 98 13,5 132,5 128 300 141,5										G 2	17	50	kg 10,607	GB3GGT83021A000	GB3GGT83044A000
		Psi 5075	inch 4,49 2,24 5,51 3,86 0,53 5,22 5,04 11,81 5,57											0,67	1,97	lb 23,38		



### GB3 ANSI/ASME B1.20.1 NPT


TYPE	DN	PN		ITEM CODE														
				A	B	C	D	E	F	G	H	I	ØM	SW	ØLW	WEIGHT	CS Carbon Steel	SS Stainless Steel
GB3 N 1 1/4	32	MPa 35	mm 93 46,5 115 75 13,5 111,5 99 300 120,5										N 1 1/4	17	32	kg 5,725	GB3NNT63021A000	GB3NNT63044A000
		Psi 5075	inch 3,66 1,83 4,53 2,95 0,53 4,39 3,90 11,81 4,74											0,67	1,26	lb 12,62		
GB3 N 1 1/2	40	MPa 35	mm 107 53,5 131 85 13,5 125,5 115 300 134,5										N 1 1/2	17	40	kg 8,632	GB3NNT73021A000	GB3NNT73044A000
		Psi 5075	inch 4,21 2,11 5,16 3,35 0,53 4,94 4,53 11,81 5,30											0,67	1,57	lb 19,03		
GB3 N 2	50	MPa 35	mm 114 57 140 98 13,5 132,5 128 300 141,5										N 2	17	50	kg 10,607	GB3NNT83021A000	GB3NNT83044A000
		Psi 5075	inch 4,49 2,24 5,51 3,86 0,53 5,22 5,04 11,81 5,57											0,67	1,97	lb 23,38		

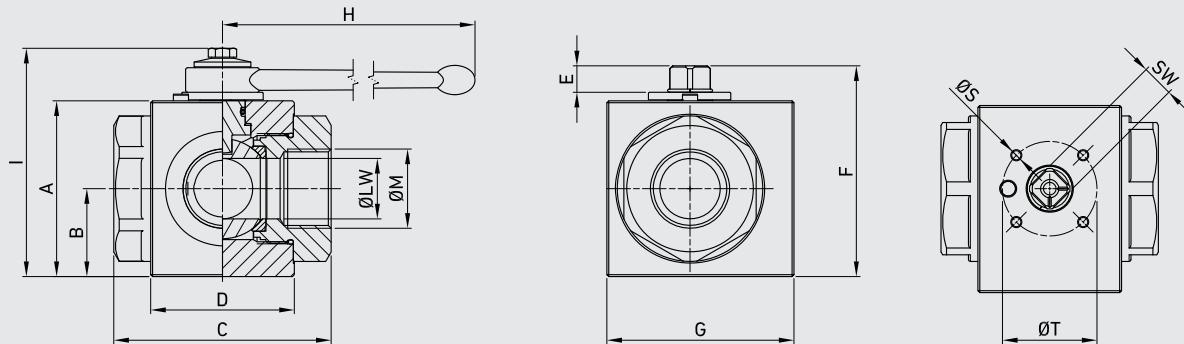

## GB3 DIN/ISO 228 BSP

Assembling threads per ISO5211

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	ØM	ØS	ØT	ISO5211	SW	ØLW	WEIGHT	ITEM CODE	CS Carbon Steel	SS Stainless Steel
GB3 G 1 1/4	32	MPa 35 Psi 5075	mm 93 inch 3,66	46,5 1,83	115 4,53	75 2,95	13,5 0,53	111,5 4,39	99 3,90	300 11,81	120,5 4,74	G 1 1/4	M6 1,97	50 F05	17 0,67	32 1,26	kg 5,725 lb 12,62	GB3GGT63021AF50	GB3GGT63044AF50		
GB3 G 1 1/2	40	MPa 35 Psi 5075	mm 107 inch 4,21	53,5 2,11	131 5,16	85 3,35	13,5 0,53	125,5 4,94	115 4,53	300 11,81	134,5 5,30	G 1 1/2	M6 1,97	50 F05	17 0,67	40 1,57	kg 8,632 lb 19,03	GB3GGT73021AF50	GB3GGT73044AF50		
GB3 G 2	50	MPa 35 Psi 5075	mm 114 inch 4,49	57 2,24	140 5,51	98 3,86	13,5 0,53	132,5 5,22	128 5,04	300 11,81	141,5 5,57	G 2 N 2	M6 1,97	50 F05	17 0,67	50 1,97	kg 10,607 lb 23,38	GB3GGT83021AF50	GB3GGT83044AF50		



## GB3 ANSI/ASME B1.20.1 NPT

Assembling threads per ISO5211

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	ØM	ØS	ØT	ISO5211	SW	ØLW	WEIGHT	ITEM CODE	CS Carbon Steel	SS Stainless Steel
GB3 N 1 1/4	32	MPa 35 Psi 5075	mm 93 inch 3,66	46,5 1,83	115 4,53	75 2,95	13,5 0,53	111,5 4,39	99 3,90	300 11,81	120,5 4,74	N 1 1/4	M6 1,97	50 F05	17 0,67	32 1,26	kg 5,725 lb 12,62	GB3NNT63021AF50	GB3NNT63044AF50		
GB3 N 1 1/2	40	MPa 35 Psi 5075	mm 107 inch 4,21	53,5 2,11	131 5,16	85 3,35	13,5 0,53	125,5 4,94	115 4,53	300 11,81	134,5 5,30	N 1 1/2	M6 1,97	50 F05	17 0,67	40 1,57	kg 8,632 lb 19,03	GB3NNT73021AF50	GB3NNT73044AF50		
GB3 N 2	50	MPa 35 Psi 5075	mm 114 inch 4,49	57 2,24	140 5,51	98 3,86	13,5 0,53	132,5 5,22	128 5,04	300 11,81	141,5 5,57	N 2 N 2	M6 1,97	50 F05	17 0,67	50 1,97	kg 10,607 lb 23,38	GB3NNT83021AF50	GB3NNT83044AF50		



# GBF

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0


### Carbon Steel

- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: ISO6162-1/-2,  
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: from -30°C  
to +100°C (body -46°C)

### Stainless Steel

- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: ISO6162-1/-2,  
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: from -30°C  
to +100°C (body -46°C)

### STANDARD COMPOSITION OF VALVE

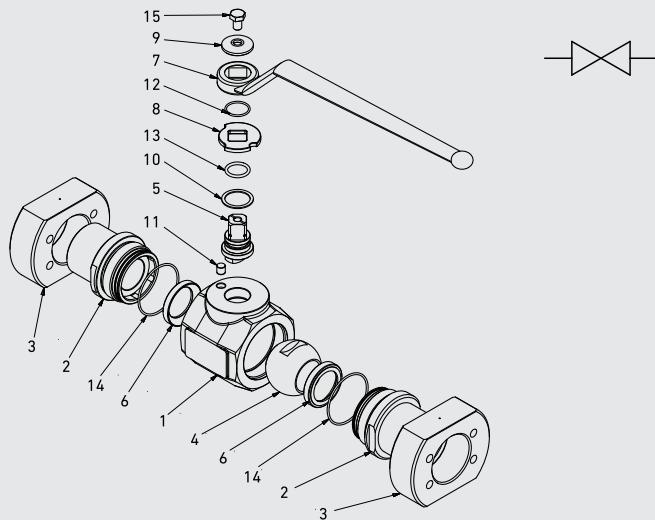

POS	DESCRIPTION	Q.TY	CS	SS	
			Carbon Steel	MATERIAL	Stainless Steel
1	Body	1		1,0570	1,4404
2	Adapter	2		1,0570	1,4404
3	Ball	1		1,0737	1,4404
4	Stem	1		1,0737	1,4301
5	Ball seat	2	POM		POM
6	Handle	1	1,0116		1,4301
7	Washer	1	1,0116		1,4301
8	Washer	1	1,0737		1,4301
9	Flange	2	1,0570		1,4044
10	Stem ring	1	POM		POM
11	Pin	1	1,0737		1,4301
12	Seeger	1	1,4301		1,4301
13	Adapter o-ring	4	NBR		NBR
14	Stem o-ring	1	NBR		NBR
15	Screw	1	ISO4017 8.8		ISO4017 A2



## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GB 2-way

Ends \_\_\_\_\_

Valves      Valves  
dimension   dimension  
of pressure   of pressure  
(PSI) F3      (PSI) F6

S3000      S6000

Size \_\_\_\_\_

from DN32 to DN50

Body Material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Stem material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Ball Material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN5000 Psi
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

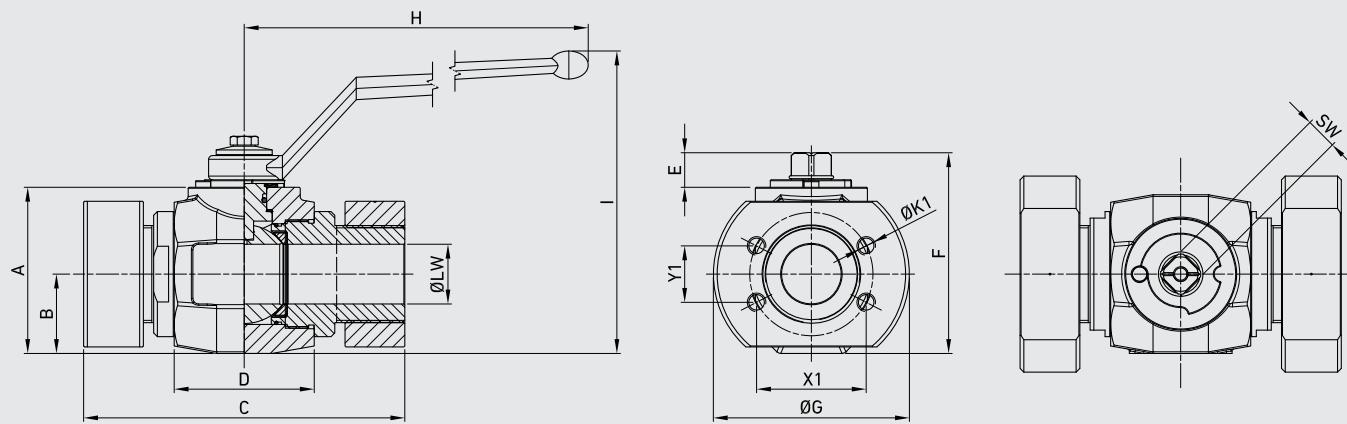

## GBF SAE J518 S3000

TYPE	DN	PN		A	B	C	D	E	F	ØG	H	I	ØK1	X1	Y1	SW	ØLW	WEIGHT	ITEM CODE	
																			CS Carbon Steel	SS Stainless Steel
GBF3	32	MPa 27,6	mm 89 42,5 172 75 14 107,5 105 310 162										M10	58,7 30,2 17 32	kg 8,102		GB2FFC3L021A000	GB2FFC3L044A000		
		Psi 3000	inch 3,50 1,67 6,77 2,95 0,55 4,23 4,13 12,20 6,38															lb 17,86		
GBF3	40	MPa 20,7	mm 106 52,5 176,5 85 14 124,5 120 310 180										M12	69,8 35,7 17 40	kg 11,142		GB2FFC4L021A000	GB2FFC4L044A000		
		Psi 3000	inch 4,17 2,07 6,95 3,35 0,55 4,90 4,72 12,20 7,09															lb 24,56		
GBF3	50	MPa 20,7	mm 115,5 58,5 196 98 14 134 145 310 190										M12	77,8 42,9 17 50	kg 15,343		GB2FFC5L021A000	GB2FFC5L044A000		
		Psi 3000	inch 4,55 2,30 7,72 3,86 0,55 5,28 5,71 12,20 7,48															lb 33,83		

## GBF SAE J518 S3000 UNC

TYPE	DN	PN		A	B	C	D	E	F	ØG	H	I	ØK1	X1	Y1	SW	ØLW	WEIGHT	ITEM CODE	
																			CS Carbon Steel	SS Stainless Steel
GBF3	32	MPa 27,6	mm 89 42,5 172 75 14 107,5 98 310 163										7/16-14	58,7 30,2 17 32	kg 8,102		GB2FUC3L021A000	GB2FUC3L044A000		
		Psi 3000	inch 3,50 1,67 6,77 2,95 0,55 4,23 3,86 12,20 6,42															lb 17,86		
GBF3	40	MPa 20,7	mm 106 52,5 176,5 85 14 124,5 113 310 180										1/2-13	69,8 35,7 17 40	kg 11,142		GB2FUC4L021A000	GB2FUC4L044A000		
		Psi 3000	inch 4,17 2,07 6,95 3,35 0,55 4,90 4,45 12,20 7,09															lb 24,56		
GBF3	50	MPa 20,7	mm 115,5 58,5 196 98 14 134 123 310 190										1/2-13	77,8 42,9 17 50	kg 15,343		GB2FUC5L021A000	GB2FUC5L044A000		
		Psi 3000	inch 4,55 2,30 7,72 3,86 0,55 5,28 4,84 12,20 7,48															lb 33,83		

**GBF SAE J518 S6000**

TYPE	DN	PN		A	B	C	D	E	F	ØG	H	I	ØK1	X1	Y1	SW	ØLW	WEIGHT	ITEM CODE		
				mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb		
GBF6	32	MPa	41,3	mm	89	42,5	172	75	14	107,5	98	310	160	M12	66,7	31,8	17	32	kg 8,102	GB2FFC93021A000	GB2FFC93044A000
		Psi	6000	inch	3,50	1,67	6,77	2,95	0,55	4,23	3,86	12,20	6,30		2,63	1,25	0,67	1,26	lb 17,86		
GBF6	40	MPa	41,33	mm	106	52,5	176,5	85	14	124,5	113	310	180	M16	79,4	36,5	17	40	kg 11,142	GB2FFCA3021A000	GB2FFCA3044A000
		Psi	6000	inch	4,17	2,07	6,95	3,35	0,55	4,90	4,45	12,20	7,09		3,13	1,44	0,67	1,57	lb 24,56		
GBF6	50	MPa	41,3	mm	115,5	58,5	196	98	14	134	123	310	190	M20	96,8	44,5	17	50	kg 15,343	GB2FFCB3021A000	GB2FFCB3044A000
		Psi	6000	inch	4,55	2,30	7,72	3,86	0,55	5,28	4,84	12,20	7,48		3,81	1,75	0,67	1,97	lb 33,83		

**GBF SAE J518 S6000 UNC**

TYPE	DN	PN		A	B	C	D	E	F	ØG	H	I	ØK1	X1	Y1	SW	ØLW	WEIGHT	ITEM CODE		
				mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb		
GBF6	32	MPa	41,3	mm	89	42,5	172	75	14	107,5	98	310	163	1/2-13	66,7	31,8	17	32	kg 8,102	GB2FUC93021A000	GB2FUC93044A000
		Psi	6000	inch	3,50	1,67	6,77	2,95	0,55	4,23	3,86	12,20	6,42	UNC	2,63	1,25	0,67	1,26	lb 17,86		
GBF6	40	MPa	41,3	mm	106	52,5	176,5	85	14	124,5	113	310	180	5/8-11	79,4	36,5	17	40	kg 11,142	GB2FUCA3021A000	GB2FUCA3044A000
		Psi	6000	inch	4,17	2,07	6,95	3,35	0,55	4,90	4,45	12,20	7,09	UNC	3,13	1,44	0,67	1,57	lb 24,56		
GBF6	50	MPa	41,3	mm	115,5	58,5	196	98	14	134	123	310	190	3/4-10	96,8	44,5	17	50	kg 15,343	GB2FUCB3021A000	GB2FUCB3044A000
		Psi	6000	inch	4,55	2,30	7,72	3,86	0,55	5,28	4,84	12,20	7,48	UNC	3,81	1,75	0,67	1,97	lb 33,83		



# GBS

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0


### CS Carbon Steel

- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: SAE J518
- Pressure: up to PN420 / S6000
- Temp range: from -30°C to +100°C (body -46°C)

### SS Stainless Steel

- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: SAE J518
- Pressure: up to PN420 / S6000
- Temp range: from -30°C to +100°C (body -46°C)

### STANDARD COMPOSITION OF VALVE

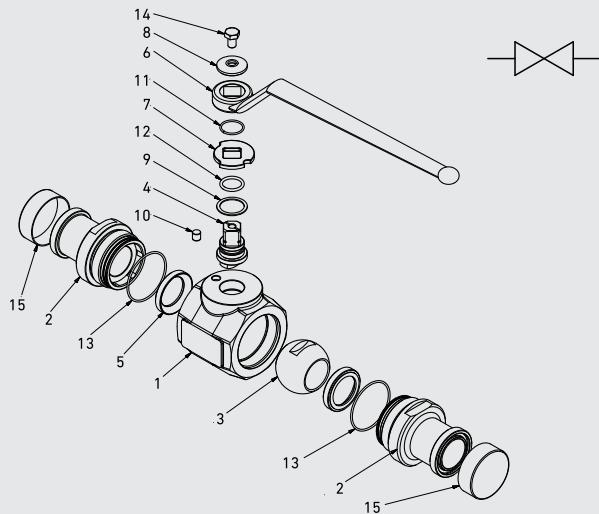

POS	DESCRIPTION	Q.TY	CS	SS	
			Carbon Steel	MATERIAL	Stainless Steel
1	Body	1		1,0570	1,4404
2	Adapter	2		1,0570	1,4404
3	Ball	1		1,0737	1,4404
4	Stem	1		1,0737	1,4404
5	Ball seat	2	POM		POM
6	Handle	1	1,0116		1,4301
7	Washer	1	1,0116		1,4301
8	Washer	1	1,0737		1,4301
9	Stem ring	1	POM		POM
10	Pin	1	1,0737		1,4301
11	Seeger	1	1,4301		1,4301
12	Adapter o-ring	4	NBR		NBR
13	Stem o-ring	1	NBR		NBR
14	Screw	1	ISO4017 8.8		ISO4017 A2
15	Caps	2	PVC		PVC



## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GB 2-way

Ends \_\_\_\_\_

Valves      Valves  
dimension   dimension  
of pressure   of pressure  
(PSI) F3      (PSI) F6

S3000      S6000

Size \_\_\_\_\_

from DN32 to DN50

Body Material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Stem material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Ball Material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN5000 Psi
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

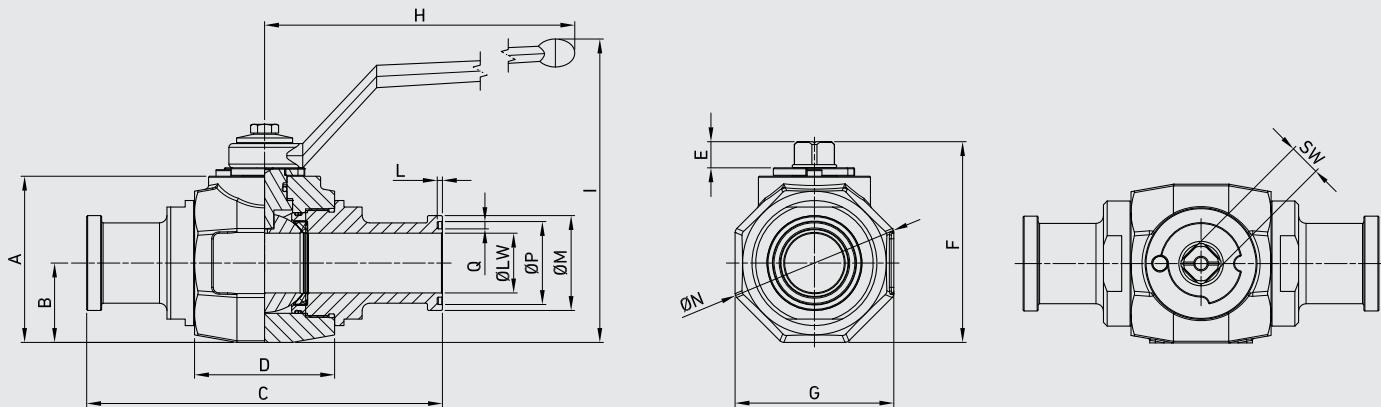

## GBS SAE J518 S3000

TYPE	DN	PN		ITEM CODE															
				A	B	C	D	E	F	G	H	I	L	ØM	ØN	ØP	Q	SW	ØLW
GBS3	32	MPa 27,5	mm 89 42,5 190,5 75 14 107,5 85 310 162,5 2,79 50,8 91,5 44,45 3,94 17 32	kg 5,429	GB2SSC3L021A000	GB2SSC3L044A000													
		Psi 3000	inch 3,50 1,67 7,50 2,95 0,55 4,23 3,35 12,20 6,40 0,11 2,00 3,60 1,75 0,16 0,67 1,26	lb 11,97															
GBS3	40	MPa 20,6	mm 106 52,5 230,5 85 14 124,5 105 310 180 2,79 60,26 112 53,72 3,94 17 40	kg 8,265	GB2SSC4L021A000	GB2SSC4L044A000													
		Psi 3000	inch 4,17 2,07 9,07 3,35 0,55 4,90 4,13 12,20 7,09 0,11 2,37 4,41 2,11 0,16 0,67 1,57	lb 18,22															
GBS3	50	MPa 20,6	mm 115,5 58,5 232 98 14 134 117 310 190 2,79 71,4 126 63,25 3,94 17 50	kg 9,865	GB2SSC5L021A000	GB2SSC5L044A000													
		Psi 3000	inch 4,55 2,30 9,13 3,86 0,55 5,28 4,61 12,20 7,48 0,11 2,81 4,96 2,49 0,16 0,67 1,97	lb 21,75															

## GBS3 SAE J518 S3000 EXTRA LONG

TYPE	DN	PN		ITEM CODE																CS Carbon Steel
				A	B	C	D	E	F	G	H	I	L	ØM	ØN	ØP	Q	SW	ØLW	WEIGHT
GBS3	32	MPa 27,5	mm 89 42,5 275 75 14 107,5 85 310 162,5 2,79 50,8 91,5 44,45 3,94 17 30	kg 5,206	GB2SXC3L021A000	GB2SXC3L044A000														
		Psi 3000	inch 3,50 1,67 10,83 2,95 0,55 4,23 3,35 12,20 6,40 0,11 2,00 3,60 1,75 0,16 0,67 1,18	lb 11,48																
GBS3	40	MPa 20,6	mm 106 52,5 321 85 14 124,5 105 310 180 2,79 60,33 112 53,72 3,94 17 38	kg 8,323	GB2SXC4L021A000	GB2SXC4L044A000														
		Psi 3000	inch 4,17 2,07 12,64 3,35 0,55 4,90 4,13 12,20 7,09 0,11 2,38 4,41 2,11 0,16 0,67 1,50	lb 18,35																
GBS3	50	MPa 20,6	mm 115,5 58,5 323 97,85 14 134 117 310 190 2,79 71,4 126 63,25 3,94 17 48	kg 10,097	GB2SXC5L021A000	GB2SXC5L044A000														
		Psi 3000	inch 4,55 2,30 12,72 3,85 0,55 5,28 4,61 12,20 7,48 0,11 2,81 4,96 2,49 0,16 0,67 1,89	lb 22,26																

## GBS SAE J518 S6000

TYPE	DN	PN		A	B	C	D	E	F	G	H	I	L	ØM	ØN	ØP	Q	SW	ØLW	WEIGHT	ITEM CODE										
				mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	GB2SSC93021A000	GB2SSC93044A000										
GBS6	32	MPa	41,3	mm 89	inch 3,50	42,5	1,67	223	8,78	75	2,95	14	0,55	107,5	4,23	85	3,35	310	12,20	162,5	2,79	54	91,5	44,45	3,94	17	32	kg 5,828	lb 12,85	GB2SSC93021A000	GB2SSC93044A000
		Psi	6000																												
GBS6	40	MPa	41,3	mm 106	inch 4,17	52,5	2,07	281	11,06	85	3,35	14	0,55	124,5	4,13	105	3,10	180	12,20	2,79	63,46	112	53,67	3,94	17	40	kg 8,251	lb 18,19	GB2SSCA3021A000	GB2SSCA3044A000	
		Psi	6000																												
GBS6	50	MPa	41,3	mm 115,5	inch 4,55	58,5	2,30	316	12,44	98	3,86	14	0,55	134	4,61	117	12,20	7,48	310	190	2,79	79,4	126	63,25	3,94	17	50	kg 11,774	lb 25,96	GB2SSCB3021A000	GB2SSCB3044A000
		Psi	6000																												

## GBS6 SAE J518 S6000 EXTRA LONG

TYPE	DN	PN		A	B	C	D	E	F	G	H	I	L	ØM	ØN	ØP	Q	SW	ØLW	WEIGHT	ITEM CODE									
				mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	GB2SXC93021A000	GB2SXC93044A000									
GBS6	32	MPa	41,3	mm 89	inch 3,50	42,5	1,67	322	12,68	75	2,95	14	0,55	107,5	4,23	85	3,35	12,20	6,40	0,11	2,13	3,60	1,75	0,16	0,67	1,26	kg 5,828	lb 12,85	GB2SXC93021A000	GB2SXC93044A000
		Psi	6000																											
GBS6	40	MPa	41,3	mm 106	inch 4,17	52,5	2,07	380	14,96	85	3,35	14	0,55	124,5	4,13	105	3,10	180	12,20	2,79	63,46	112	53,72	3,94	17	38	kg 8,47	lb 18,67	GB2SXCA3021A000	GB2SXCA3044A000
		Psi	6000																											
GBS6	50	MPa	41,3	mm 115,5	inch 4,55	58,5	2,30	385	15,16	97,85	3,86	14	0,55	134	4,61	117	12,20	7,48	0,11	3,13	4,96	2,49	0,16	0,67	1,89	kg 12,058	lb 26,58	GB2SXCB3021A000	GB2SXCB3044A000	
		Psi	6000																											



# GBF-S

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0


### CS Carbon Steel

- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: ISO6162-1/-2,  
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: from -30°C  
to +100°C (body -46°C)

### SS Stainless Steel

- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: ISO6162-1/-2,  
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: from -30°C  
to +100°C (body -46°C)

### STANDARD COMPOSITION OF VALVE

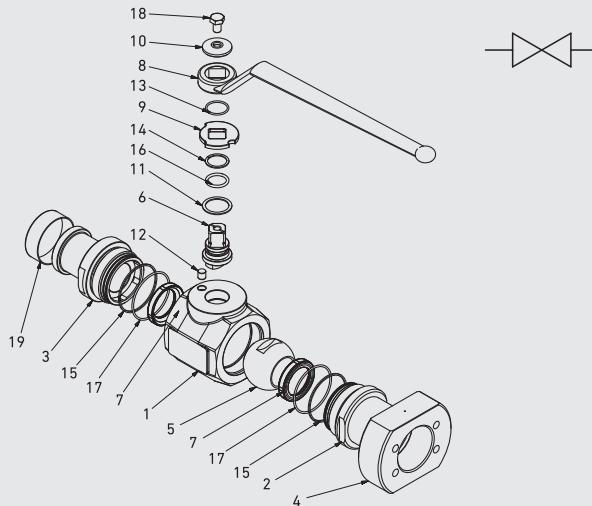

POS	DESCRIPTION	Q.TY	CS	SS	
			Carbon Steel	MATERIAL	Stainless Steel
1	Body	1		1,0570	1,4404
2	Adapter	2		1,0570	1,4404
3	Ball	1		1,0737	1,4404
4	Stem	1		1,0737	1,4301
5	Ball seat	2	POM		POM
6	Handle	1	1,0116		1,4301
7	Washer	1	1,0116		1,4301
8	Washer	1	1,0737		1,4301
9	Flange	2	1,0570		1,4044
10	Stem ring	1	POM		POM
11	Pin	1	1,0737		1,4301
12	Seeger	1	1,4301		1,4301
13	Adapter o-ring	4	NBR		NBR
14	Stem o-ring	1	NBR		NBR
15	Screw	1	ISO4017 8.8		ISO4017 A2



## CODE DESCRIPTION STRUCTURE

GB	F3-S3	DN32	2	2	1	1	A	B
----	-------	------	---	---	---	---	---	---

Type and way of valve \_\_\_\_\_

GB 2-way

Ends \_\_\_\_\_

Valves      Valves  
dimension    dimension  
of pressure   of pressure  
(PSI) F3/S3 (PSI) F6/S6

S3000      S6000

Size \_\_\_\_\_  
from DN32 to DN50

Body Material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Stem material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Ball Material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN5000 Psi
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

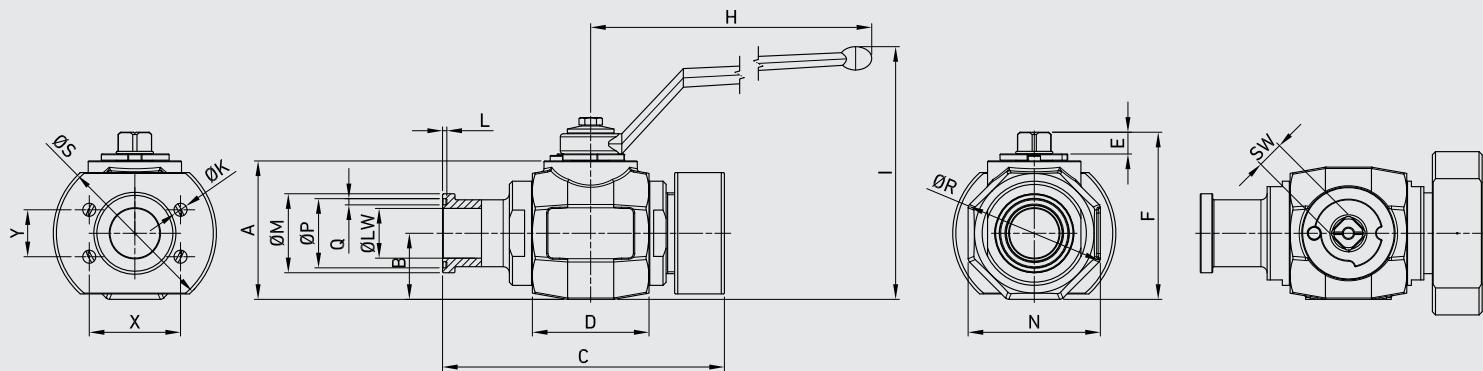

## GBFS3

**CS** Carbon Steel    **SS** Stainless Steel

TYPE	DN	PN	A	B	C	D	E	F	H	I	L	ØK	ØM	N	ØP	Q	ØR	ØS	X	Y	SW	ØLW	WEIGHT	ITEM CODE
GBFS3	32	MPa 27,5 Psi 3000	mm 89 inch 3,50	42,5 1,67	181,2 7,14	75 2,95	14 0,55	107,5 4,23	310 12,20	162,5 6,40	2,79 0,11	M10	50,8 2,00	85 3,35	44,45 1,75	3,94 0,16	91,5 3,60	105 4,13	58,7 2,31	30,2 1,19	17 0,67	32 1,26	kg 5,955 lb 13,13	GB2SFC3L021A000 GB2SFC3L044A000
GBFS3	40	MPa 20,6 Psi 3000	mm 106 inch 4,17	52,5 2,07	203,5 8,01	85 3,35	14 0,55	124,5 4,90	310 12,20	180 7,09	2,79 0,11	M12	60,33 2,38	105 4,13	53,72 2,11	3,94 0,16	112,8 4,44	120 4,72	69,8 2,75	35,7 1,41	17 0,67	38 1,50	kg 9,118 lb 20,10	GB2SFC4L021A000 GB2SFC4L044A000
GBFS3	50	MPa 20,6 Psi 3000	mm 115,5 inch 4,55	58,5 2,30	214 8,43	97,85 3,85	14 0,55	134 5,28	310 12,20	190 7,48	2,79 0,11	M12	71,42 2,81	117 4,61	63,25 2,49	3,94 0,16	125,8 4,95	145 5,71	77,8 3,06	42,9 1,69	17 0,67	48 1,89	kg 12,032 lb 26,53	GB2SFC5L021A000 GB2SFC5L044A000

## GBFS3 U

**CS** Carbon Steel    **SS** Stainless Steel

TYPE	DN	PN	A	B	C	D	E	F	H	I	L	ØK	ØM	N	ØP	Q	ØR	ØS	X	Y	SW	ØLW	WEIGHT	ITEM CODE
GBFS3	32	MPa 27,5 Psi 3000	mm 89 inch 3,50	42,5 1,67	181,2 7,14	75 2,95	14 0,55	107,5 4,23	310 12,20	162,5 6,40	2,79 0,11	7/16-14	50,8 UNC	85 2,00	44,45 3,35	3,94 1,75	91,5 0,16	105 3,60	58,7 4,13	30,2 2,31	17 1,19	32 0,67	kg 5,955 lb 13,13	GB2SOC3L021A000 GB2SOC3L044A000
GBFS3	40	MPa 20,6 Psi 3000	mm 106 inch 4,17	52,5 2,07	203,5 8,01	85 3,35	14 0,55	124,5 4,90	310 12,20	180 7,09	2,79 0,11	1/2-13	60,33 UNC	105 2,38	53,72 4,13	3,94 2,11	112,8 0,16	120 4,44	69,8 4,72	35,7 2,75	17 1,41	38 0,67	kg 9,118 lb 20,10	GB2SOC4L021A000 GB2SOC4L044A000
GBFS3	50	MPa 20,6 Psi 3000	mm 115,5 inch 4,55	58,5 2,30	214 8,43	97,85 3,85	14 0,55	134 5,28	310 12,20	190 7,48	2,79 0,11	1/2-13	71,42 UNC	117 2,81	63,25 4,61	3,94 2,49	125,8 0,16	145 4,95	77,8 5,71	42,9 3,06	17 1,69	48 0,67	kg 12,03 lb 26,53	GB2SOC5L021A000 GB2SOC5L044A000

## | GBFS6

TYPE	DN	PN	A	B	C	D	E	F	H	I	L	ØK	ØM	N	ØP	Q	ØR	ØS	X	Y	SW	ØLW	WEIGHT	ITEM CODE										
			mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	kg	lb										
GBFS6	32	MPa 41,3	89	3,50	42,5	1,67	197,5	7,78	75	0,55	14	4,23	310	12,20	162,5	2,79	M12	54	2,13	85	3,35	44,45	1,75	3,94	91,5	105	66,7	31,8	17	32	kg 6,145	lb 13,55	GB2SFC93021A000	GB2SFC93044A000
		Psi 6000																																
GBFS6	40	MPa 41,3	106	4,17	52,5	2,07	228,5	9,00	85	0,55	14	124,5	310	10,08	180	2,79	M16	63,5	2,50	105	4,13	53,72	2,11	3,94	112,8	120	79,4	36,5	17	38	kg 9,085	lb 20,03	GB2SFCA3021A000	GB2SFCA3044A000
		Psi 6000																																
GBFS6	50	MPa 41,3	115,5	4,55	58,5	2,30	256	10,08	97,85	0,55	14	134	310	12,20	190	2,79	M20	79,4	3,13	117	4,61	63,25	2,49	3,94	125,8	145	96,8	44,5	17	48	kg 12,858	lb 28,35	GB2SFCB3021A000	GB2SFCB3044A000
		Psi 6000																																

## | GBFS6 U

TYPE	DN	PN	A	B	C	D	E	F	H	I	L	ØK	ØM	N	ØP	Q	ØR	ØS	X	Y	SW	ØLW	WEIGHT	ITEM CODE										
			mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	kg	lb										
GBFS6	32	MPa 41,3	89	3,50	42,5	1,67	197,5	7,78	75	0,55	14	4,23	310	12,20	162,5	2,79	1/2-13	54	2,13	85	3,35	1,75	3,94	91,5	105	66,7	31,8	17	32	kg 6,145	lb 13,55	GB2SOC93021A000	GB2SOC93044A000	
		Psi 6000																																
GBFS6	40	MPa 41,3	106	4,17	52,5	2,07	228,5	9,00	85	0,55	14	124,5	310	10,08	180	2,79	5/8-11	63,5	2,50	105	4,13	53,72	2,11	3,94	112,8	120	79,4	36,5	17	38	kg 9,085	lb 20,03	GB2SOCA3021A000	GB2SOCA3044A000
		Psi 6000																																
GBFS6	50	MPa 41,3	115,5	4,55	58,5	2,30	256	10,08	97,85	0,55	14	134	310	12,20	190	2,79	3/4-10	79,4	3,13	117	4,61	63,25	2,49	3,94	125,8	145	96,8	44,5	17	48	kg 12,885	lb 28,41	GB2S0CB3021A000	GB2S0CB3044A000
		Psi 6000																																



# ■ GV2


## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0

### CS Carbon Steel

- Type: ball valve 2 way
- Sizes: from DN6 up to DN32
- Ends: BSP-NPT-SAE / ISO6162-1
- Pressure: up to PN500 / S6000
- Temp range: from -20°C to +100°C

### ■ STANDARD COMPOSITION OF VALVE

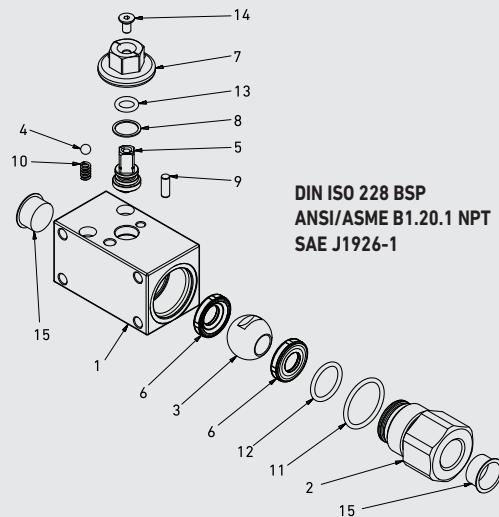

POS	DESCRIPTION	Q.TY	CS Carbon Steel	MATERIAL
1	Body	1		1,0737
2	Adapter	1		1,0737
3	Ball	1		1,0737
4	Spring UNL17223-1	1		1,0116
5	Stem	1		1,0737
6	Ball seat	2		POM
7	Washer	1		1,0737
8	Stem ring	1		POM
9	Pin	1		1,0737
10	Spring ball	1		1,0116
11	Adapter o-ring	2		FKM
12	Adapter o-ring	2		FKM
13	Stem o-ring	1		FKM
14	Screw	1		DIN 7991 8.8
15	Caps	2		PVC



## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GV2 2-way

Ends \_\_\_\_\_

GAS DIN/ NPT ANSI SAE IS06162

ISO 228 /ASME J1926-1

BSP B1.20.1

G 1/4 N 1/4 SAE4 S6000

G 3/8 N 3/8 SAE6

G 1/2 N 1/2 SAE8

G 3/4 N 3/4 SAE12

G 1 N 1 SAE16

G 1 1/4 R N 1 1/4 R SAE20R

G 1 1/4 N 1 1/4 SAE20

Size \_\_\_\_\_

from DN6 to DN25

Body Material \_\_\_\_\_

● 1 = 1,0737

Adapter material \_\_\_\_\_

● 1 = 1,0737

Stem material \_\_\_\_\_

● 1 = 1,0737

Ball Material \_\_\_\_\_

● 1 = 1,0737

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*




Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN50 Mpa
- Pressure class up to PN6000 Psi
- Locking device

For further special requests please consult our technical/commercial service.

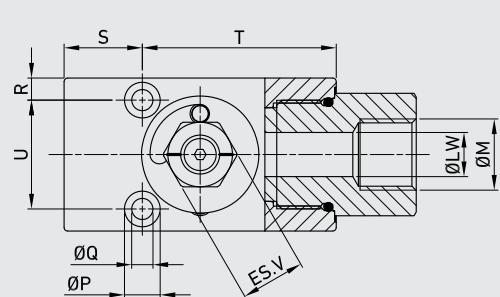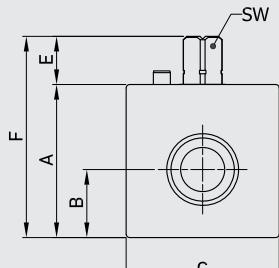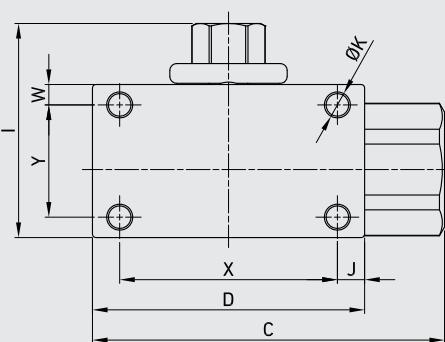

## ■ GV2 DIN/ISO 228 BSP

**CS**  
Carbon Steel

TYPE	DN	PN	A	B	C	D	E	ES.V	F	G	I	J	ØK	ØM	ØP	ØQ	R	S	T	U	W	X	Y	SW	ØLW	WEIGHT	ITEM CODE
GV2 G 1/4	6	MPa 50	mm 40	17,4	85,5	67	14,5	19	54,5	37	57,5	5,5	M6	G	10,5	6,25	6,5	14,5	52,5	24	3,5	56	33	9	6	kg 0,932	GV2GGT15011B000
		Psi 7250	inch 1,57	0,69	3,37	2,64	0,57	0,75	2,15	1,46	2,26	0,22		1/4	0,41	0,25	0,26	0,57	2,07	0,94	0,14	2,20	1,30	0,35	0,24	lb 2,05	
GV2 G 3/8	10	MPa 50	mm 40	19,5	88,5	70	14,5	19	54,5	37	57,5	7	M6	G	10,5	6,25	6,5	16	54	24	3,5	56	33	9	10	kg 0,919	GV2GGT25011B000
		Psi 7250	inch 1,57	0,77	3,48	2,76	0,57	0,75	2,15	1,46	2,26	0,28		3/8	0,41	0,25	0,26	0,63	2,13	0,94	0,14	2,20	1,30	0,35	0,39	lb 2,03	
GV2 G 1/2	13	MPa 50	mm 45	20	103,5	80	14,5	19	69,5	45	62,5	8	M8	G	10,5	6,25	6,5	23	57	32	6	64	33	9	13	kg 1,307	GV2GGT35011B000
		Psi 7250	inch 1,77	0,79	4,07	3,15	0,57	0,75	2,74	1,77	2,46	0,31		1/2	0,41	0,25	0,26	0,91	2,24	1,26	0,24	2,52	1,30	0,35	0,51	lb 2,88	
GV2 G 3/4	20	MPa 50	mm 55	23,4	129,5	101	18,5	24	73,5	55	77,5	10,5	M8	G	13,5	8,25	7,5	25,5	75,5	40	6	80	43	14	20	kg 2,424	GV2GGT45011B000
		Psi 7250	inch 2,17	0,92	5,10	3,98	0,73	0,94	2,89	2,17	3,05	0,41		3/4	0,53	0,32	0,30	1,00	2,97	1,57	0,24	3,15	1,69	0,55	0,79	lb 5,34	
GV2 G 1	25	MPa 50	mm 65	29,5	133,5	105	18,5	24	83,5	65	87,5	7,5	M8	G 1	13,5	8,25	8,5	27,5	77,5	48	6	90	53	14	25	kg 3,446	GV2GGT55011B000
		Psi 7250	inch 2,56	1,16	5,26	4,13	0,73	0,94	3,29	2,56	3,44	0,30		1/4	0,53	0,32	0,33	1,08	3,05	1,89	0,24	3,54	2,09	0,55	0,98	lb 7,60	
GV2 G 1 1/4 R	25	MPa 50	mm 65	29,5	133,5	105	18,5	24	83,5	65	87,5	7,5	M8	G 1	13,5	8,25	8,5	27,5	77,5	48	6	90	53	14	25	kg 3,265	GV2GGR65011B000
		Psi 7250	inch 2,56	1,16	5,26	4,13	0,73	0,94	3,29	2,56	3,44	0,30		1/4	0,53	0,32	0,33	1,08	3,05	1,89	0,24	3,54	2,09	0,55	0,98	lb 7,20	
GV2 G 1 1/4	32	MPa 50	mm 80	33,5	133,5	105	18,5	32	98,5	80	103,5	9,5	M8	G 1	13,5	8,25	10	24,5	80,5	60	8	86	64	17	32	kg 4,991	GV2GGT65011B000
		Psi 7250	inch 3,15	1,32	5,26	4,13	0,73	1,26	3,88	3,15	4,07	0,37		1/4	0,53	0,32	0,39	0,96	3,17	2,36	0,31	3,39	2,52	0,67	1,26	lb 11,00	

**■ GV2 ANSI/ASME B1.20.1 NPT**

**CS**  
Carbon Steel

TYPE	DN	PN	A	B	C	D	E	ES.V	F	G	I	J	ØK	ØM	ØP	ØQ	R	S	T	U	W	X	Y	SW	ØLW	WEIGHT	ITEM CODE
GV2 N 1/4	6	MPa 50	mm 40	17,4	85,5	67	14,5	19	54,5	37	57,5	5,5	M6	N 1/4	10,5	6,25	6,5	14,5	52,5	24	3,5	56	33	9	6	kg 0,932	GV2NNT15011B000
		Psi 7250	inch 1,57	0,69	3,37	2,64	0,57	0,75	2,15	1,46	2,26	0,22		0,41	0,25	0,26	0,57	2,07	0,94	0,14	2,20	1,30	0,35	0,24	lb 2,05		
GV2 N 3/8	10	MPa 50	mm 40	19,5	88,5	70	14,5	19	54,5	37	57,5	7	M6	N 3/8	10,5	6,25	6,5	16	54	24	3,5	56	33	9	10	kg 0,919	GV2NNT25011B000
		Psi 7250	inch 1,57	0,77	3,48	2,76	0,57	0,75	2,15	1,46	2,26	0,28		0,41	0,25	0,26	0,63	2,13	0,94	0,14	2,20	1,30	0,35	0,39	lb 2,03		
GV2 N 1/2	13	MPa 50	mm 45	20	103,5	80	14,5	19	69,5	45	62,5	8	M8	N 1/2	10,5	6,25	6,5	23	57	32	6	64	33	9	13	kg 1,307	GV2NNT35011B000
		Psi 7250	inch 1,77	0,79	4,07	3,15	0,57	0,75	2,74	1,77	2,46	0,31		0,41	0,25	0,26	0,91	2,24	1,26	0,24	2,52	1,30	0,35	0,51	lb 2,88		
GV2 N 3/4	20	MPa 50	mm 55	23,4	129,5	101	18,5	24	73,5	55	77,5	10,5	M8	N 3/4	13,5	8,25	7,5	25,5	75,5	40	6	80	43	14	20	kg 2,424	GV2NNT45011B000
		Psi 7250	inch 2,17	0,92	5,10	3,98	0,73	0,94	2,89	2,17	3,05	0,41		0,53	0,32	0,30	1,00	2,97	1,57	0,24	3,15	1,69	0,55	0,79	lb 5,34		
GV2 N 1	25	MPa 50	mm 65	29,5	133,5	105	18,5	24	83,5	65	87,5	7,5	M8	N 1	13,5	8,25	8,5	27,5	77,5	48	6	90	53	14	25	kg 3,446	GV2NNT55011B000
		Psi 7250	inch 2,56	1,16	5,26	4,13	0,73	0,94	3,29	2,56	3,44	0,30		0,53	0,32	0,33	1,08	3,05	1,89	0,24	3,54	2,09	0,55	0,98	lb 7,60		
GV2 N 11/4 R	25	MPa 50	mm 65	29,5	133,5	105	18,5	24	83,5	65	87,5	7,5	M8	N 1/4 R	13,5	8,25	8,5	27,5	77,5	48	6	90	53	14	25	kg 3,265	GV2NNR65011B000
		Psi 7250	inch 2,56	1,16	5,26	4,13	0,73	0,94	3,29	2,56	3,44	0,30		0,53	0,32	0,33	1,08	3,05	1,89	0,24	3,54	2,09	0,55	0,98	lb 7,20		
GV2 N 11/4	32	MPa 50	mm 80	33,5	133,5	105	18,5	32	98,5	80	103,5	9,5	M8	N 1	13,5	8,25	10	24,5	80,5	60	8	86	64	17	32	kg 4,991	GV2NNT65011B000
		Psi 7250	inch 3,15	1,32	5,26	4,13	0,73	1,26	3,88	3,15	4,07	0,37		0,53	0,32	0,39	0,96	3,17	2,36	0,31	3,39	2,52	0,67	1,26	lb 11,00		

**■ GV2 SAE J1926-1**

**CS**  
Carbon Steel

TYPE	DN	PN	A	B	C	D	E	ES.V	F	G	I	J	ØK	ØM	ØP	ØQ	R	S	T	U	W	X	Y	SW	ØLW	WEIGHT	ITEM CODE
GV2 SAE4	6	MPa 50	mm 40	17,4	85,5	67	14,5	19	54,5	37	57,5	5,5	M6	SAE 4	10,5	6,25	6,5	14,5	52,5	24	3,5	56	33	9	6	kg 0,932	GV2EEE05011B000
		Psi 7250	inch 1,57	0,69	3,37	2,64	0,57	0,75	2,15	1,46	2,26	0,22		0,41	0,25	0,26	0,57	2,07	0,94	0,14	2,20	1,30	0,35	0,24	lb 2,05		
GV2 SAE6	10	MPa 50	mm 40	19,5	88,5	70	14,5	19	54,5	37	57,5	7	M6	SAE 6	10,5	6,25	6,5	16	54	24	3,5	56	33	9	10	kg 0,919	GV2EEE15011B000
		Psi 7250	inch 1,57	0,77	3,48	2,76	0,57	0,75	2,15	1,46	2,26	0,28		0,41	0,25	0,26	0,63	2,13	0,94	0,14	2,20	1,30	0,35	0,39	lb 2,03		
GV2 SAE8	13	MPa 50	mm 45	20	103,5	80	14,5	19	69,5	45	62,5	8	M8	SAE 8	10,5	6,25	6,5	23	57	32	6	64	33	9	13	kg 1,307	GV2EEE25011B000
		Psi 7250	inch 1,77	0,79	4,07	3,15	0,57	0,75	2,74	1,77	2,46	0,31		0,41	0,25	0,26	0,91	2,24	1,26	0,24	2,52	1,30	0,35	0,51	lb 2,88		
GV2 SAE12	20	MPa 50	mm 55	23,4	129,5	101	18,5	24	73,5	55	77,5	10,5	M8	SAE 12	13,5	8,25	7,5	25,5	75,5	40	6	80	43	14	20	kg 2,424	GV2EEE35011B000
		Psi 7250	inch 2,17	0,92	5,10	3,98	0,73	0,94	2,89	2,17	3,05	0,41		0,53	0,32	0,30	1,00	2,97	1,57	0,24	3,15	1,69	0,55	0,79	lb 5,34		
GV2 SAE16	25	MPa 50	mm 65	29,5	133,5	105	18,5	24	83,5	65	87,5	7,5	M8	SAE 16	13,5	8,25	8,5	27,5	77,5	48	6	90	53	14	25	kg 3,446	GV2EEE45011B000
		Psi 7250	inch 2,56	1,16	5,26	4,13	0,73	0,94	3,29	2,56	3,44	0,30		0,53	0,32	0,33	1,08	3,05	1,89	0,24	3,54	2,09	0,55	0,98	lb 7,60		
GV2 SAE20R	25	MPa 50	mm 65	29,5	133,5	105	18,5	24	83,5	65	87,5	7,5	M8	SAE 20R	13,5	8,25	8,5	27,5	77,5	48	6	90	53	14	25	kg 3,265	GV2EEE85011B000
		Psi 7250	inch 2,56	1,16	5,26	4,13	0,73	0,94	3,29	2,56	3,44	0,30		0,53	0,32	0,33	1,08	3,05	1,89	0,24	3,54	2,09	0,55	0,98	lb 7,20		
GV2 SAE20	32	MPa 50	mm 80	33,5	133,5	105	18,5	32	98,5	80	103,5	9,5	M8	SAE 20	13,5	8,25	10	24,5	80,5	60	8	86	64	17	32	kg 4,991	GV2EEE55011B000
		Psi 7250	inch 3,15	1,32	5,26	4,13	0,73	1,26	3,88	3,15	4,07	0,37		0,53	0,32	0,39	0,96	3,17	2,36	0,31	3,39	2,52	0,67	1,26	lb 11,00		



# ■ GV3


## 3-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0

### Carbon Steel

- Type: ball valve 3 way
- Sizes: from DN6 up to DN32
- Ends: BSP-NPT-SAE / ISO6162-1
- Pressure: up to PN500 / S6000
- Temp range: from -20°C to +100°C


### ■ STANDARD COMPOSITION OF VALVE

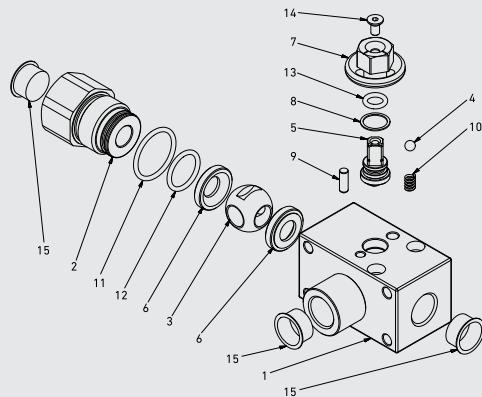

DIN ISO 228 BSP  
ANSI/ASME B1.20.1 NPT  
SAE J1926-1



**WARNING!**  
Pressure inlet only  
from center port 1



		POS	DESCRIPTION	Q.TY	CS Carbon Steel	MATERIAL
1			Body	1		1,0737
2			Adapter	1		1,0737
3			Ball	1		1,0737
4			Spring	1		1,0116
5			Stem	1		1,0737
6			Ball seat	2		POM
7			Washer	1		1,0737
8			Stem ring	1		POM
9			Pin	1		1,0737
10			Spring ball	1		1,0116
11			Adapter o-ring	2		FKM
12			Adapter o-ring	2		FKM
13			Stem o-ring	1		FKM
14			Screw	1		DIN 7991 8.8
15			Caps	3		PVC



## CODE DESCRIPTION STRUCTURE

**GV3 G 1/2 DN13 1 1 1 1 A B**

Type and way of valve

GV3 3-way

Ends

GAS DIN/ NPT ANSI SAE IS06162

ISO 228 /ASME J1926-1

BSP B1.20.1

G 1/4 N 1/4 SAE4 S6000

G 3/8 N 3/8 SAE6

G 1/2 N 1/2 SAE8

G 3/4 N 3/4 SAE12

G 1 N 1 SAE16

G 1 1/4 R N 1 1/4 SAE20R

G 1 1/4 N 1 1/4 SAE20

Size

from DN6 to DN32

Body Material

● 1 = 1,0737

Adapter material

● 1 = 1,0737

Stem material

● 1 = 1,0737

Ball Material

● 1 = 1,0737

Seat material

A = POM D = PEEK\* K = GEMPTFE\* C = PTFE\*




Seal material

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN50 Mpa
- Pressure class up to PN6000 Psi
- Locking device

For further special requests please consult our technical/commercial service.

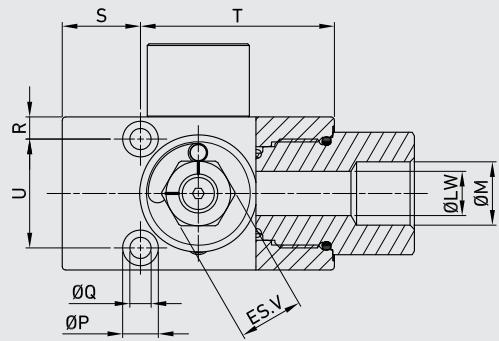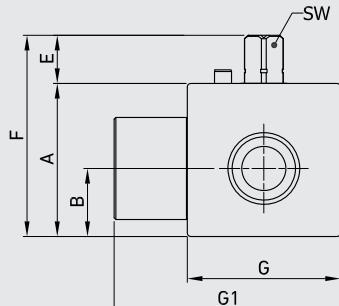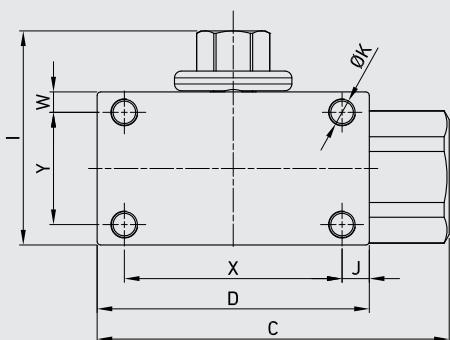

## ■ GV3 DIN/ISO 228 BSP

**CS**  
Carbon Steel

TYPE	DN	PN	A	B	C	D	E	ES.V	F	G	G1	I	J	ØK	ØM	ØP	ØQ	R	S	T	U	W	X	Y	SW	ØLW	WEIGHT	ITEM CODE
GV3 G 1/4	6	MPa 50 Psi 7250	mm 40	17,4	85,5	67	14,5	19	54,5	37	60,5	57,5	5,5	M6	G 10,5	6,25	6,5	14,5	52,5	24	3,5	56	33	9	6	kg 1,08	lb 2,38	GV3GGT14011B000
GV3 G 3/8	10	MPa 50 Psi 7250	mm 40	19,5	88,5	70	14,5	19	54,5	37	61	57,5	7	M6	G 10,5	6,25	6,5	16	54	24	3,5	56	33	9	10	kg 1,15	lb 2,54	GV3GGT24011B000
GV3 G 1/2	13	MPa 50 Psi 7250	mm 45	20	103,5	80	14,5	19	69,5	45	66,5	62,5	8	M8	G 10,5	6,25	6,5	23	57	32	6	64	33	9	13	kg 1,362	lb 3,00	GV3GGT33011B000
GV3 G 3/4	20	MPa 50 Psi 7250	mm 55	23,4	129,5	101	18,5	24	73,5	55	85	77,5	10,5	M8	G 13,5	8,25	7,5	25,5	75,5	40	6	80	43	14	20	kg 2,51	lb 5,53	GV3GGT43011B000
GV3 G 1	25	MPa 50 Psi 7250	mm 65	29,5	133,5	105	18,5	24	83,5	65	97,5	87,5	7,5	M8	G 1 13,5	8,25	8,5	27,5	77,5	48	6	90	53	14	25	kg 3,564	lb 7,86	GV3GGT53011B000
GV3 G 1 1/4 R	25	MPa 50 Psi 7250	mm 65	29,5	133,5	105	18,5	24	83,5	65	99	87,5	7,5	M8	G 1 13,5	8,25	8,5	27,5	77,5	48	6	90	53	14	25	kg 3,485	lb 7,68	GV3GGR63011B000
GV3 G 1 1/4	32	MPa 50 Psi 7250	mm 80	33,5	133,5	105	18,5	32	98,5	80	118	103,5	9,5	M8	G 1 13,5	8,25	10	24,5	80,5	60	8	86	64	17	32	kg 5,32	lb 11,73	GV3GGT63011B000

## ■ GV3 ANSI/ASME B1.20.1 NPT

**CS**  
Carbon Steel

TYPE	DN	PN	A	B	C	D	E	ES.V	F	G	G1	I	J	ØK	ØM	ØP	ØQ	R	S	T	U	W	X	Y	SW	ØLW	WEIGHT	ITEM CODE
GV3 N 1/4	6	MPa 50	mm 40	17,4	85,5	67	14,5	19	54,5	37	60,5	57,5	5,5	M6	N 1/4	10,5	6,25	6,5	14,5	52,5	24	3,5	56	33	9	6	kg 1,08	GV3NNT14011B000
		Psi 7250	inch 1,57	0,69	3,37	2,64	0,57	0,75	2,15	1,46	2,38	2,26	0,22		0,41	0,25	0,26	0,57	2,07	0,94	0,14	2,20	1,30	0,35	0,24	lb 2,38		
GV3 N 3/8	10	MPa 50	mm 40	19,5	88,5	70	14,5	19	54,5	37	61	57,5	7	M6	N 3/8	10,5	6,25	6,5	16	54	24	3,5	56	33	9	10	kg 1,15	GV3NNT24011B000
		Psi 7250	inch 1,57	0,77	3,48	2,76	0,57	0,75	2,15	1,46	2,40	2,26	0,28		0,41	0,25	0,26	0,63	2,13	0,94	0,14	2,20	1,30	0,35	0,39	lb 2,54		
GV3 N 1/2	13	MPa 50	mm 45	20	103,5	80	14,5	19	69,5	45	66,5	62,5	8	M8	N 1/2	10,5	6,25	6,5	23	57	32	6	64	33	9	13	kg 1,362	GV3NNT33011B000
		Psi 7250	inch 1,77	0,79	4,07	3,15	0,57	0,75	2,74	1,77	2,62	2,46	0,31		0,41	0,25	0,26	0,91	2,24	1,26	0,24	2,52	1,30	0,35	0,51	lb 3,00		
GV3 N 3/4	20	MPa 50	mm 55	23,4	129,5	101	18,5	24	73,5	55	85	77,5	10,5	M8	N 3/4	13,5	8,25	7,5	25,5	75,5	40	6	80	43	14	20	kg 2,51	GV3NNT43011B000
		Psi 7250	inch 2,17	0,92	5,10	3,98	0,73	0,94	2,89	2,17	3,35	3,05	0,41		0,53	0,32	0,30	1,00	2,97	1,57	0,24	3,15	1,69	0,55	0,79	lb 5,53		
GV3 N 1	25	MPa 50	mm 65	29,5	133,5	105	18,5	24	83,5	65	97,5	87,5	7,5	M8	N 1	13,5	8,25	8,5	27,5	77,5	48	6	90	53	14	25	kg 3,564	GV3NNT53011B000
		Psi 7250	inch 2,56	1,16	5,26	4,13	0,73	0,94	3,29	2,56	3,84	3,44	0,30		0,53	0,32	0,33	1,08	3,05	1,89	0,24	3,54	2,09	0,55	0,98	lb 7,86		
GV3 N 11/4R	25	MPa 50	mm 65	29,5	133,5	105	18,5	24	83,5	65	99	87,5	7,5	M8	N 1/4 R	13,5	8,25	8,5	27,5	77,5	48	6	90	53	14	25	kg 3,485	GV3NNR63011B000
		Psi 7250	inch 2,56	1,16	5,26	4,13	0,73	0,94	3,29	2,56	3,90	3,44	0,30		0,53	0,32	0,33	1,08	3,05	1,89	0,24	3,54	2,09	0,55	0,98	lb 7,68		
GV3 N 11/4	32	MPa 50	mm 80	33,5	133,5	105	18,5	32	98,5	80	118	103,5	9,5	M8	N 1	13,5	8,25	10	24,5	80,5	60	8	86	64	17	32	kg 5,32	GV3NNT63011B000
		Psi 7250	inch 3,15	1,32	5,26	4,13	0,73	1,26	3,88	3,15	4,65	4,07	0,37		0,53	0,32	0,39	0,96	3,17	2,36	0,31	3,39	2,52	0,67	1,26	lb 11,73		

## ■ GV3 SAE J1926-1

**CS**  
Carbon Steel

TYPE	DN	PN	A	B	C	D	E	ES.V	F	G	G1	I	J	ØK	ØM	ØP	ØQ	R	S	T	U	W	X	Y	SW	ØLW	WEIGHT	ITEM CODE
GV3 SAE4	6	MPa 50	mm 40	17,4	85,5	67	14,5	19	54,5	37	60,5	57,5	5,5	M6	SAE 4	10,5	6,25	6,5	14,5	52,5	24	3,5	56	33	9	6	kg 1,08	GV3EEE04011B000
		Psi 7250	inch 1,57	0,69	3,37	2,64	0,57	0,75	2,15	1,46	2,38	2,26	0,22		0,41	0,25	0,26	0,57	2,07	0,94	0,14	2,20	1,30	0,35	0,24	lb 2,38		
GV3 SAE6	10	MPa 50	mm 40	19,5	88,5	70	14,5	19	54,5	37	61	57,5	7	M6	SAE 6	10,5	6,25	6,5	16	54	24	3,5	56	33	9	10	kg 1,15	GV3EEE14011B000
		Psi 7250	inch 1,57	0,77	3,48	2,76	0,57	0,75	2,15	1,46	2,40	2,26	0,28		0,41	0,25	0,26	0,63	2,13	0,94	0,14	2,20	1,30	0,35	0,39	lb 2,54		
GV3 SAE8	13	MPa 50	mm 45	20	103,5	80	14,5	19	69,5	45	66,5	62,5	8	M8	SAE 8	10,5	6,25	6,5	23	57	32	6	64	33	9	13	kg 1,362	GV3EEE23011B000
		Psi 7250	inch 1,77	0,79	4,07	3,15	0,57	0,75	2,74	1,77	2,62	2,46	0,31		0,41	0,25	0,26	0,91	2,24	1,26	0,24	2,52	1,30	0,35	0,51	lb 3,00		
GV3 SAE12	20	MPa 50	mm 55	23,4	129,5	101	18,5	24	73,5	55	85	77,5	10,5	M8	SAE 12	13,5	8,25	7,5	25,5	75,5	40	6	80	43	14	20	kg 2,51	GV3EEE33011B000
		Psi 7250	inch 2,17	0,92	5,10	3,98	0,73	0,94	2,89	2,17	3,35	3,05	0,41		0,53	0,32	0,30	1,00	2,97	1,57	0,24	3,15	1,69	0,55	0,79	lb 5,53		
GV3 SAE16	25	MPa 50	mm 65	29,5	133,5	105	18,5	24	83,5	65	97,5	87,5	7,5	M8	SAE 16	13,5	8,25	8,5	27,5	77,5	48	6	90	53	14	25	kg 3,564	GV3EEE43011B000
		Psi 7250	inch 2,56	1,16	5,26	4,13	0,73	0,94	3,29	2,56	3,84	3,44	0,30		0,53	0,32	0,33	1,08	3,05	1,89	0,24	3,54	2,09	0,55	0,98	lb 7,86		
GV3 SAE20R	25	MPa 50	mm 65	29,5	133,5	105	18,5	24	83,5	65	99	87,5	7,5	M8	SAE 20R	13,5	8,25	8,5	27,5	77,5	48	6	90	53	14	25	kg 3,485	GV3EEE83011B000
		Psi 7250	inch 2,56	1,16	5,26	4,13	0,73	0,94	3,29	2,56	3,90	3,44	0,30		0,53	0,32	0,33	1,08	3,05	1,89	0,24	3,54	2,09	0,55	0,98	lb 7,68		
GV3 SAE20	32	MPa 50	mm 80	33,5	133,5	105	18,5	32	98,5	80	118	103,5	9,5	M8	SAE 20	13,5	8,25	10	24,5	80,5	60	8	86	64	17	32	kg 5,32	GV3EEE53011B000
		Psi 7250	inch 3,15	1,32	5,26	4,13	0,73	1,26	3,88	3,15	4,65	4,07	0,37		0,53	0,32	0,39	0,96	3,17	2,36	0,31	3,39	2,52	0,67	1,26	lb 11,73		



# G3K


## 3-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0


### CS Carbon Steel

- Type: ball valve 3 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### STANDARD COMPOSITION OF VALVE

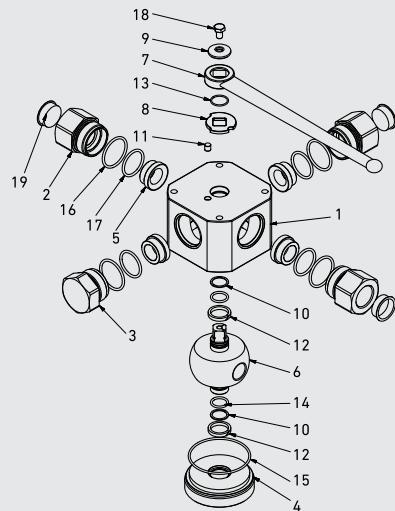

CS Carbon Steel			CS Carbon Steel				
POS	DESCRIPTION	Q.TY	MATERIAL	POS	DESCRIPTION	Q.TY	MATERIAL
1	Body	1	1,0737	11	Pin	1	1,0737
2	Adapter	3	1,0737	12	Body ring	2	PTFE
3	Close adapter	1	1,0737	13	Seeger	1	1,4301
4	Stemball adapter	1	1,0737	14	Stemball o-ring	2	NBR
5	Ball seat	4	POM	15	Body o-ring	1	NBR
6	Ball stem	1	1,0737	16	Adapter o-ring	4	NBR
7	Handle	1	ZINC	17	Seal o-ring	4	NBR
8	Washer	1	1,0116	18	Screw	1	DIN 6921 8.8
9	Washer	1	1,0116	19	Caps	4	PVC
10	Stemball ring	2	PTFE				

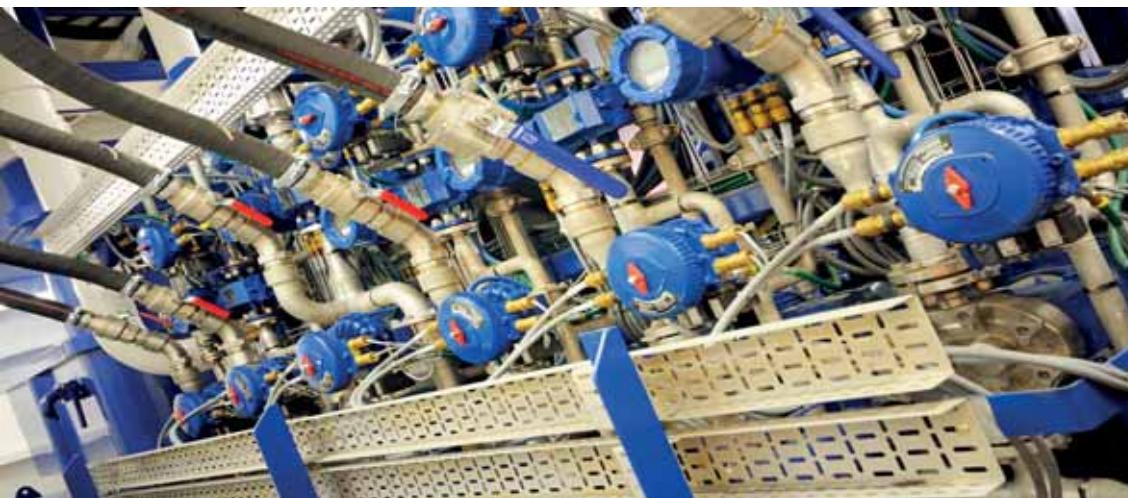

## CODE DESCRIPTION STRUCTURE

<b>G3K</b>	<b>K01</b>	<b>G1/4</b>	<b>DN6</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>A</b>	<b>B</b>
------------	------------	-------------	------------	----------	----------	----------	----------	----------	----------

Type and way of valve \_\_\_\_\_

G3K 3-way

Type of way \_\_\_\_\_

L K01  
T K02  
X K14

Ends \_\_\_\_\_

GAS DIN/ NPT ANSI  
ISO 228 /ASME  
BSP B1.20.1  
G 1/4 N 1/4  
G 3/8 N 3/8  
G 1/2 N 1/2  
G 3/4 N 3/4  
G 1 N 1  
G 1 1/4 R N 1 1/4 R  
G 1 1/2 R N 1 1/2 R

Size \_\_\_\_\_

from DN6 to DN25

Body Material \_\_\_\_\_

● 1 = 1,0737

Adapter material \_\_\_\_\_

● 1 = 1,0737

Stem material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Ball Material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Seat material \_\_\_\_\_

A = POM


Seal material \_\_\_\_\_

B = NBR

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN35 MPa
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.



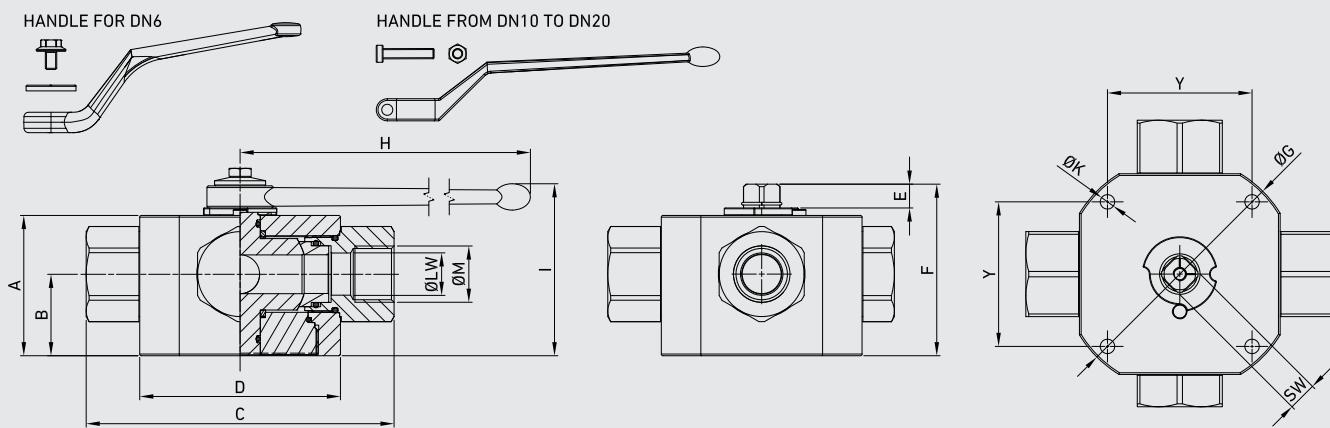


## G3K DIN ISO 228 BSP

TYPE	DN	PN	A	B	C	D	E	F	ØG	H	I	ØK	ØM	Y	SW	ØLW	WEIGHT
G3K G 1/4	6	MPa 50	mm 42	21,5	100	70	11	56,5	-	110	97,5	6,5	G 1/4	55	9	6	kg 1,767
		Psi 7250	inch 1,65	0,85	3,94	2,76	0,43	2,22	-	4,33	3,84	0,26		2,17	0,35	0,24	lb 3,90
G3K G 3/8	10	MPa 50	mm 53	28,5	115	80	14	71,5	-	180	101	6,5	G 3/8	65	14	10	kg 3,018
		Psi 7250	inch 2,09	1,12	4,53	3,15	0,55	2,81	-	7,09	3,98	0,26		2,56	0,55	0,39	lb 6,65
G3K G 1/2	13	MPa 50	mm 62	33	136	100	14	80,5	-	180	110	8,5	G 1/2	80	14	13	kg 5,247
		Psi 7250	inch 2,44	1,30	5,35	3,94	0,55	3,17	-	7,09	4,33	0,33		3,15	0,55	0,51	lb 11,57
G3K G 3/4	20	MPa 50	mm 68	36	156	113	14	86,5	-	300	116,5	8,5	G 3/4	85	14	20	kg 6,898
		Psi 7250	inch 2,68	1,42	6,14	4,45	0,55	3,41	-	11,81	4,59	0,33		3,35	0,55	0,79	lb 15,21
G3K G 1	25	MPa 50	mm 82	47,5	181	118	14	100,5	138	300	130,5	8,5	G 1	85	14	25	kg 9,005
		Psi 7250	inch 3,23	1,87	7,13	4,65	0,55	3,96	5,43	11,81	5,14	0,33		3,35	0,55	0,98	lb 19,85
G3K G 1 1/4 R	25	MPa 50	mm 82	47,5	181	118	14	100,5	138	300	130,5	8,5	G 1 1/4	85	14	25	kg 8,989
		Psi 7250	inch 3,23	1,87	7,13	4,65	0,55	3,96	5,43	11,81	5,14	0,33		3,35	0,55	0,98	lb 19,82
G3K G 1 1/2 R	32	MPa 50	mm 82	47,5	181	118	14	100,5	138	300	130,5	8,5	G 1 1/2	85	14	25	kg 9,213
		Psi 7250	inch 3,23	1,87	7,13	4,65	0,55	3,96	5,43	11,81	5,14	0,33		3,35	0,55	0,98	lb 20,31

## G3K ANSI/ASME B1.20.1 NPT

TYPE	DN	PN	A	B	C	D	E	F	ØG	H	I	ØK	ØM	Y	SW	ØLW	WEIGHT
G3K N 1/4	6	MPa 50	mm 42	21,5	100	70	11	56,5	-	110	97,5	6,5	N 1/4	55	9	6	kg 1,767
		Psi 7250	inch 1,65	0,85	3,94	2,76	0,43	2,22	-	4,33	3,84	0,26		2,17	0,35	0,24	lb 3,90
G3K N 3/8	10	MPa 50	mm 53	28,5	115	80	14	71,5	-	180	101	6,5	N 3/8	65	14	10	kg 3,018
		Psi 7250	inch 2,09	1,12	4,53	3,15	0,55	2,81	-	7,09	3,98	0,26		2,56	0,55	0,39	lb 6,65
G3K N 1/2	13	MPa 50	mm 62	33	136	100	14	80,5	-	180	110	8,5	N 1/2	80	14	13	kg 5,247
		Psi 7250	inch 2,44	1,30	5,35	3,94	0,55	3,17	-	7,09	4,33	0,33		3,15	0,55	0,51	lb 11,57
G3K N 3/4	20	MPa 50	mm 68	36	156	113	14	86,5	-	300	116,5	8,5	N 3/4	85	14	20	kg 6,898
		Psi 7250	inch 2,68	1,42	6,14	4,45	0,55	3,41	-	11,81	4,59	0,33		3,35	0,55	0,79	lb 15,21
G3K N 1	25	MPa 50	mm 82	47,5	181	118	14	100,5	138	300	130,5	8,5	N 1	85	14	25	kg 9,005
		Psi 7250	inch 3,23	1,87	7,13	4,65	0,55	3,96	5,43	11,81	5,14	0,33		3,35	0,55	0,98	lb 19,85
G3K N 1 1/4 R	25	MPa 50	mm 82	47,5	181	118	14	100,5	138	300	130,5	8,5	N 1 1/4	85	14	25	kg 8,989
		Psi 7250	inch 3,23	1,87	7,13	4,65	0,55	3,96	5,43	11,81	5,14	0,33		3,35	0,55	0,98	lb 19,82
G3K N 1 1/2 R	32	MPa 50	mm 82	47,5	181	118	14	100,5	138	300	130,5	8,5	N 1 1/2	85	14	25	kg 9,213
		Psi 7250	inch 3,23	1,87	7,13	4,65	0,55	3,96	5,43	11,81	5,14	0,33		3,35	0,55	0,98	lb 20,31

L scheme  
G3 K01T scheme  
G3 K02X scheme  
G3 K14

## G3K DIN ISO 228 BSP

		CS Carbon Steel		
ØLW-K01	ITEM CODE G3K01	ØLW-K01	ITEM CODE G3K01	
6	G23GGT15011A000	6	G23NNT15011A000	
10	G23GGT25011A000	10	G23NNT25011A000	
13	G23GGT34011A000	13	G23NNT34011A000	
19	G23GGT43011A000	19	G23NNT43011A000	
23	G23GGT53011A000	23	G23NNT53011A000	
23	G23GGR63011A000	23	G23NNR63011A000	
23	G23GGR73011A000	23	G23NNR73011A000	


## G3K ANSL/ASME B1.20.1 NPT

ØLW-K02	ITEM CODE G3K02	ØLW-K02	ITEM CODE G3K02
6	G2AGGT15011A000	6	G2ANNT15011A000
10	G2AGGT25011A000	10	G2ANNT25011A000
13	G2AGGT34011A000	13	G2ANNT34011A000
19	G2AGGT43011A000	19	G2ANNT43011A000
23	G2AGGR53011A000	23	G2ANNT53011A000
23	G2AGGR63011A000	23	G2ANNR63011A000
23	G2AGGR73011A000	23	G2ANNR73011A000


ØLW-K14	ITEM CODE G3K14	ØLW-K14	ITEM CODE G3K14
5	G2BGGT15011A000	5	G2BNNT15011A000
7	G2BGGT25011A000	7	G2BNNT25011A000
10	G2BGGT34011A000	10	G2BNNT34011A000
15	G2BGGT43011A000	15	G2BNNT43011A000
17	G2BGGT53011A000	17	G2BNNT53011A000
17	G2BGGR63011A000	17	G2BNNR63011A000
17	G2BGGR73011A000	17	G2BNNR73011A000

## Special schemes on request


G3 K03




G3 K04




G3 K05




G3 K06




G3 K07




G3 K08




G3 K09




G3 K10



G3 K11



G3 K12





# G4K


## 4-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0

### CS Carbon Steel

- Type: ball valve 4 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### STANDARD COMPOSITION OF VALVE

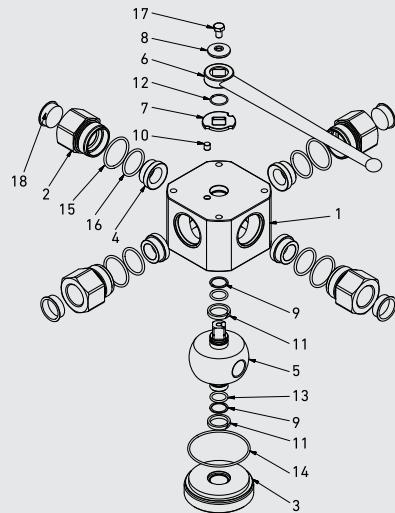

			CS				CS		
POS	DESCRIPTION	Q.TY	Carbon Steel	MATERIAL	POS	DESCRIPTION	Q.TY	Carbon Steel	MATERIAL
1	Body	1		1,0737	11	Body ring	2		PTFE
2	Adapter	4		1,0737	12	Seeger	1		1,4301
3	Stemball adapter	1		1,0737	13	Stemball o-ring	2		NBR
4	Ball seat	4		POM	14	Body o-ring	1		NBR
5	Ball stem	1		1,0737	15	Adapter o-ring	4		NBR
6	Handle	1		ZINC	16	Seal o-ring	4		NBR
7	Washer	1		1,0116	17	Screw	1	DIN 6921 8.8	
8	Washer	1		1,0116	18	Caps	4		PVC
9	Stemball ring	2		PTFE					
10	Pin	1		1,0737					



## CODE DESCRIPTION STRUCTURE

<b>G4K</b>	<b>K01</b>	<b>G1/4</b>	<b>DN6</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>A</b>	<b>B</b>
------------	------------	-------------	------------	----------	----------	----------	----------	----------	----------

**Type and way of valve** \_\_\_\_\_

G4K 4-way

**Type of way** \_\_\_\_\_

L K01  
T K02  
X K14

**Ends** \_\_\_\_\_

GAS DIN/ NPT ANSI  
ISO 228 /ASME  
BSP B1.20.1  
G 1/4 N 1/4  
G 3/8 N 3/8  
G 1/2 N 1/2  
G 3/4 N 3/4  
G 1 N 1  
G 1 1/4 R N 1 1/4 R  
G 1 1/2 R N 1 1/2 R

**Size** \_\_\_\_\_

from DN6 to DN25

**Body Material** \_\_\_\_\_

● 1 = 1,0737

**Adapter material** \_\_\_\_\_

● 1 = 1,0737

**Stem material** \_\_\_\_\_

● 1 = 1,0737

**Ball Material** \_\_\_\_\_

● 1 = 1,0737

**Seat material** \_\_\_\_\_

A = POM


**Seal material** \_\_\_\_\_

B = NBR

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN50 MPa
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

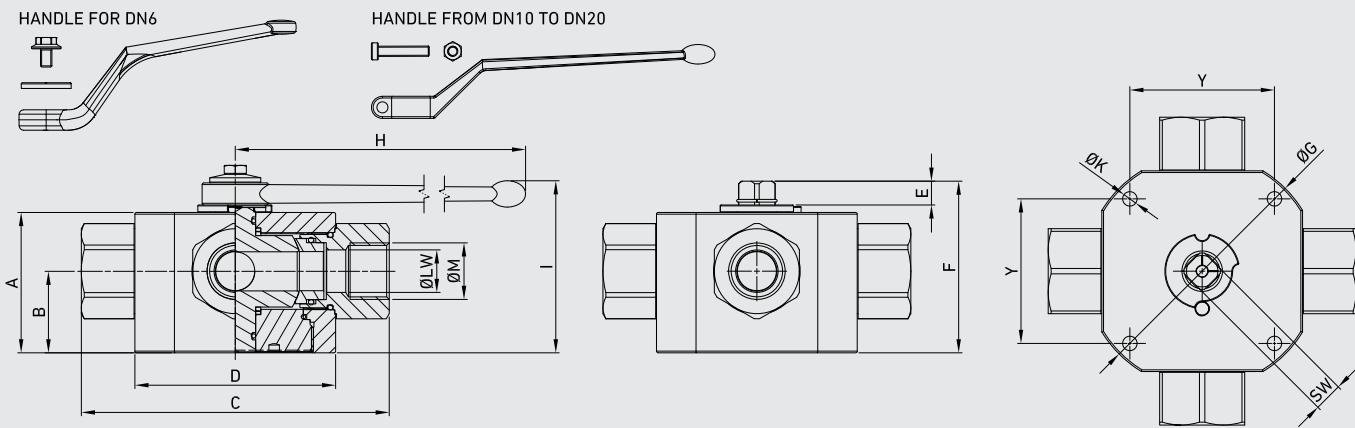

## G4K DIN ISO 228 BSP




TYPE	DN	PN	A	B	C	D	E	F	ØG	H	I	ØK	ØM	Y	SW	ØLW	WEIGHT
G4K G 1/4	6	MPa 50	mm 42	21,5	100	70	11	56,5	-	110	97,5	6,5	G 1/4	55	9	6	kg 1,767
		Psi 7250	inch 1,65	0,85	3,94	2,76	0,43	2,22	-	4,33	3,84	0,26		2,17	0,35	0,24	lb 3,90
G4K G 3/8	10	MPa 50	mm 53	28,5	115	80	14	71,5	-	180	101	6,5	G 3/8	65	14	10	kg 3,018
		Psi 7250	inch 2,09	1,12	4,53	3,15	0,55	2,81	-	7,09	3,98	0,26		2,56	0,55	0,39	lb 6,65
G4K G 1/2	13	MPa 50	mm 62	33	136	100	14	80,5	-	180	110	8,5	G 1/2	80	14	13	kg 5,247
		Psi 7250	inch 2,44	1,30	5,35	3,94	0,55	3,17	-	7,09	4,33	0,33		3,15	0,55	0,51	lb 11,57
G4K G 3/4	20	MPa 50	mm 68	36	156	113	14	86,5	-	300	116,5	8,5	G 3/4	85	14	20	kg 6,898
		Psi 7250	inch 2,68	1,42	6,14	4,45	0,55	3,41	-	11,81	4,59	0,33		3,35	0,55	0,79	lb 15,21
G4K G 1	25	MPa 50	mm 82	47,5	181	118	14	100,5	138	300	130,5	8,5	G 1	85	14	25	kg 9,005
		Psi 7250	inch 3,23	1,87	7,13	4,65	0,55	3,96	5,43	11,81	5,14	0,33		3,35	0,55	0,98	lb 19,85
G4K G 1 1/4 R	25	MPa 50	mm 82	47,5	181	118	14	100,5	138	300	130,5	8,5	G 1 1/4	85	14	25	kg 8,989
		Psi 7250	inch 3,23	1,87	7,13	4,65	0,55	3,96	5,43	11,81	5,14	0,33		3,35	0,55	0,98	lb 19,82
G4K G 1 1/2 R	25	MPa 50	mm 82	47,5	181	118	14	100,5	138	300	130,5	8,5	G 1 1/2	85	14	25	kg 9,213
		Psi 7250	inch 3,23	1,87	7,13	4,65	0,55	3,96	5,43	11,81	5,14	0,33		3,35	0,55	0,98	lb 20,31

## G4K ANSI/ASME B1.20.1 NPT

TYPE	DN	PN	A	B	C	D	E	F	ØG	H	I	ØK	ØM	Y	SW	ØLW	WEIGHT
G4K N 1/4	6	MPa 50	mm 42	21,5	100	70	11	56,5	-	110	97,5	6,5	N 1/4	55	9	6	kg 1,767
		Psi 7250	inch 1,65	0,85	3,94	2,76	0,43	2,22	-	4,33	3,84	0,26		2,17	0,35	0,24	lb 3,90
G4K N 3/8	10	MPa 50	mm 53	28,5	115	80	14	71,5	-	180	101	6,5	N 3/8	65	14	10	kg 3,018
		Psi 7250	inch 2,09	1,12	4,53	3,15	0,55	2,81	-	7,09	3,98	0,26		2,56	0,55	0,39	lb 6,65
G4K N 1/2	13	MPa 50	mm 62	33	136	100	14	80,5	-	180	110	8,5	N 1/2	80	14	13	kg 5,247
		Psi 7250	inch 2,44	1,30	5,35	3,94	0,55	3,17	-	7,09	4,33	0,33		3,15	0,55	0,51	lb 11,57
G4K N 3/4	20	MPa 50	mm 68	36	156	113	14	86,5	-	300	116,5	8,5	N 3/4	85	14	20	kg 6,898
		Psi 7250	inch 2,68	1,42	6,14	4,45	0,55	3,41	-	11,81	4,59	0,33		3,35	0,55	0,79	lb 15,21
G4K N 1	25	MPa 50	mm 82	47,5	181	118	14	100,5	138	300	130,5	8,5	N 1	85	14	25	kg 9,005
		Psi 7250	inch 3,23	1,87	7,13	4,65	0,55	3,96	5,43	11,81	5,14	0,33		3,35	0,55	0,98	lb 19,85
G4K N 1 1/4 R	25	MPa 50	mm 82	47,5	181	118	14	100,5	138	300	130,5	8,5	N 1 1/4	85	14	25	kg 8,989
		Psi 7250	inch 3,23	1,87	7,13	4,65	0,55	3,96	5,43	11,81	5,14	0,33		3,35	0,55	0,98	lb 19,82
G4K N 1 1/2 R	25	MPa 50	mm 82	47,5	181	118	14	100,5	138	300	130,5	8,5	N 1 1/2	85	14	25	kg 9,213
		Psi 7250	inch 3,23	1,87	7,13	4,65	0,55	3,96	5,43	11,81	5,14	0,33		3,35	0,55	0,98	lb 20,31

## ■ G4K DIN ISO 228 BSP

## ■ G4K ANSL/ASME B1.20.1 NPT

L scheme  
G4 K01T scheme  
G4 K13X scheme  
G4 K14


		CS Carbon Steel		CS Carbon Steel	
		ITEM CODE G4K01		ITEM CODE G4K01	
Ø	LW-K01	6	G24GGT15011A000	6	G24NNT15011A000
		10	G24GGT25011A000	10	G24NNT25011A000
		13	G24GGT34011A000	13	G24NNT34011A000
		19	G24GGT43011A000	19	G24NNT43011A000
		23	G24GGT53011A000	23	G24NNT53011A000
		23	G24GGR63011A000	23	G24NNR63011A000
		23	G24GGR73011A000	23	G24NNR73011A000

Ø	LW-K13	ITEM CODE G4K13	Ø	LW-K13	ITEM CODE G4K13
Ø	LW-K13	6	G2DG GT15011A000	6	G2DN NT15011A000
		10	G2DG GT25011A000	10	G2DN NT25011A000
		13	G2DG GT34011A000	13	G2DN NT34011A000
		19	G2DG GT43011A000	19	G2DN NT43011A000
		23	G2DG GT53011A000	23	G2DN NT53011A000
		23	G2DG GR63011A000	23	G2DN NR63011A000
		23	G2DG GR73011A000	23	G2DN NR73011A000


Ø	LW-K14	ITEM CODE G4K14	Ø	LW-K14	ITEM CODE G3K14
Ø	LW-K14	5	G2EG GT15011A000	5	G2EN NT15011A000
		7	G2EG GT25011A000	7	G2EN NT25011A000
		10	G2EG GT34011A000	10	G2EN NT34011A000
		15	G2EG GT43011A000	15	G2EN NT43011A000
		17	G2EG GT53011A000	17	G2EN NT53011A000
		17	G2EG GR63011A000	17	G2EN NR63011A000
		17	G2EG GR73011A000	17	G2EN NR73011A000

## ■ Special schemes on request


G4 K15




G4 K19




G4 K23




G4 K27




G4 K16




G4 K20




G4 K24




G4 K17




G4 K21




G4 K25




G4 K18



G4 K22



G4 K26





# GPK2


## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0

### **CS Carbon Steel**

- Type: manifold
- Sizes: from DN6 up to DN50
- Ends: Drilling pattern Gemels
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### **STANDARD COMPOSITION OF VALVE**

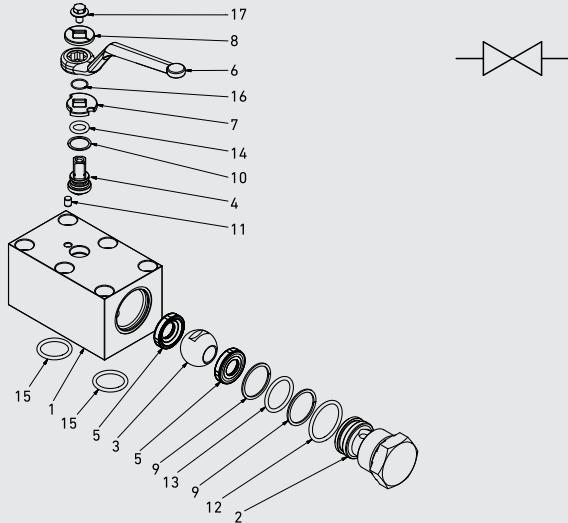

			CS					CS	
			Carbon Steel					Carbon Steel	
POS	DESCRIPTION	Q.TY	MATERIAL		POS	DESCRIPTION	Q.TY	MATERIAL	
1	Body	1	1,0737		11	Seeger	1	1,4301	
2	Adapter	1	1,0737		12	Adapter o-ring	1	NBR	
3	Ball	1	1,0737		13	Adapter o-ring	1	NBR	
4	Stem	1	1,0737		14	Body o-ring	2	NBR	
5	Ball seat	2	POM		15	Stem o-ring	1	NBR	
6	Handle	1	ZINC		16	Screw	1	Din 6921 8.8	
7	Washer	1	1,0116		17	Back-Up	2	PTFE	
8	Washer	1	1,0116						
9	Stem ring	1	POM						
10	Pin	1	1,0737						



## CODE DESCRIPTION STRUCTURE

<b>GPK2</b>	<b>DN13</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>A</b>	<b>B</b>
-------------	-------------	----------	----------	----------	----------	----------	----------

Type and way of valve \_\_\_\_\_

GPK2 2-way

Size \_\_\_\_\_

from DN6 to DN50

Body Material \_\_\_\_\_

● 1 = 1,0737

Adapter material \_\_\_\_\_

● 1 = 1,0737

Stem material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Ball Material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\*


\*On request

- Reduced bore
- Pressure class up to PN50 MPa
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

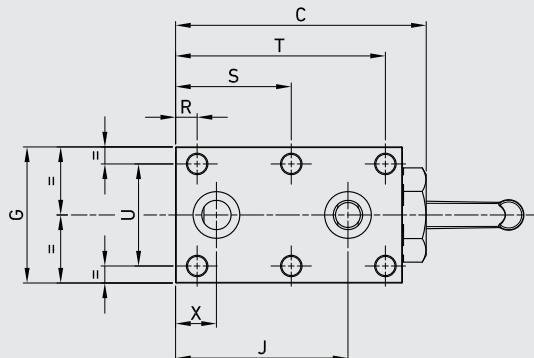



HANDLE FOR DN6



HANDLE FROM DN20 TO DN25




HANDLE FROM DN32 TO DN50

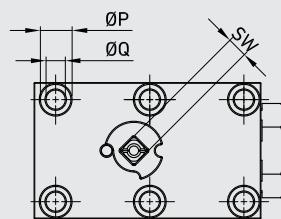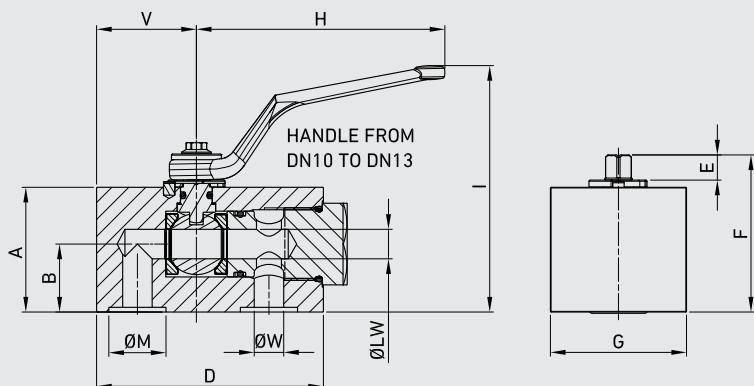

## ■ GPK2 DIN ISO 228 BSP


**CS**  
Carbon Steel  
ITEM CODE

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	J	ØM	ØP	ØQ	R	S	T	U	V	ØW	X	SW	ØLW	WEIGHT	
GPK2	6	MPa 50	mm 35	22,5	64,5	58	7,5	42,5	40	60	61	44,5	11,8	10,5	6,5	9	-	44	27	26,5	6	9,5	6	kg 0,593	GP200T15011A000	
		Psi 7250	inch 1,38	0,89	2,54	2,28	0,30	1,67	1,57	2,36	2,40	1,75	0,46	0,41	0,26	0,35	-	1,73	1,06	1,04	0,24	0,37	0,24	0,24	lb 1,31	
GPK2	10	MPa 50	mm 45	22,5	79,5	70	11	59	55	110	101	54	14,9	13,5	8,5	7,5	-	62,5	40	28,75	9,8	10	9	10	kg 1,304	GP200T25011A000
		Psi 7250	inch 1,77	0,89	3,13	2,76	0,43	2,32	2,17	4,33	3,98	2,13	0,59	0,53	0,33	0,30	-	2,46	1,57	1,13	0,39	0,39	0,35	0,39	lb 2,87	
GPK2	13	MPa 40	mm 55	30	110,5	100	11	69	60	110	111	76	24,9	13,5	8,5	9,5	51	92,5	45	44	13	18	9	13	kg 2,387	GP200T34011A000
		Psi 5800	inch 2,17	1,18	4,35	3,94	0,43	2,72	2,36	4,33	4,37	2,99	0,98	0,53	0,33	0,37	2,01	3,64	1,77	1,73	0,51	0,71	0,35	0,51	lb 5,26	
GPK2	20	MPa 35	mm 70	38,5	129	118	14	88,5	70	180	121,5	90	29	16,5	10,5	11,5	60	108,5	51	52	20	21	14	20	kg 4,079	GP200T43011A000
		Psi 5075	inch 2,76	1,52	5,08	4,65	0,55	3,48	2,76	7,09	4,78	3,54	1,14	0,65	0,41	0,45	2,36	4,27	2,01	2,05	0,79	0,83	0,55	0,79	lb 8,99	
GPK2	25	MPa 35	mm 79,5	44	146	135	14	98	80	180	131	105	34,9	16,5	10,5	9	66,5	124	60	61,25	25	24	14	25	kg 5,883	GP200T53011A000
		Psi 5075	inch 3,13	1,73	5,75	5,31	0,55	3,86	3,15	7,09	5,16	4,13	1,37	0,65	0,41	0,35	2,62	4,88	2,36	2,41	0,98	0,94	0,55	0,98	lb 12,97	
GPK2	32	MPa 35	mm 105,558,75183,5	165	14	124	100	300	124	124	39,7	19	13	11	79	147	78	74	32	28	17	32	kg 12,169	GP200T63011A000		
		Psi 5075	inch 4,15	2,31	7,22	6,50	0,55	4,88	3,94	11,81	4,88	4,88	1,56	0,75	0,51	0,43	3,11	5,79	3,07	2,91	1,26	1,10	0,67	1,26	lb 26,83	
GPK2	40	MPa 35	mm 115,61,25201,5	185	14	133,5	130	300	134	141	47,7	25	16,5	29	85	141	95	85	37	29	17	40	kg 18,624	GP200T73011A000		
		Psi 5075	inch 4,53	2,41	7,93	7,28	0,55	5,26	5,12	11,81	5,28	5,55	1,88	0,98	0,65	1,14	3,35	5,55	3,74	3,35	1,46	1,14	0,67	1,57	lb 41,06	
GPK2	50	MPa 35	mm 129	72	256,5	240	14	147	150	300	147,5	174	59,8	31	21	38	106	174	112	106	48	38	17	48	kg 30,644	GP200T83011A000
		Psi 5075	inch 5,08	2,83	10,10	9,45	0,55	5,79	5,91	11,81	5,81	6,85	2,35	1,22	0,83	1,50	4,17	6,85	4,41	4,17	1,89	1,50	0,67	1,89	lb 67,56	

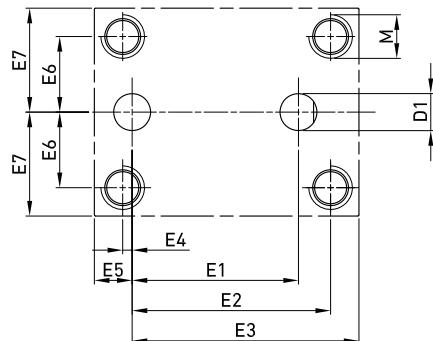

## DRILLING PATTERN FOR DN6 TO DN10

DN	D1	E1	E2	E3	E4	E5	E6	E7	M	O-RING
6	mm 6	35	34,5	48,5	0,5	9,5	13,5	20	M6	7,30 X 2,40
	inch 0,24	1,38	1,36	1,91	0,02	0,37	0,53	0,79		
10	mm 9,5	44	52,5	60	2,5	10	20	27,5	M8	9,92 X 2,62
	inch 0,37	1,73	2,07	2,36	0,10	0,39	0,79	1,08		

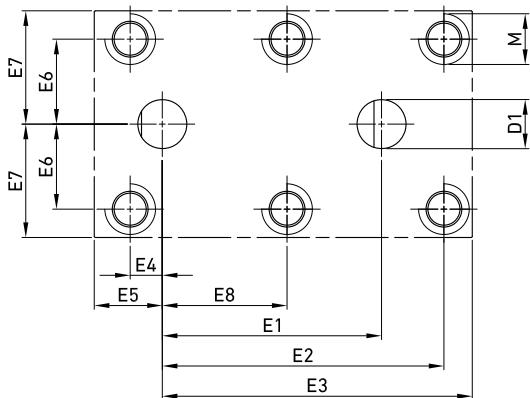

## DRILLING PATTERN FOR DN13 TO DN50

DN	D1	E1	E2	E3	E4	E5	E6	E7	E8	M	O-RING
13	mm 13	58	74,5	82	8,5	18	22,5	30	33	M8	20,64 X 2,62
	inch 0,51	2,28	2,93	3,23	0,33	0,71	0,89	1,18	1,30		
20	mm 20	69	87,5	97	9,5	21	25,5	35	39	M10	23,81 X 2,62
	inch 0,79	2,72	3,44	3,82	0,37	0,83	1,00	1,38	1,54		
25	mm 25	81	100	111	15	24	30	40	43	M10	31,42 X 2,62
	inch 0,98	3,19	3,94	4,37	0,59	0,94	1,18	1,57	1,69		
32	mm 32	96	119	137	17	28	39	50	51	M12	34,59 X 2,62
	inch 1,26	3,78	4,69	5,39	0,67	1,10	3,07	1,97	2,01		
40	mm 37	-	112	156	-	29	47,5	65	56	M16	42,52 X 2,62
	inch 1,46	-	4,41	6,14	-	1,14	1,87	2,56	2,20		
50	mm 48	-	136	202	-	38	56	75	68	M20	53,64 X 2,62
	inch 1,89	-	5,35	7,95	-	1,50	2,20	2,95	2,68		



# GPK3


## 3-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0

### Carbon Steel

- Type: manifold
- Sizes: from DN6 up to DN50
- Ends: Drilling pattern Gemels
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### STANDARD COMPOSITION OF VALVE

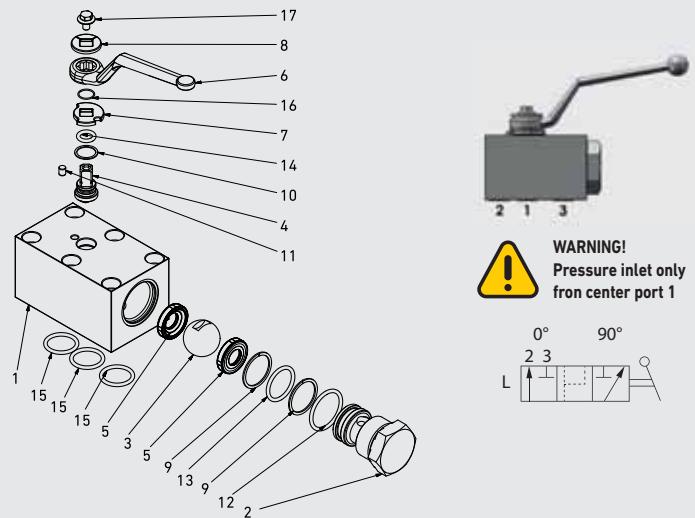

			CS					CS	
			Carbon Steel					Carbon Steel	
POS	DESCRIPTION	Q.TY	MATERIAL		POS	DESCRIPTION	Q.TY	MATERIAL	
1	Body	1	1,0737		11	Seeger	1	1,4301	
2	Adapter	1	1,0737		12	Adapter o-ring	1	NBR	
3	Ball	1	1,0737		13	Adapter o-ring	1	NBR	
4	Stem	1	1,0737		14	Body o-ring	3	NBR	
5	Ball seat	2	POM		15	Stem o-ring	1	NBR	
6	Handle	1	ZINC		16	Screw	1	Din 6921 8.8	
7	Washer	1	1,0116		17	Back-Up	2	PTFE	
8	Washer	1	1,0116						
9	Stem ring	1	POM						
10	Pin	1	1,0737						



## CODE DESCRIPTION STRUCTURE

<b>GPK3</b>	<b>DN13</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>A</b>	<b>B</b>
-------------	-------------	----------	----------	----------	----------	----------	----------

Type and way of valve \_\_\_\_\_

GPK3 3-way

Size \_\_\_\_\_

from DN6 to DN50

Body Material \_\_\_\_\_

● 1 = 1,0737

Adapter material \_\_\_\_\_

● 1 = 1,0737

Stem material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Ball Material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\*


\*On request

- Reduced bore
- Pressure class up to PN50 MPa
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

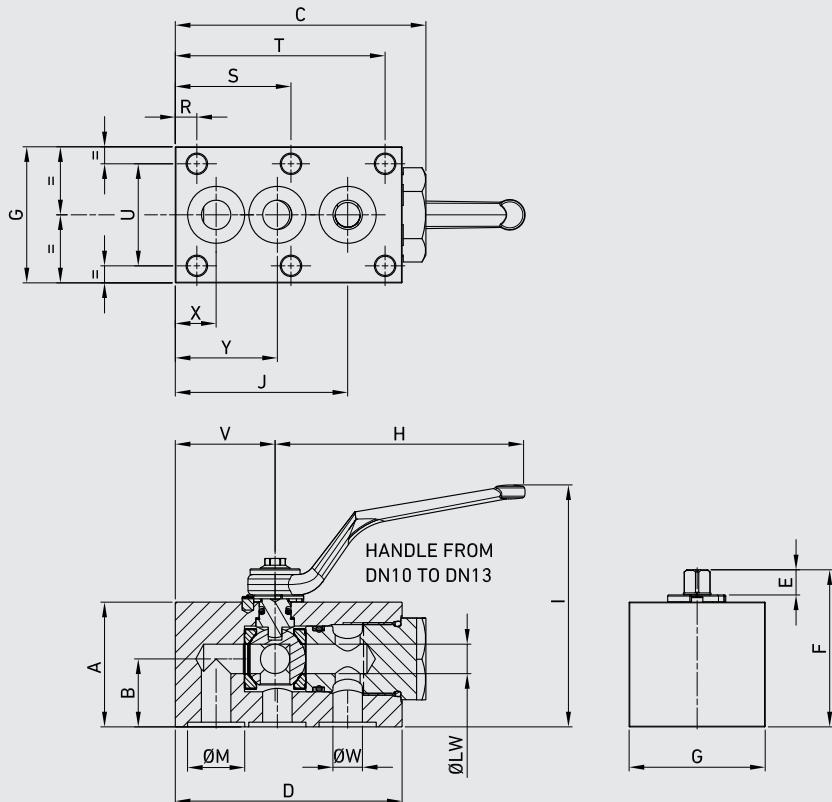


HANDLE FOR DN6



HANDLE FROM DN20 TO DN25




HANDLE FROM DN32 TO DN50

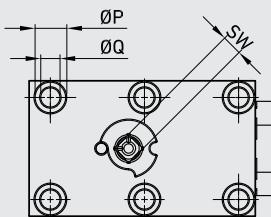**GPK3 DIN ISO 228 BSP**


**CS**  
Carbon Steel  
ITEM CODE

TYPE	DN	PN	A	B	C	D	E	F	G	H	I	J	ØM	ØP	ØQ	R	S	T	U	V	ØW	X	Y	SW	ØLW	WEIGHT	ITEM CODE
GPK3	6	MPa 50 Psi 7250	mm 35	22,5	65	58	7,5	42,5	40	110	61	44,5	11,8	10,5	6,5	9	-	44	27	26,5	6	9,5	27	6	6	kg 0,593 lb 1,31	GP300T15011A000
GPK3	10	MPa 50 Psi 7250	mm 45	22,5	80	70	11	59	55	110	101	54	14,9	13,5	8,5	7,5	-	62,5	40	28,75	9,8	10	29	9	10	kg 1,304 lb 2,87	GP300T25011A000
GPK3	13	MPa 40 Psi 5800	mm 55	30	111	100	11	69	60	110	111	76	24,9	13,5	8,5	9,5	51	92,5	45	44	13	18	44,5	9	13	kg 2,387 lb 5,26	GP300T34011A000
GPK3	20	MPa 35 Psi 5075	mm 70	38,5	129	118	14	88,5	70	180	121,5	90	29	16,5	10,5	11,5	60	108,5	51	52	20	21	52	14	20	kg 4,079 lb 8,99	GP300T43011A000
GPK3	25	MPa 35 Psi 5075	mm 80	44	146	135	14	98	80	180	131	105	34,9	16,5	10,5	9	66,5	124	60	61,25	25	24	62	14	25	kg 5,883 lb 12,97	GP300T53011A000
GPK3	32	MPa 35 Psi 5075	mm 106	58,8	184	165	14	124	100	300	124	124	39,7	19	13	11	79	147	78	74	32	28	74	17	32	kg 12,169 lb 26,83	GP300T63011A000
GPK3	40	MPa 35 Psi 5075	mm 115	61,3	202	185	14	133,5	130	300	134	141	47,7	25	16,5	29	85	141	95	85	37	29	85	17	40	kg 18,624 lb 41,06	GP300T73011A000
GPK3	50	MPa 35 Psi 5075	mm 129	72	257	240	14	147	150	300	147,5	174	59,8	31	21	38	106	174	112	106	48	38	106	17	48	kg 30,644 lb 67,56	GP300T83011A000

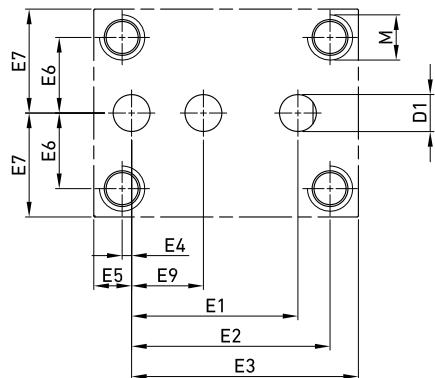

## DRILLING PATTERN FOR DN6 TO DN10

DN		D1	E1	E2	E3	E4	E5	E6	E7	E9	M	O-RING
6	mm	6	35	34,5	48,5	0,5	9,5	13,5	20	20		
	inch	0,24	1,38	1,36	1,91	0,02	0,37	0,53	0,79	0,79	M6	7,30 X 2,40
10	mm	9,5	44	52,5	60	2,5	10	20	27,5	27,5		
	inch	0,37	1,73	2,07	2,36	0,10	0,39	0,79	1,08	1,08	M8	9,92 X 2,62

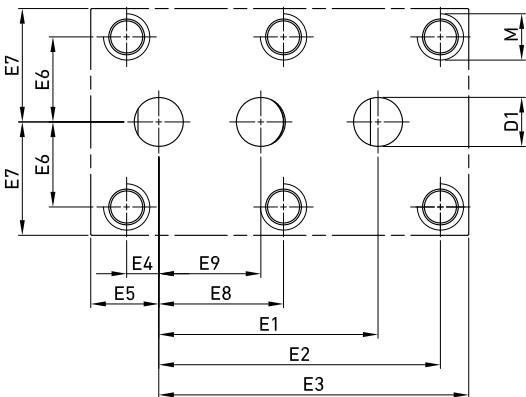

## DRILLING PATTERN FOR DN13 TO DN50

DN		D1	E1	E2	E3	E4	E5	E6	E7	E8	E9	M	O-RING
13	mm	13	58	74,5	82	8,5	18	22,5	30	33	27		
	inch	0,51	2,28	2,93	3,23	0,33	0,71	0,89	1,18	1,30	1,06	M8	20,64 X 2,62
20	mm	20	69	87,5	97	9,5	21	25,5	35	39	31		
	inch	0,79	2,72	3,44	3,82	0,37	0,83	1,00	1,38	1,54	1,22	M10	23,81 X 2,62
25	mm	25	81	100	111	15	24	30	40	43	38		
	inch	0,98	3,19	3,94	4,37	0,59	0,94	1,18	1,57	1,69	1,50	M10	31,42 X 2,62
32	mm	32	96	119	137	17	28	39	50	51	46		
	inch	1,26	3,78	4,69	5,39	0,67	1,10	1,54	1,97	2,01	1,81	M12	34,59 X 2,62
40	mm	37	112	112	156	-	29	47,5	65	56	56		
	inch	1,46	4,41	4,41	6,14	-	1,14	1,87	2,56	2,20	2,20	M16	42,52 X 2,62
50	mm	48	136	136	202	-	38	56	75	68	68		
	inch	1,89	5,35	5,35	7,95	-	1,50	2,20	2,95	2,68	2,68	M20	53,64 X 2,62



# GRC

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0


### **CS** Carbon Steel

- Type: ball valve 2 way
- Sizes: from DN25 up to DN125
- Ends: ISO6162-1 / ISO6162 (SAE J518) / ISO6164 (CETOP)
- Pressure: up to PN420 / S6000
- Temp range: from -20°C to +100°C

### **SS** Stainless Steel

- Type: ball valve 2 way
- Sizes: from DN25 up to DN125
- Ends: ISO6162-1 / ISO6162 (SAE J518) / ISO6164 (CETOP)
- Pressure: up to PN420 / S6000
- Temp range: from -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

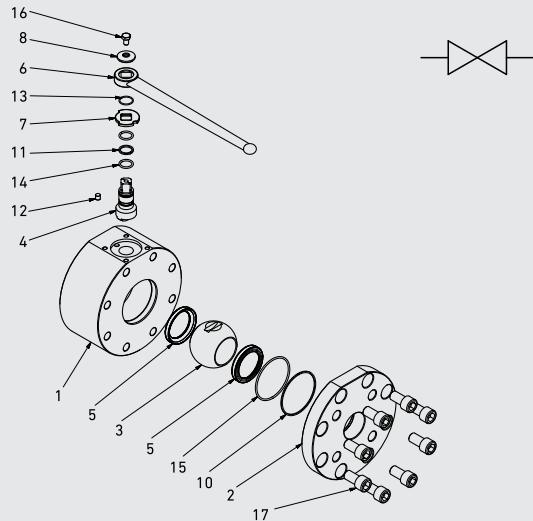

POS	DESCRIPTION	Q.TY	<b>CS</b>	<b>SS</b>
			Carbon Steel	Stainless Steel
1	Body	1	1,0570	1,4404
2	Flange	1	1,0570	1,4404
3	Ball	1	1,0570	1,4404
4	Stem	1	1,4542	1,4542
5	Seat	2	POM	POM
6	Handle	1	1,0116	1,0116
7	Washer	1	1,0116	1,0116
8	Washer	1	1,0116	1,0116
9	Flange Back-Up	1	PTFE	PTFE
10	Stem Back-Up	1	PTFE	PTFE
11	Stem Ring	1	PTFE	PTFE
12	Pin	1	1,0737	1,4404
13	Flange o-ring	1	NBR	NBR
14	Stem o-ring	2	NBR	NBR
15	Seeger	1	1,4301	1,4301
16	T.C.E.I. Screw	8	DIN6921 8.8	ISO4762 A2
17	T.E. Screw	1	DIN6921 8.8	ISO4762 A2



## CODE DESCRIPTION STRUCTURE

**GRC 250 DN50 2 2 M 2 A B**

Type and way of valve \_\_\_\_\_

GRC 2-way

Ends \_\_\_\_\_

VALVE DIMENSION  
OF PRESSURE (PSI)

PN250

PN350

PN400

Size \_\_\_\_\_

from DN25 to DN125

Body Material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Stem material \_\_\_\_\_

- M = 1,4542
- M = 1,4542

Ball Material \_\_\_\_\_

- 2 = 1,0570 4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN40 Mpa
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

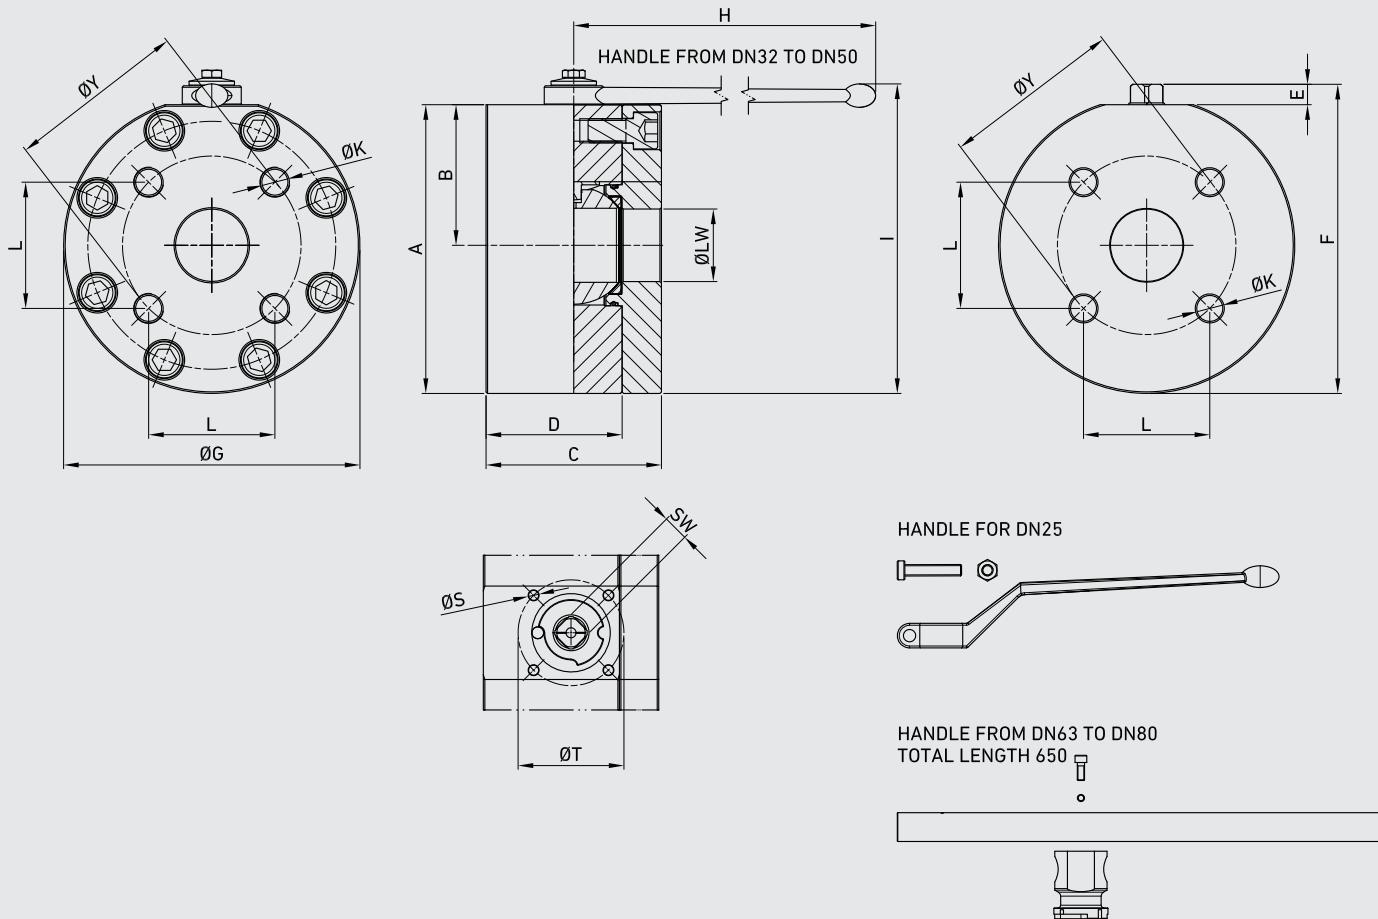

## GRC CETOP250 ISO6164

**CS** Carbon Steel    **SS** Stainless Steel

TYPE	DN	PN	A	B	C	D	E	F	ØG	H	I	L	ØK	ØT	ØS	ØY	ISO5211	SW	ØLW	WEIGHT	ITEM CODE
GRC250	25	MPa 25	mm 98,5	39,5	88	69	14	113	118	180	143	43,8	4x	50	M6	62	F05	14	25	kg 6,317	GR2CTT52022A000
		Psi 3625	inch 3,88	1,56	3,46	2,72	0,55	4,45	4,65	7,09	5,63	1,72	M10	1,97	M6	2,44		0,55	0,98	lb 13,93	GR2CTT52044A000
GRC250	32	MPa 25	mm 143,5	71	100	73	14	162	145	300	162	51,6	4x	50	M6	73	F05	17	32	kg 12,228	GR2CTT6202PA000
		Psi 3625	inch 5,65	2,80	3,94	2,87	0,55	6,38	5,71	11,81	6,38	2,03	M12	1,97	M6	2,87		0,67	1,26	lb 26,96	GR2CTT6204NA000
GRC250	38	MPa 25	mm 160	78	110	80	14	178,5	165	300	180	60,1	4x	50	M6	85	F05	17	38	kg 16,867	GR2CTT7202PA000
		Psi 3625	inch 6,30	3,07	4,33	3,15	0,55	7,03	6,50	11,81	7,09	2,37	M16	1,97	M6	3,35		0,67	1,50	lb 37,19	GR2CTT7204NA000
GRC250	51	MPa 25	mm 192	93	116	90	14	206	196	300	205	69,3	4x	70	M8	98	F07	17	47	kg 32,855	GR2CTT8202PA000
		Psi 3625	inch 7,56	3,66	4,57	3,54	0,55	8,11	7,72	11,81	8,07	2,73	M16	2,76	M8	3,86		0,67	1,85	lb 72,43	GR2CTT8204NA000
GRC250	56	MPa 25	mm 192	93	150	107	14	206	203	300	206	83,4	4x	70	M8	118	F07	17	58	kg 32,855	GR2CTT9202PA000
		Psi 3625	inch 7,56	3,66	5,91	4,21	0,55	8,11	7,99	11,81	8,11	3,28	M20	2,76	M8	4,65		0,67	2,28	lb 72,43	GR2CTT9204NA000
GRC250	63	MPa 25	mm 205	100	150	107	18	223	210	600	272	102,5	4x	70	M8	145	F07	19	70	kg 36,569	GR2CTTA202PA000
		Psi 3625	inch 8,07	3,94	5,91	4,21	0,71	8,78	8,27	23,62	10,71	4,04	M20	2,76	M8	5,71		0,75	2,76	lb 80,62	GR2CTTA204NA000

**GRC CETOP350 ISO6164**

TYPE	DN	PN	A	B	C	D	E	F	ØG	H	I	L	ØK	ØT	ØS	ØY	ISO5211	SW	ØLW	WEIGHT	ITEM CODE	CS Carbon Steel	SS Stainless Steel
GRC350	25	MPa 35 Psi 5075	mm 102,5 inch 4,04	39,5 1,56	88 3,46	69 2,72	14 0,55	117 4,61	118 4,65	180 7,09	143 5,63	50,9 2,00	4x M12	50 1,97	M6 M6	72 2,83	F05 F05	14 0,55	25 0,98	kg 7,2 lb 15,87	GR2CTT53022A000	GR2CTT53044A000	
GRC350	32	MPa 35 Psi 5075	mm 141 inch 5,55	68 2,68	105 4,13	75,5 2,97	14 0,55	158 6,22	145 5,71	300 11,81	162 6,38	56,6 2,23	4x M16	50 1,97	M6 M6	80 3,15	F05 F05	17 0,67	32 1,26	kg 12,5 lb 27,56	GR2CTT6302PA000	GR2CTT6304NA000	
GRC350	40	MPa 35 Psi 5075	mm 161 inch 6,34	78 3,07	110 4,33	80 3,15	14 0,55	178 7,01	165 6,50	300 11,81	180 7,09	69,5 2,74	4x M16	50 1,97	M6 M6	98 3,86	F05 F05	17 0,67	38 1,50	kg 16,6 lb 36,60	GR2CTT7302PA000	GR2CTT7304NA000	
GRC350	50	MPa 35 Psi 5075	mm 193 inch 7,60	94 3,70	116 4,57	90 3,54	14 0,55	210 8,27	196 7,72	300 11,81	205 8,07	83,5 3,29	4x M20	70 2,76	M8 M8	118 4,65	F07 F07	17 0,67	48 1,89	kg 25 lb 55,12	GR2CTT8302PA000	GR2CTT8304NA000	
GRC350	65	MPa 35 Psi 5075	mm 204 inch 8,03	100 3,94	150 5,91	107 4,21	21 0,83	224 8,82	208 8,19	600 23,62	272 10,71	102,5 4,04	4x M24	70 2,76	M8 M8	145 5,71	F07 F07	19 0,75	63 2,48	kg 44 lb 97,00	GR2CTT9302PA000	GR2CTT9304NA000	
GRC350	80	MPa 35 Psi 5075	mm 208 inch 8,19	100 3,94	150 5,91	107 4,21	22 0,87	233,5 9,19	215 8,46	600 23,62	280 11,02	123,7 4,87	4x M30	70 2,76	M8 M8	175 6,89	F07 F07	19 0,75	75 2,95	kg 45 lb 99,21	GR2CTTA302PA000	GR2CTTA304NA000	
GRC350	100	MPa 35 Psi 5075	mm 251 inch 9,88	122 4,80	200 7,87	147 5,79	26,5 1,04	277 10,91	258 10,16	600 23,62	326 12,83	141,5 5,57	8x M24	102 4,02	M10 M10	200 7,87	F10 F10	24 0,94	95 3,74	kg 70 lb 154,32	GR2CTTB302PA000	GR2CTTB304NA000	
GRC350	125	MPa 35 Psi 5075	mm 303 inch 11,93	148 5,83	220 8,66	170 6,69	32 1,26	330 12,99	310 12,20	900 35,43	389 15,31	- -	8x M30	125 4,92	M12 M12	245 9,65	F12 F12	36 1,42	118 4,65	kg 109 lb 240,30	GR2CTTC302PA000	GR2CTTC304NA000	

**GRC CETOP400 ISO6164**

TYPE	DN	PN	A	B	C	D	E	F	ØG	H	I	L	ØK	ØT	ØS	ØY	ISO5211	SW	ØLW	WEIGHT	ITEM CODE	CS Carbon Steel	SS Stainless Steel
GRC400	25	MPa 40 Psi 5800	mm 98,5 inch 3,88	39,5 1,56	88 3,46	69 2,72	14 0,55	113 4,45	118 4,65	180 7,09	143 5,63	43,8 1,72	4x M10	50 1,97	M6 M6	62 2,44	F05 F05	14 0,55	25 0,98	kg 6,317 lb 13,93	GR2CTT54022A000	GR2CTT54044A000	
GRC400	32	MPa 40 Psi 5800	mm 143,5 inch 5,65	71 2,80	100 3,94	73 2,87	14 0,55	162 6,38	145 5,71	300 11,81	162 6,38	51,6 2,03	4x M12	50 1,97	M6 M6	73 2,87	F05 F05	17 0,67	32 1,26	kg 12,228 lb 26,96	GR2CTT6402PA000	GR2CTT6404NA000	
GRC400	38	MPa 40 Psi 5800	mm 160 inch 6,30	78 3,07	110 4,33	80 3,15	14 0,55	178,5 7,03	165 6,50	300 11,81	180 7,09	60,1 2,37	4x M16	50 1,97	M6 M6	85 3,35	F05 F05	17 0,67	38 1,50	kg 16,867 lb 37,19	GR2CTT7402PA000	GR2CTT7404NA000	
GRC400	51	MPa 40 Psi 5800	mm 192 inch 7,56	93 3,66	116 4,57	90 3,54	14 0,55	206 8,11	196 7,72	300 11,81	205 8,07	69,3 2,73	4x M16	70 2,76	M8 M8	98 3,86	F07 F07	17 0,67	47 1,85	kg 32,855 lb 72,43	GR2CTT8402PA000	GR2CTT8404NA000	
GRC400	56	MPa 40 Psi 5800	mm 192 inch 7,56	93 3,66	150 5,91	107 4,21	14 0,55	206 8,11	203 7,99	300 11,81	208 8,19	83,4 3,28	4x M20	70 2,76	M8 M8	118 4,65	F07 F07	17 0,67	58 2,28	kg 32,855 lb 72,43	GR2CTT9402PA000	GR2CTT9404NA000	
GRC400	63	MPa 40 Psi 5800	mm 205 inch 8,07	100 3,94	150 5,91	107 4,21	18 0,71	223 8,78	210 8,27	600 23,62	272 10,71	102,5 4,04	4x M24	70 2,76	M8 M8	145 5,71	F07 F07	19 0,75	70 2,76	kg 36,569 lb 80,62	GR2CTTA402PA000	GR2CTTA404NA000	
GRC400	80	MPa 40 Psi 5800	mm 251 inch 9,88	122 4,80	170 5,20	132 1,04	26,5 10,94	278 10,16	258 23,62	600 12,83	326 4,87	123,7 M30	4x 4,02	102 M10	175 6,89	F10 F10	24 0,94	74 2,91	kg 65,411 lb 144,21	GR2CTTB402PA000	GR2CTTB404NA000		



# GRS

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0


### **CS Carbon Steel**

- Type: ball valve 2 way
- Sizes: from DN13 up to DN125
- Ends: ISO6162-1 / ISO6162 (SAE J518) / ISO6164 (CETOP)
- Pressure: up to PN420 / S6000
- Temp range: from -20°C to +100°C

### **SS Stainless Steel**

- Type: ball valve 2 way
- Sizes: from DN13 up to DN125
- Ends: ISO6162-1 / ISO6162 (SAE J518) / ISO6164 (CETOP)
- Pressure: up to PN420 / S6000
- Temp range: from -30°C to +100°C

### **STANDARD COMPOSITION OF VALVE**

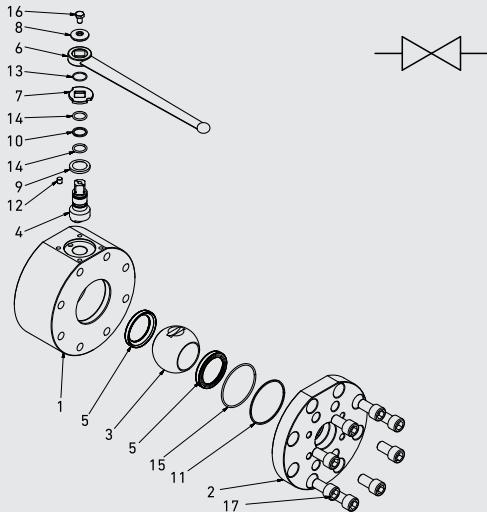

POS	DESCRIPTION	Q.TY	CS	SS
			Carbon Steel	Stainless Steel
1	Body	1	1,0570	1,4404
2	Flange	1	1,0570	1,4404
3	Ball	1	1,0570	1,4404
4	Stem	1	1,4542	1,4542
5	Seat	2	POM	POM
6	Handle	1	1,0116	1,0116
7	Washer	1	1,0116	1,0116
8	Washer	1	1,0116	1,0116
9	Flange Back-Up	1	PTFE	PTFE
10	Stem Back-Up	1	PTFE	PTFE
11	Stem Ring	1	PTFE	PTFE
12	Pin	1	1,0737	1,4404
13	Flange o-ring	1	NBR	NBR
14	Stem o-ring	2	NBR	NBR
15	Seeger	1	1,4301	1,4301
16	T.C.E.I. Screw	8	DIN6921 8.8	ISO4762 A2
17	T.E. Screw	1	DIN6921 8.8	ISO4762 A2



## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GRS 2-way

Ends \_\_\_\_\_

VALVE DIMENSION  
OF PRESSURE (PSI)

S3 S6  
S3000 S6000

Size \_\_\_\_\_

from DN13 to DN125

Body Material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Stem material \_\_\_\_\_

- M = 1,4542
- M = 1,4542

Ball Material \_\_\_\_\_

- 2 = 1,0570 4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN40 Mpa
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

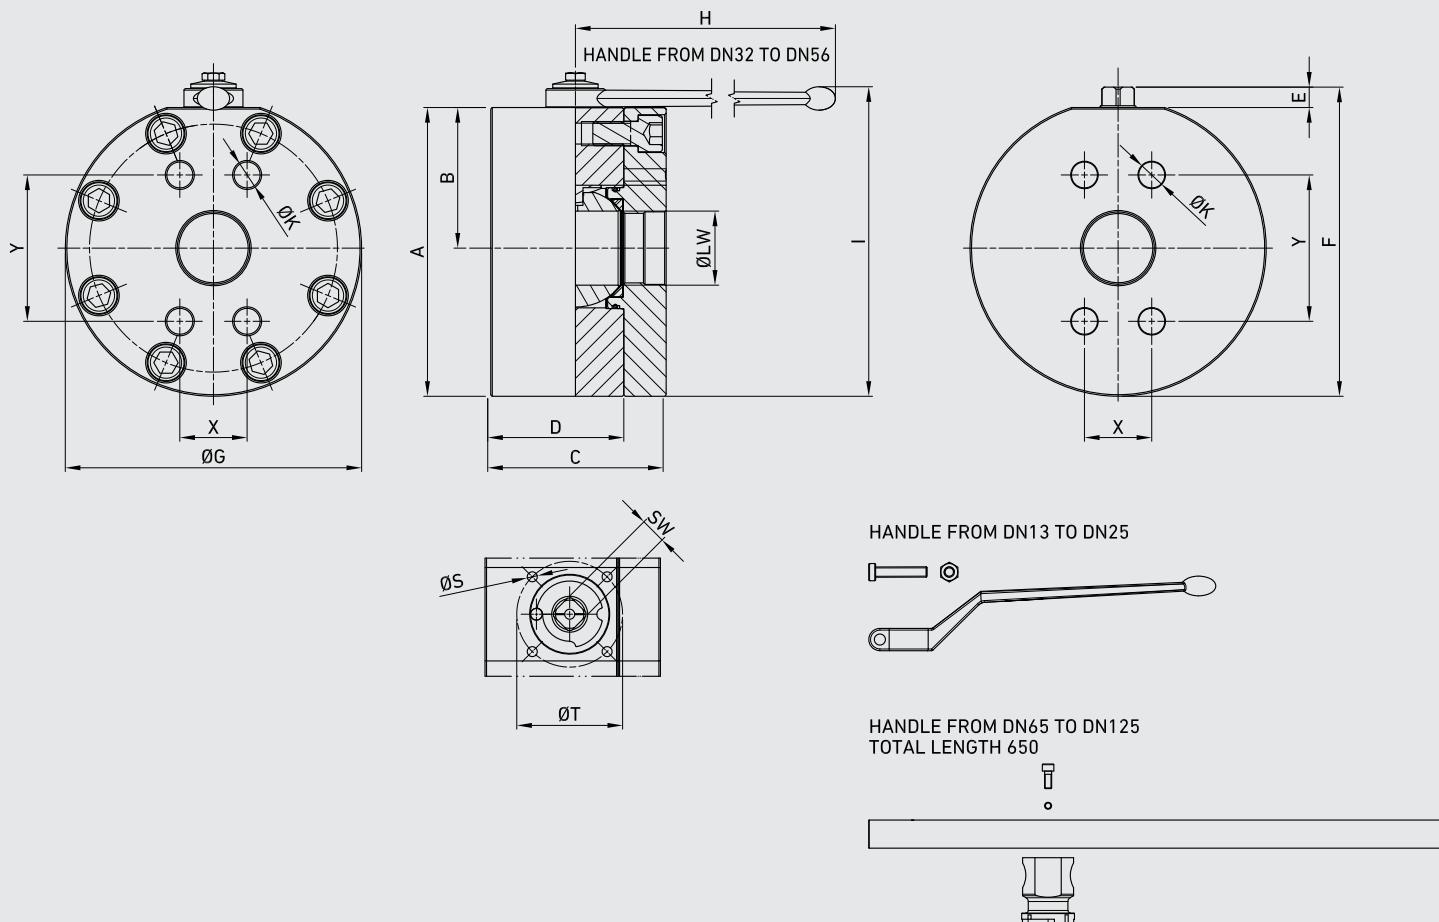


## GRS SAE J518 S3000

TYPE	DN	PN	A	B	C	D	E	F	ØG	H	I	ØK	ØT	ØS	X	Y	ISO5211	SW	ØLW	WEIGHT	ITEM CODE	
																					CS	SS
GRS3	13	MPa 21 Psi 3045	mm 67 inch 2,64	28 1,10	75 2,95	58 2,28	11 0,43	78,3 3,08	78 3,07	110 4,33	121 4,76	M8 1,42	36 M5	17,5 0,69	38,1 1,50	F03 F05	9 14	13 20	kg 2,405 lb 5,30	GR2FFT3F022A000	GR2FFT3F044A000	
GRS3	20	MPa 21 Psi 3045	mm 85,5 inch 3,37	36,5 1,44	80 3,15	60 2,36	14 0,55	100 3,94	103 4,06	180 7,09	132 5,20	M10 1,97	50 M6	22,2 0,87	47,6 1,87	F05	14 0,55	20 0,79	kg 3,902 lb 8,60	GR2FFT4F022A000	GR2FFT4F044A000	
GRS3	25	MPa 21 Psi 3045	mm 98,5 inch 3,88	39,5 1,56	88 3,46	69 2,72	14 0,55	113 4,45	118 4,65	180 7,09	142 5,59	M10 1,97	50 M6	26,2 1,03	52,4 2,06	F05	14 0,55	25 0,98	kg 6,317 lb 13,93	GR2FFT5F022A000	GR2FFT5F044A000	
GRS3	32	MPa 21 Psi 3045	mm 143,5 inch 5,65	70,9 2,79	100 3,94	73 2,87	14 0,55	162 6,38	145 5,71	300 11,81	163 6,42	M10 1,97	50 M6	30,2 1,19	58,7 2,31	F05	17 0,67	32 1,26	kg 12,228 lb 26,96	GR2FFT6F02PA000	GR2FFT6F04NA000	
GRS3	40	MPa 21 Psi 3045	mm 160 inch 6,30	78 3,07	110 4,33	80 3,15	14 0,55	178,5 7,03	165 6,50	300 11,81	180 7,09	M12 1,97	50 M6	35,7 1,41	69,8 2,75	F05	17 0,67	38 1,50	kg 16,867 lb 37,19	GR2FFT7F02PA000	GR2FFT7F04NA000	
GRS3	50	MPa 21 Psi 3045	mm 192 inch 7,56	93 3,66	116 4,57	90 3,54	14 0,55	205,5 8,09	196 7,72	300 11,81	205 8,07	M12 2,76	70 M8	42,9 1,69	77,8 3,06	F07	17 0,67	48 1,89	kg 25,606 lb 56,45	GR2FFT8F02PA000	GR2FFT8F04NA000	
GRS3	65	MPa 17,5 Psi 2537,5	mm 198 inch 7,80	93 3,66	150 5,91	107 4,21	20,5 0,81	212 8,35	203 7,99	600 23,6	266 10,47	M12 2,76	70 M8	50,8 2,00	88,9 3,50	F07	19 0,75	63 2,48	kg 32,717 lb 72,13	GR2FFT9F02PA000	GR2FFT9F04NA000	
GRS3	80	MPa 16 Psi 2320	mm 205 inch 8,07	100 3,94	150 5,91	107 4,21	22 0,87	227,5 8,96	210 8,27	600 23,6	277 10,91	M16 2,76	70 M8	61,9 2,44	106,4 4,19	F07	19 0,75	73 2,87	kg 36,413 lb 80,28	GR2FFTAF02PA000	GR2FFTAF04NA000	
GRS3	100	MPa 3,5 Psi 507,5	mm 251 inch 9,88	122 4,80	170 6,69	132 5,20	27 1,06	278 10,9	258 10,2	600 23,6	326 12,83	M16 4,02	102 M10	77,9 3,07	130,2 5,13	F10	24 0,94	95 3,74	kg 61,273 lb 135,08	GR2FFTBF02PA000	GR2FFTBF04NA000	
GRS3	125	MPa 3,5 Psi 507,5	mm 288 inch 11,3	140 5,51	210 8,27	160 6,30	35 1,38	322 12,7	310 12,2	600 23,6	389 15,31	M16 4,92	125 M12	92,1 3,63	152,4 6,00	F12	36 1,42	115 4,53	kg 98,048 lb 216,16	GR2FFTCF02PA000	GR2FFTCF04NA000	

## GRS SAE J518 S3000 UNC

TYPE	DN	PN	A	B	C	D	E	F	ØG	H	I	ØK	ØT	ØS	X	Y	ISO5211	SW	ØLW	WEIGHT	ITEM CODE											
			mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	kg	lb	CS	SS										
GRS3	13	MPa 21	mm 67	inch 2,64	28	1,10	75	2,95	58	2,28	11	0,43	78,3	3,08	78	3,07	110	4,33	121	4,76	5/16	36	M5	17,5 0,69	38,1 1,50	F03	9 0,35	13 0,51	kg 2,405	lb 5,30	GR2FUT3F022A000	GR2FUT3F044A000
		Psi 3045																														
GRS3	20	MPa 21	mm 85,5	inch 3,37	36,5	1,44	80	3,15	60	2,36	14	0,55	100	3,94	103	4,06	180	5,20	132	5,59	3/8	50	M6	22,2 0,87	47,6 1,87	F05	14 0,55	20 0,79	kg 3,902	lb 8,60	GR2FUT4F022A000	GR2FUT4F044A000
		Psi 3045																														
GRS3	25	MPa 21	mm 98,5	inch 3,88	39,5	1,56	88	3,46	69	2,72	14	0,55	113	4,45	118	4,65	180	5,59	142	5,97	3/8	50	M6	26,2 1,03	52,4 2,06	F05	14 0,55	25 0,98	kg 6,317	lb 13,93	GR2FUT5F022A000	GR2FUT5F044A000
		Psi 3045																														
GRS3	32	MPa 21	mm 143,5	inch 5,65	70,9	2,79	100	3,94	73	2,87	14	0,55	162	6,38	145	5,71	300	11,8	163	6,42	7/16	50	M6	30,2 1,19	58,7 2,31	F05	17 0,67	32 1,26	kg 12,228	lb 26,96	GR2FUT6F02PA000	GR2FUT6F04NA000
		Psi 3045																														
GRS3	40	MPa 21	mm 160	inch 6,30	78	3,07	110	4,33	80	3,15	14	0,55	178,5	7,03	165	6,50	300	11,8	180	7,09	1/2	50	M6	35,7 1,41	69,8 2,75	F05	17 0,67	38 1,50	kg 16,867	lb 37,19	GR2FUT7F02PA000	GR2FUT7F04NA000
		Psi 3045																														
GRS3	50	MPa 21	mm 192	inch 7,56	93	3,66	116	4,57	90	3,54	14	0,55	205,5	8,09	196	7,72	300	11,8	205	8,07	1/2	70	M8	42,9 1,69	77,8 3,06	F07	17 0,67	48 1,89	kg 25,606	lb 56,45	GR2FUT8F02PA000	GR2FUT8F04NA000
		Psi 3045																														
GRS3	65	MPa 17,5	mm 198	inch 7,80	93	3,66	150	5,91	107	4,21	20,5	0,81	212	8,35	203	7,99	600	23,2	266	10,47	1/2	70	M8	50,8 2,00	88,9 3,50	F07	19 0,75	63 2,48	kg 32,717	lb 72,13	GR2FUT9F02PA000	GR2FUT9F04NA000
		Psi 2537,5																														
GRS3	80	MPa 16	mm 205	inch 8,07	100	3,94	150	5,91	107	4,21	22	0,87	227,5	8,96	210	8,27	600	23,6	277	10,91	5/8	70	M8	61,9 2,44	106,4 4,19	F07	19 0,75	73 2,87	kg 36,413	lb 80,28	GR2FUTAF02PA000	GR2FUTAF04NA000
		Psi 2320																														
GRS3	100	MPa 3,5	mm 251	inch 9,88	122	4,80	170	6,69	132	5,20	27	1,06	278	10,9	258	10,2	600	23,6	326	12,83	5/8	102	M10	77,9 3,07	130,2 5,13	F10	24 0,94	95 3,74	kg 61,273	lb 135,08	GR2FUTBF02PA000	GR2FUTBF04NA000
		Psi 507,5																														
GRS3	125	MPa 3,5	mm 288	inch 11,4	140	5,51	210	5,82	160	6,30	35	1,38	322	12,6	310	15,31	600	23,6	389	4,92	5/8	125	M12	92,1 3,63	152,4 6,00	F12	36 1,42	115 4,53	kg 98,048	lb 216,16	GR2FUTCF02PA000	GR2FUTCF04NA000
		Psi 507,5																														

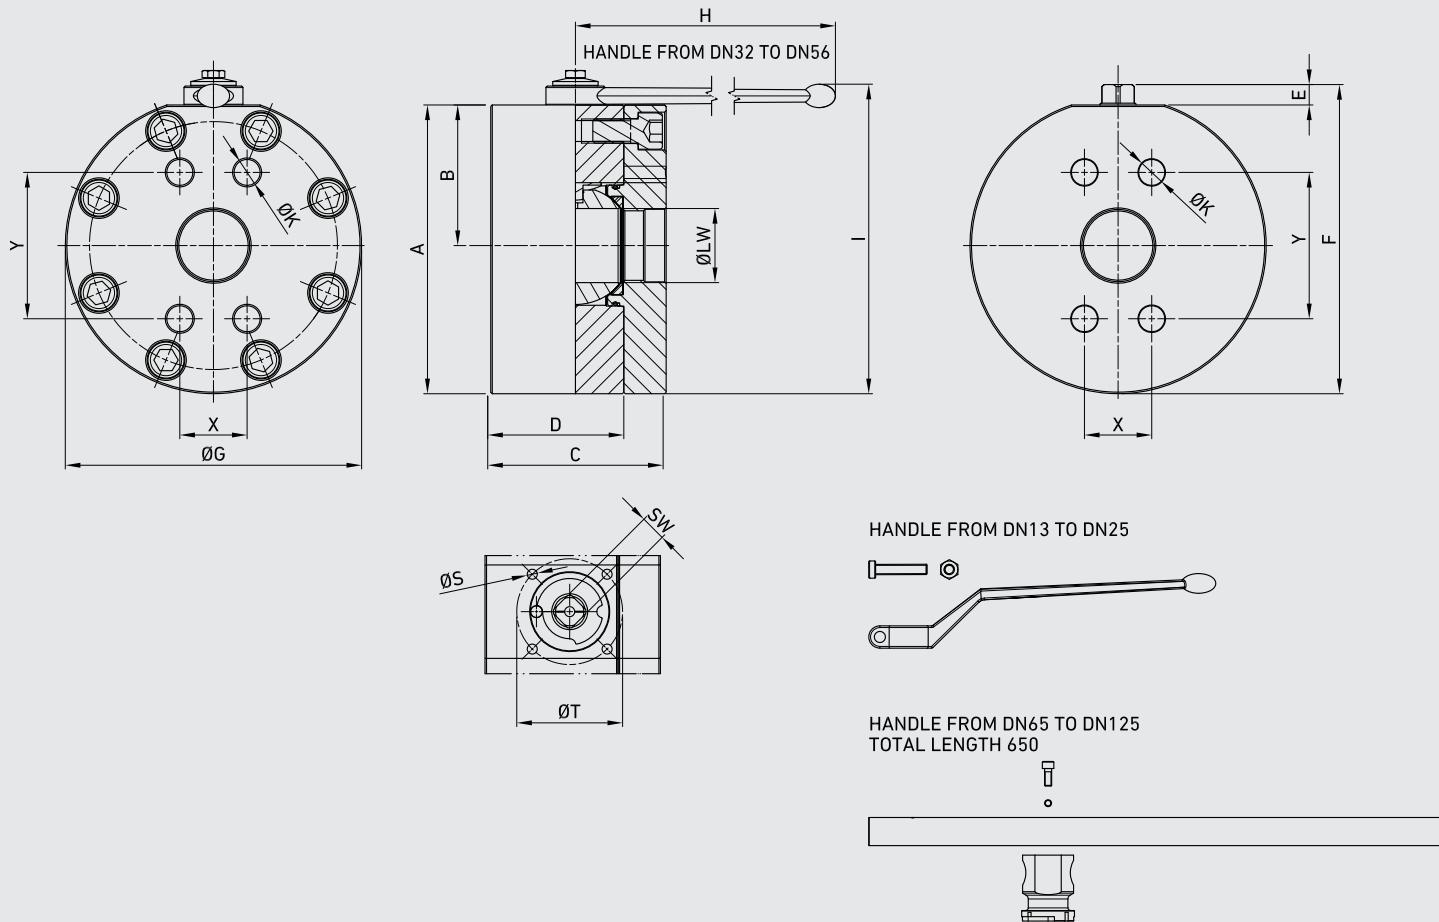

## ■ GRS SAE J518 S6000

**CS** Carbon Steel    **SS** Stainless Steel

TYPE	DN	PN	A	B	C	D	E	F	ØG	H	I	ØK	ØT	ØS	X	Y	ISO5211	SW	ØLW	WEIGHT	ITEM CODE
GRS6	13	MPa 42 Psi 6090	mm 67 inch 2,64	28 1,10	75 2,95	58 2,28	11 0,43	78,3 3,08	78 3,07	110 4,33	121 4,76	M8 1,42	36 M5	18,2 0,72	40,5 1,59	F03 F05	9 0,35	13 0,51	kg 2,405 lb 5,30	GR2FFT3G022A000 GR2FFT3G044A000	
GRS6	20	MPa 42 Psi 6090	mm 85,5 inch 3,37	36,5 1,44	80 3,15	60 2,36	14 0,55	100 3,94	103 4,06	180 7,09	132 5,20	M10 1,97	50 M6	23,8 0,94	50,8 2,00	F05	14 0,55	20 0,79	kg 3,902 lb 8,60	GR2FFT4G022A000 GR2FFT4G044A000	
GRS6	25	MPa 42 Psi 6090	mm 98,5 inch 3,88	39,5 1,56	88 3,46	69 2,72	14 0,55	113 4,45	118 4,65	180 7,09	142 5,59	M12 1,97	50 M6	27,8 1,09	57,2 2,25	F05	14 0,55	25 0,98	kg 6,317 lb 13,93	GR2FFT5G022A000 GR2FFT5G044A000	
GRS6	32	MPa 42 Psi 6090	mm 143,5 inch 5,65	70,9 2,79	100 3,94	73 2,87	14 0,55	162 6,38	145 5,71	300 11,8	163 6,42	M12 1,97	50 M6	31,8 1,25	66,7 2,63	F05	17 0,67	32 1,26	kg 12,228 lb 26,96	GR2FFT6G02PA000 GR2FFT6G04NA000	
GRS6	40	MPa 42 Psi 6090	mm 160 inch 6,30	78 3,07	110 4,33	80 3,15	14 0,55	178,5 7,03	165 6,50	300 11,8	180 7,09	M16 1,97	50 M6	36,5 1,44	79,4 3,13	F05	17 0,67	38 1,50	kg 16,867 lb 37,19	GR2FFT7G02PA000 GR2FFT7G04NA000	
GRS6	50	MPa 42 Psi 6090	mm 192 inch 7,56	93 3,66	116 4,57	90 3,54	14 0,55	205,5 8,09	196 7,72	300 11,8	205 8,07	M20 2,76	70 M8	44,5 1,75	96,8 3,81	F07	17 0,67	48 1,89	kg 25,606 lb 56,45	GR2FFT8G02PA000 GR2FFT8G04NA000	

## GRS SAE J518 S6000 UNC

TYPE	DN	PN	A	B	C	D	E	F	ØG	H	I	ØK	ØT	ØS	X	Y	ISO5211	SW	ØLW	WEIGHT	ITEM CODE										
			mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	kg	lb	CS	SS									
GRS6	13	MPa 42	mm 67	inch 2,64	28	1,10	75	2,95	58	2,28	11	0,43	78,3	3,08	78	3,07	110	4,33	121	4,76	5/16	1,42	Carbon Steel	Stainless Steel							
		Psi 6090															M5	18,2	40,5	F03	9	13	kg 2,405	GR2FUT3G022A000	GR2FUT3G044A000						
GRS6	20	MPa 42	mm 85,5	inch 3,37	36,5	1,44	80	3,15	60	2,36	14	0,55	100	3,94	103	4,06	180	5,20	132	5,00	3/8	1,97	M6	23,8	50,8	F05	14	20	kg 3,902	GR2FUT4G022A000	GR2FUT4G044A000
		Psi 6090																0,94	2,00		0,55	0,79	lb 8,60								
GRS6	25	MPa 42	mm 98,5	inch 3,88	39,5	1,56	88	3,46	69	2,72	14	0,55	113	4,45	118	4,65	180	5,09	152	5,98	7/16	1,97	M6	27,8	57,2	F05	14	25	kg 6,317	GR2FUT5G022A000	GR2FUT5G044A000
		Psi 6090																1,09	2,25		0,55	0,98	lb 13,93								
GRS6	32	MPa 42	mm 143,5	inch 5,65	70,9	2,79	100	3,94	73	2,87	14	0,55	162	6,38	145	5,71	300	11,81	163	6,42	1/2	1,97	M6	31,8	66,7	F05	17	32	kg 12,228	GR2FUT6G02PA000	GR2FUT6G04NA000
		Psi 6090																1,25	2,63		0,67	1,26	lb 26,96								
GRS6	40	MPa 42	mm 160	inch 6,30	78	3,07	110	4,33	80	3,15	14	0,55	178,5	7,03	165	6,50	300	11,81	180	7,09	5/8	1,97	M6	36,5	79,4	F05	17	38	kg 16,867	GR2FUT7G02PA000	GR2FUT7G04NA000
		Psi 6090																1,44	3,13		0,67	1,50	lb 37,19								
GRS6	50	MPa 42	mm 192	inch 7,56	93	3,66	116	4,57	90	3,54	14	0,55	205,5	8,09	196	7,72	300	11,81	205	8,07	3/4	2,76	M8	44,5	96,8	F07	17	48	kg 25,606	GR2FUT8G02PA000	GR2FUT8G04NA000
		Psi 6090																1,75	3,81		0,67	1,89	lb 56,45								



# GHP

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0


### CS Carbon Steel

- Type: ball valve 2 way
- Sizes: from DN13 up to DN100
- Ends: BSP-NPT
- Pressure: up to PN370
- Temp range: from -20°C to +100°C

### SS Stainless Steel

- Type: ball valve 2 way
- Sizes: from DN13 up to DN100
- Ends: BSP-NPT
- Pressure: up to PN370
- Temp range: from -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

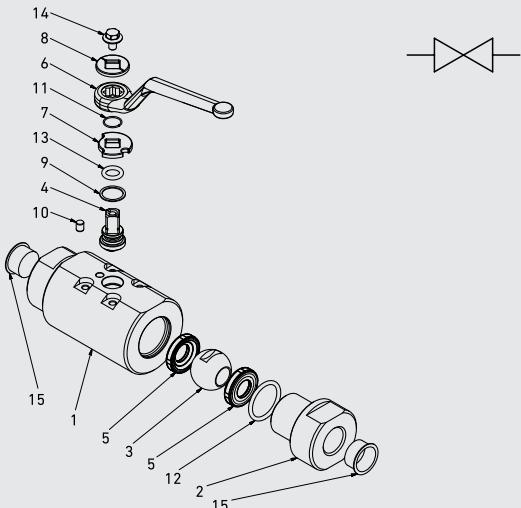

POS	DESCRIPTION	Q.TY	CS	SS	
			Carbon Steel	MATERIAL	Stainless Steel
1	Body	1		1,0570	1,4404
2	Adapter	1		1,0570	1,4404
3	Ball	1		1,4404	1,4404
4	Stem	1		1,4404	1,4404
5	Ball seat	2		POM	POM
6	Handle	1		ZINC	ZINC
7	Washer	1		1,0116	1,4301
8	Washer	1		1,0116	1,4301
9	Stem ring	1		POM	POM
10	Pin	1		1,0737	1,4301
11	Seeger	1		1,4301	1,4301
12	Adapter o-ring	1		NBR	NBR
13	Stem o-ring	1		NBR	NBR
14	Screw	1	Din 6921 8.8		Din 6921 A2
15	Caps	2		PVC	PVC



## CODE DESCRIPTION STRUCTURE

**GHP | G1 1/2 | DN13 | 2 | 2 | 4 | 4 | A | B**

Type and way of valve \_\_\_\_\_

GHP 2-way

Ends \_\_\_\_\_

GAS DIN/ NPT ANSI

ISO 228 /ASME

BSP B1.20.1

G 1/2 N 1/2

G 3/4 N 3/4

G 1 N 1

G 1 1/4 N 1 1/4

G 1 1/2 N 1 1/2

G 2 N 2

G 2 1/2 N 2 1/2

G 3 N 3

G 4 N 4

Size \_\_\_\_\_

from DN13 to DN100

Body Material \_\_\_\_\_

● 2 = 1,0570

● 4 = 1,4404

Adapter material \_\_\_\_\_

● 2 = 1,0570

● 4 = 1,4404

Stem material \_\_\_\_\_

● 4 = 1,4404 M = 1,4542

● 4 = 1,4404 M = 1,4542

Ball Material \_\_\_\_\_

● 4 = 1,4404

● 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*



Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*


\*On request

- Reduced bore
- Special threads
- Pressure class up to PN42 MPa
- Pneumatic and electrical actuator
- Security block
- Locking device




For further special requests please consult our technical/commercial service.

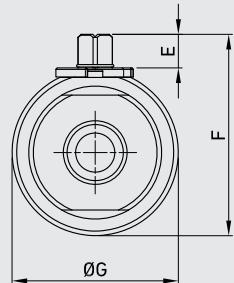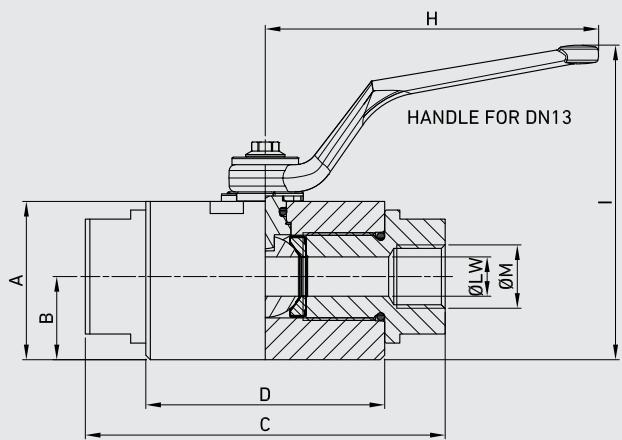

HANDLE FROM DN20 TO DN25



HANDLE FROM DN32 TO DN50

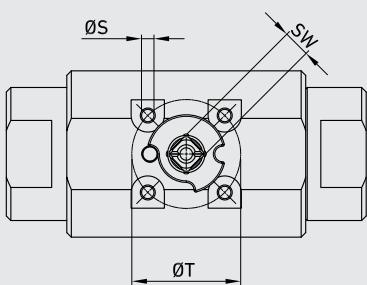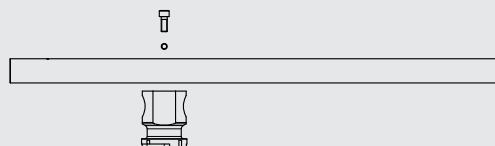HANDLE FROM DN65 TO DN100  
TOTAL LENGTH 650**GHP DIN/ISO 228 BSP**

TYPE	DN	PN		A	B	C	D	E	F	ØG	H	I	ØM	ØS	ØT	ISO5211	SW	ØLW	WEIGHT	ITEM CODE	
																				CS Carbon Steel	SS Stainless Steel
GHP G 1/2	13	MPa 37	mm 53 27,5 119 79 11 66,5 55 110 102,5 G 36	inch 2,09 1,08 4,69 3,11 0,43 2,62 2,17 4,33 4,04 1/2 M5 1,42															GH2GGT3H024A000	GH2GGT3H044A000	
		Psi 5365	inch 2,09 1,08 4,69 3,11 0,43 2,62 2,17 4,33 4,04 1/2 M5 1,42																		
GHP G 3/4	20	MPa 37	mm 70 38,5 149 99 14 88,6 77 180 118 G 50	inch 2,76 1,52 5,87 3,90 0,55 3,49 3,03 7,09 4,65 3/4 M6 1,97															GH2GGT4H024A000	GH2GGT4H044A000	
		Psi 5365	inch 2,76 1,52 5,87 3,90 0,55 3,49 3,03 7,09 4,65 3/4 M6 1,97																		
GHP G 1 25	25	MPa 37	mm 80,5 45 168 105 14 99 90 180 129 G 1 M6 50	inch 3,17 1,77 6,61 4,13 0,55 3,90 3,54 7,09 5,08 1/2 M5 1,97															GH2GGT5H024A000	GH2GGT5H044A000	
		Psi 5365	inch 3,17 1,77 6,61 4,13 0,55 3,90 3,54 7,09 5,08 1/2 M5 1,97																		
GHP G 1 1/4	32	MPa 37	mm 95 48,5 156 106 14 113 97 300 112 G 1 M6 50	inch 3,74 1,91 6,14 4,17 0,55 4,45 3,82 11,81 4,41 1/4 M6 1,97															GH2GGT6H024A000	GH2GGT6H044A000	
		Psi 5365	inch 3,74 1,91 6,14 4,17 0,55 4,45 3,82 11,81 4,41 1/4 M6 1,97																		
GHP G 1 1/2	40	MPa 37	mm 111,5 58 166,5 110,5 14 130 116 300 128 G 1 M6 50	inch 4,39 2,28 6,56 4,35 0,55 5,12 4,57 11,81 5,04 1/2 M6 1,97															GH2GGT7H024A000	GH2GGT7H044A000	
		Psi 5365	inch 4,39 2,28 6,56 4,35 0,55 5,12 4,57 11,81 5,04 1/2 M6 1,97																		
GHP G 2	50	MPa 37	mm 118,5 61,5 175 115 14 137 123 300 137 G 2 M6 50	inch 4,67 2,42 6,89 4,53 0,55 5,39 4,84 11,81 5,39 1/2 M6 1,97															GH2GGT8H024A000	GH2GGT8H044A000	
		Psi 5365	inch 4,67 2,42 6,89 4,53 0,55 5,39 4,84 11,81 5,39 1/2 M6 1,97																		
GHP G 2 1/2	65	MPa 37	mm 184,5 93,5 211,5 131,5 30,5 223,5 187 600 280 G 2 M10 102	inch 7,26 3,68 8,33 5,18 1,20 8,80 7,36 23,62 11,02 1/2 M10 4,02															GH2GGT9H02NA000	GH2GGT9H04NA000	
		Psi 5365	inch 7,26 3,68 8,33 5,18 1,20 8,80 7,36 23,62 11,02 1/2 M10 4,02																		
GHP G 3	80	MPa 37	mm 200 102 239 162,5 30,5 239 204 600 294 G 3 M10 102	inch 7,87 4,02 9,41 6,40 1,20 9,41 8,03 23,62 11,57 4,02															GH2GGTAH02NA000	GH2GGTAH04NA000	
		Psi 5365	inch 7,87 4,02 9,41 6,40 1,20 9,41 8,03 23,62 11,57 4,02																		
GHP G 4	100	MPa 37	mm 236 120 295,5 218 31 268,5 240 450 316,5 G 4 M10 102	inch 9,29 4,72 11,63 8,58 1,22 10,57 9,45 17,72 12,46 4,02															GH2GGTBH02NA000	GH2GGTBH04NA000	
		Psi 5365	inch 9,29 4,72 11,63 8,58 1,22 10,57 9,45 17,72 12,46 4,02																		

**GHP ANSI-ASME B1.20.1 NPT**

TYPE	DN	PN	A	B	C	D	E	F	ØG	H	I	ØM	ØS	ØT	ISO5211	SW	ØLW	WEIGHT	ITEM CODE	
			mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	lb	kg	lb	kg	lb
GHP N 1/2	13	MPa 37	53	27,5	119	79	11	66,5	55	110	102,5	N	M5	36	F03	9	13	1,81	GH2NNT3H024A000	GH2NNT3H044A000
		Psi 5365	inch 2,09	1,08	4,69	3,11	0,43	2,62	2,17	4,33	4,04	1/2	1,42	0,35	0,51	lb	3,99			
GHP N 3/4	20	MPa 37	70	38,5	149	99	14	88,6	77	180	118	N	M6	50	F05	14	20	kg 4,378	GH2NNT4H024A000	GH2NNT4H044A000
		Psi 5365	inch 2,76	1,52	5,87	3,90	0,55	3,49	3,03	7,09	4,65	3/4	1,97	0,55	0,79	lb	9,65			
GHP N 1	25	MPa 37	80,5	45	168	105	14	99	90	180	129	N 1	M6	50	F05	14	25	kg 6,219	GH2NNT5H024A000	GH2NNT5H044A000
		Psi 5365	inch 3,17	1,77	6,61	4,13	0,55	3,90	3,54	7,09	5,08	1,97	1,97	0,55	0,98	lb	13,71			
GHP N 1 1/4	32	MPa 37	95	48,5	156	106	14	113	97	300	112	N 1	M6	50	F05	17	32	kg 6,74	GH2NNT6H024A000	GH2NNT6H044A000
		Psi 5365	inch 3,74	1,91	6,14	4,17	0,55	4,45	3,82	11,81	4,41	1/4	1,97	0,67	1,26	lb	14,86			
GHP N 1 1/2	40	MPa 37	111,5	58	166,5	110,5	14	130	116	300	128	N 1	M6	50	F05	17	40	kg 10	GH2NNT7H024A000	GH2NNT7H044A000
		Psi 5365	inch 4,39	2,28	6,56	4,35	0,55	5,12	4,57	11,81	5,04	1/2	1,97	0,67	1,57	lb	22,05			
GHP N 2	50	MPa 37	118,5	61,5	175	115	14	137	123	300	137	N 2	M6	50	F05	17	49	kg 11,169	GH2NNT8H024A000	GH2NNT8H044A000
		Psi 5365	inch 4,67	2,42	6,89	4,53	0,55	5,39	4,84	11,81	5,39	1,97	1,97	0,67	1,93	lb	24,62			
GHP N 2 1/2	65	MPa 37	184,5	93,5	211,5	131,5	30,5	223,5	187	600	280	N 2	M10	102	F10	24	63	kg 36,5	GH2NNT9H02NA000	GH2NNT9H04NA000
		Psi 5365	inch 7,26	3,68	8,33	5,18	1,20	8,80	7,36	23,62	11,02	1/2	4,02	0,94	2,48	lb	80,47			
GHP N 3	80	MPa 37	200	102	239	162,5	30,5	239	204	600	294	N 3	M10	102	F10	24	74	kg 46,5	GH2NNTAH02NA000	GH2NNTAH04NA000
		Psi 5365	inch 7,87	4,02	9,41	6,40	1,20	9,41	8,03	23,62	11,57	4,02	4,02	0,94	2,91	lb	102,51			
GHP N 4	100	MPa 37	236	120	295,5	218	31	268,5	240	450	316,5	N 4	M10	102	F10	24	95	kg 77	GH2NNTBH02NA000	GH2NNTBH04NA000
		Psi 5365	inch 9,29	4,72	11,63	8,58	1,22	10,57	9,45	17,72	12,46	4,02	4,02	0,94	3,74	lb	169,76			



# RF


## FLOW CONTROL

Edition. 21.0

### CS Carbon Steel

- Type: check valve flow control
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT
- Pressure: up to PN400
- Temp range: from -20°C to +100°C

### STANDARD COMPOSITION OF VALVE

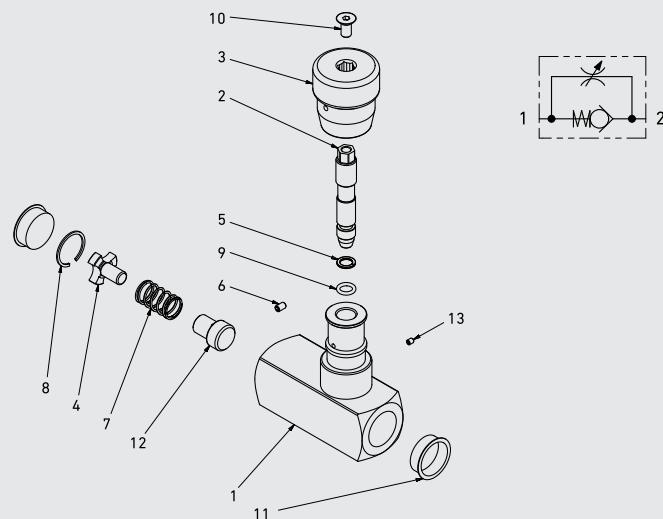

**CS**  
Carbon Steel

POS	DESCRIPTION	Q.TY	MATERIAL
1	Body	1	1,0737
2	Stem	1	1,0503
3	Handle	1	ALLUMINUM
4	Spring ring	1	X 35 Cr Mo 17
5	Stem ring	1	PTFE
6	Pin	1	1,0737
7	Spring	1	1,0116
8	Seeger	1	X 35 Cr Mo 17
9	Stem o-ring	1	NBR
10	Screw	1	DIN 7991 8.8
11	Caps	2	PVC
12	Poppet	1	1,0737
13	Screw	1	DIN 7991 8.8



**CRACKING PRESSURE  
0,50 bar**

## CODE DESCRIPTION STRUCTURE

**RF      G1/2      CS**

Type and way of valve \_\_\_\_\_

RF flow control

Ends \_\_\_\_\_

GAS DIN/ NPT ANSI

ISO 228 /ASME

BSP B1.20.1

G 1/4 N 1/4

G 3/8 N 3/8

G 1/2 N 1/2

G 3/4 N 3/4

G 1 N 1


Material \_\_\_\_\_

CS carbon steel

\*On request

- Special threads
- Pressure class PN 350

For further special requests please consult our technical/commercial service.

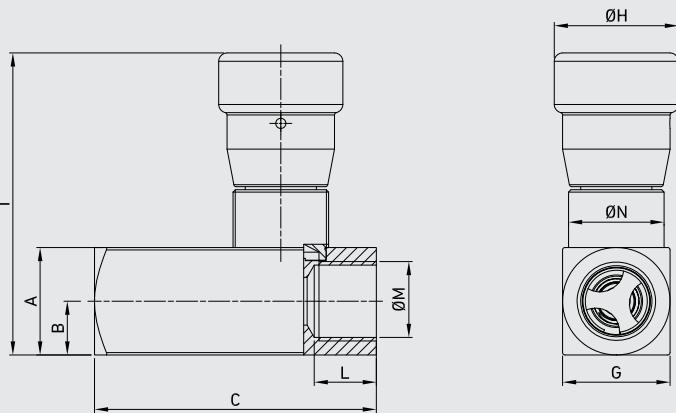

## I RF DIN/ISO 228 BSP

CS



Carbon Steel

TYPE	DN	PN	MAX FLOW L/m	CRACKING PRESSURE	A	B	C	G	ØH	I	ØM	ØN	WEIGHT	ITEM CODE
RF G 1/4	6	MPa 40	15	MPa 0,05	mm 25	12,5	66	25	33	75	G 1/4	M20X1	kg 0,41	GF2GGT130110000
		Psi 5800		Psi 7,25	inch 0,98	0,49	2,60	0,98	1,30	2,95			lb 0,90	
RF G 3/8	10	MPa 40	30	MPa 0,05	mm 25	12,5	77	25	33	75	G 3/8	M20X1	kg 0,42	GF2GGT230110000
		Psi 5800		Psi 7,25	inch 0,98	0,49	3,03	0,98	1,30	2,95			lb 0,93	
RF G 1/2	13	MPa 40	50	MPa 0,05	mm 30	15	91	30	33	81	G 1/2	M25X1,5	kg 0,63	GF2GGT330110000
		Psi 5800		Psi 7,25	inch 1,18	0,59	3,58	1,18	1,30	3,19			lb 1,39	
RF G 3/4	20	MPa 40	80	MPa 0,05	mm 40	20	112,5	40	42	110	G 3/4	M25X1,5	kg 1,52	GF2GGT430110000
		Psi 5800		Psi 7,25	inch 1,57	0,79	4,43	1,57	1,65	4,33			lb 3,35	
RF G 1	25	MPa 40	150	MPa 0,05	mm 45	22,5	141	45	42	115	G 1	M35X1,5	kg 2,1	GF2GGT530110000
		Psi 5800		Psi 7,25	inch 1,77	0,89	5,55	1,77	1,65	4,53			lb 4,63	

## RF ANSI/ASME B1.20.1 NPT

TYPE	DN	PN	MAX FLOW L/m	CRACKING PRESSURE	A		B	C	G	ØH	I	ØM	ØN	WEIGHT	ITEM CODE	
					MPa	0,05	mm	25	12,5	66	25	33	75	N 1/4	M20X1	
RF N 1/4	6	MPa 40	15	MPa 0,05	mm 25	12,5	66	25	33	75	N 1/4	M20X1	kg 0,41	GF2NNT130110000	lb 0,90	
		Psi 5800		Psi 7,25	inch 0,98	0,49	2,60	0,98	1,30	2,95			kg 0,42		lb 0,93	
RF N 3/8	10	MPa 40	30	MPa 0,05	mm 25	12,5	77	25	33	75	N 3/8	M20X1	kg 0,42	GF2NNT230110000	lb 0,93	
		Psi 5800		Psi 7,25	inch 0,98	0,49	3,03	0,98	1,30	2,95			kg 0,42		lb 0,93	
RF N 1/2	13	MPa 40	50	MPa 0,05	mm 30	15	91	30	33	81	N 1/2	M25X1.5	kg 0,63	GF2NNT330110000	lb 1,39	
		Psi 5800		Psi 7,25	inch 1,18	0,59	3,58	1,18	1,30	3,19			kg 0,63		lb 1,39	
RF N 3/4	20	MPa 40	80	MPa 0,05	mm 40	20	112,5	40	42	110	N 3/4	M25X1.5	kg 1,52	GF2NNT430110000	lb 3,35	
		Psi 5800		Psi 7,25	inch 1,57	0,79	4,43	1,57	1,65	4,33			kg 1,52		lb 3,35	
RF N 1	25	MPa 40	150	MPa 0,05	mm 45	22,5	141	45	42	115	N 1	M35X1.5	kg 2,1	GF2NNT530110000	lb 4,63	
		Psi 5800		Psi 7,25	inch 1,77	0,89	5,55	1,77	1,65	4,53			kg 2,1		lb 4,63	

## PRESSURE DROP CURVES

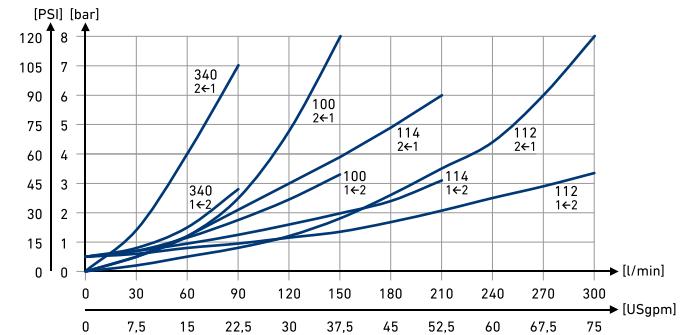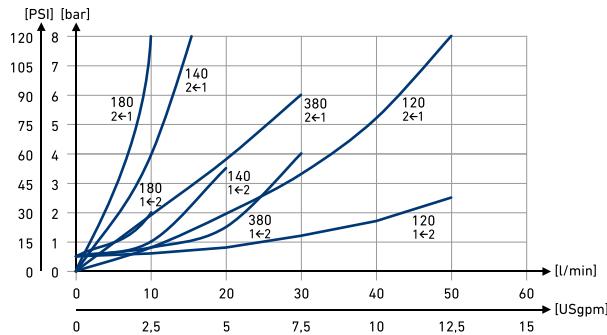



# BD


## FLOW CONTROL B-DIRECTIONAL

Edition. 21.0

### CS Carbon Steel

- Type: reduce flow control B-directional
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT
- Pressure: up to PN400
- Temp range: from -20°C to +100°C

### STANDARD COMPOSITION OF VALVE

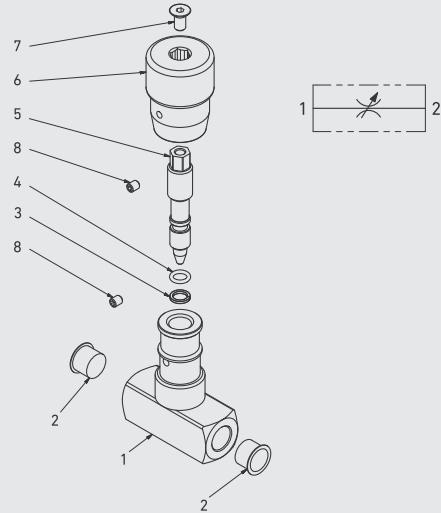

**CS**  
Carbon Steel

POS	DESCRIPTION	Q.TY	MATERIAL
1	Body	1	1,0737
2	Caps	2	PVC
3	Stem	1	1,05
4	Stem o-ring	1	NBR
5	Stem ring	1	PTFE
6	Handle	1	ALLUMINIUM
7	Screw	1	DIN 7991 8.8
8	Screw	1	DIN 7991 8.8



**CRACKING PRESSURE  
0,50 bar**

## CODE DESCRIPTION STRUCTURE

**BD    G1/2    CS**

Type and way of valve \_\_\_\_\_

BD flow control

Ends \_\_\_\_\_

GAS DIN/ NPT ANSI

ISO 228 /ASME

BSP B1.20.1

G 1/4 N 1/4

G 3/8 N 3/8

G 1/2 N 1/2

G 3/4 N 3/4

G 1 N 1


Material \_\_\_\_\_

CS carbon steel

\*On request

- Special threads
- Pressure class PN 350

For further special requests please consult our technical/commercial service.

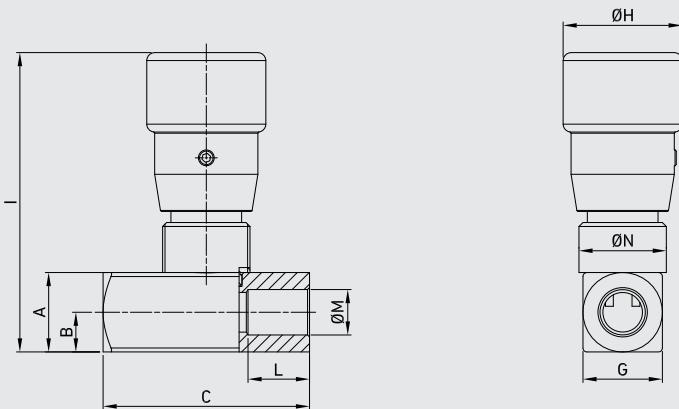

## BD DIN/ISO 228 BSP



**CS**  
Carbon Steel

TYPE	DN	PN	MAX FLOW L/m	CRACKING PRESSURE	A	B	C	G	ØH	I	ØM	ØN	WEIGHT	ITEM CODE
BD G 1/4	6	MPa 40	15	MPa 0,05	mm 25	12,5	54	25	30	75	G 1/4	M20X1	kg 0,33	GG2GGT130110000
		Psi 5800		Psi 7,25	inch 0,98	0,49	2,13	0,98	1,18	2,95			lb 0,73	
BD G 3/8	10	MPa 40	30	MPa 0,05	mm 25	12,5	54	25	30	75	G 3/8	M20X1	kg 0,31	GG2GGT230110000
		Psi 5800		Psi 7,25	inch 0,98	0,49	2,13	0,98	1,18	2,95			lb 0,68	
BD G 1/2	13	MPa 40	50	MPa 0,05	mm 30	15	64	30	33	81	G 1/2	M25X1,5	kg 0,48	GG2GGT330110000
		Psi 5800		Psi 7,25	inch 1,18	0,59	2,52	1,18	1,30	3,19			lb 1,06	
BD G 3/4	20	MPa 40	80	MPa 0,05	mm 40	20	81	40	42	110	G 3/4	M35X1,5	kg 1,13	GG2GGT430110000
		Psi 5800		Psi 7,25	inch 1,57	0,79	3,19	1,57	1,65	4,33			lb 2,49	
BD G 1	25	MPa 40	150	MPa 0,05	mm 45	22,5	102	45	42	115	G 1	M35X1,5	kg 1,5	GG2GGT530110000
		Psi 5800		Psi 7,25	inch 1,77	0,89	4,02	1,77	1,65	4,53			lb 3,31	

## BD ANSI/ASME B1.20.1 NPT

TYPE	DN	PN	MAX FLOW L/m	CRACKING PRESSURE	A	B	C	G	ØH	I	ØM	ØN	WEIGHT	ITEM CODE
					MPa	0,05	mm 25	12,5	54	25	30	75	N 1/4	M20X1
BD N 1/4	6	MPa 40	15	MPa 0,05	mm 25	12,5	54	25	30	75	N 1/4	M20X1	kg 0,33 lb 0,73	GG2NNT130110000
		Psi 5800		Psi 7,25	inch 0,98	0,49	2,13	0,98	1,18	2,95				CS Carbon Steel
BD N 3/8	10	MPa 40	30	MPa 0,05	mm 25	12,5	54	25	30	75	N 3/8	M20X1	kg 0,31 lb 0,68	GG2NNT230110000
		Psi 5800		Psi 7,25	inch 0,98	0,49	2,13	0,98	1,18	2,95				CS Carbon Steel
BD N 1/2	13	MPa 40	50	MPa 0,05	mm 30	15	64	30	33	81	N 1/2	M25X1.5	kg 0,48 lb 1,06	GG2NNT330110000
		Psi 5800		Psi 7,25	inch 1,18	0,59	2,52	1,18	1,30	3,19				CS Carbon Steel
BD N 3/4	20	MPa 40	80	MPa 0,05	mm 40	20	81	40	42	110	N 3/4	M35X1.5	kg 1,13 lb 2,49	GG2NNT430110000
		Psi 5800		Psi 7,25	inch 1,57	0,79	3,19	1,57	1,65	4,33				CS Carbon Steel
BD N 1	25	MPa 40	150	MPa 0,05	mm 45	22,5	102	45	42	115	N 1	M35X1.5	kg 1,5 lb 3,31	GG2NNT530110000
		Psi 5800		Psi 7,25	inch 1,77	0,89	4,02	1,77	1,65	4,53				CS Carbon Steel

## PRESSURE DROP CURVES

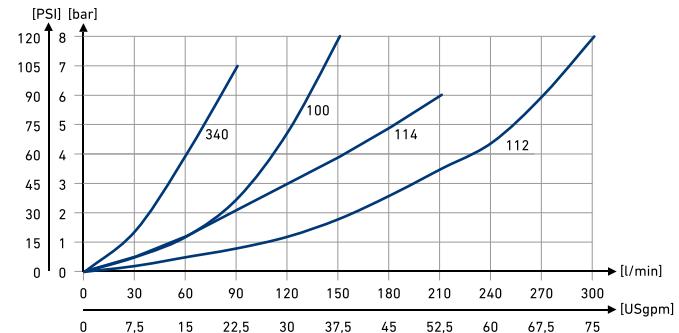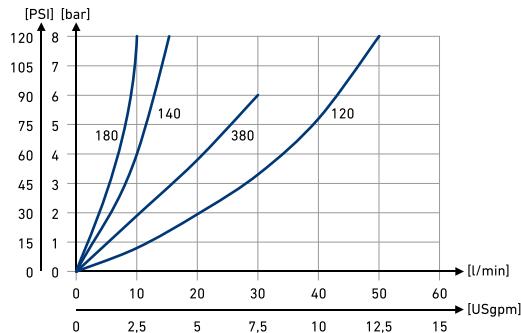



# VU

## CHECK VALVES

Edition. 21.0


### CS Carbon Steel

- Type: check valve
- Sizes: from DN6 up to DN50
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### SS Stainless Steel

- Type: check valve
- Sizes: from DN6 up to DN50
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

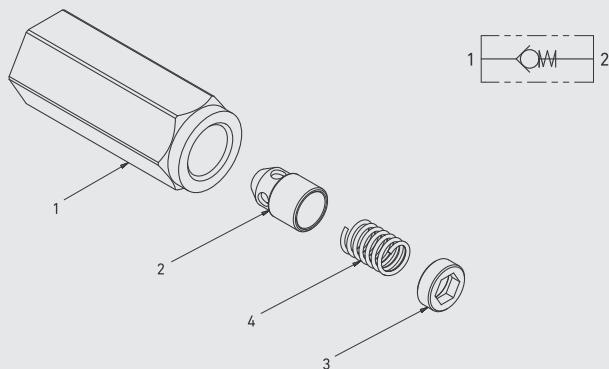

POS	DESCRIPTION	Q.TY	CS	SS
			Carbon Steel	MATERIAL
1	Body	1	1,0737	1,4404
2	Poppet	1	1,4749	1,4305
3	Ring	1	1,0737	1,4305
4	Spring	1	1,0116	1,4310



## CODE DESCRIPTION STRUCTURE

**VU    G1/2    SS**

Type and way of valve \_\_\_\_\_

VU check valves

Ends \_\_\_\_\_

GAS DIN/	NPT ANSI	SAE
ISO 228	/ASME	J1926-1
BSP	B1.20.1	
G 1/4	N 1/4	SAE4
G 3/8	N 3/8	SAE6
G 1/2	N 1/2	SAE8
G 3/4	N 3/4	SAE12
G 1	N 1	SAE16
G 1 1/4	N 1 1/4	
G 1 1/2	N 1 1/2	
G 2	N 2	


Material \_\_\_\_\_

- CS carbon steel
- SS stainless steel

\*On request

- Special threads
- Pressure class up to PN500
- Spring closed: 1BAR - 3BAR - 5BAR - 8BAR




For further special requests please consult our technical/commercial service.

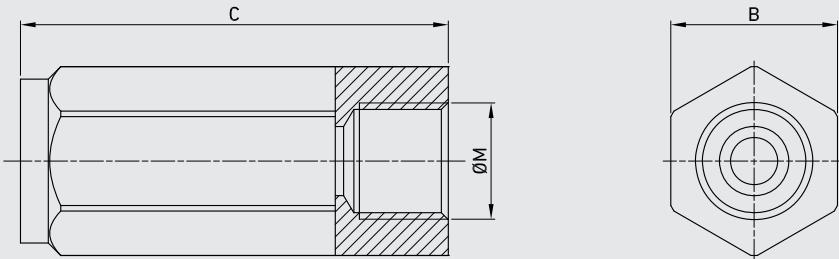

## VU DIN ISO 228 BSP GAS

TYPE	DN	PN	MAX FLOW L/m	CRACKING PRESSURE			B	C	ØM	WEIGHT	ITEM CODE	
				MPa	0,04	0,07					MPa	kg
VU G 1/4	6	MPa 50	15	MPa	0,04	0,07	mm 19	62	G 1/4	0,11	GC2GGT150110000	GC2GGT150440000
		Psi 7250		Psi	5,8	10,15	inch 2,44	2,68		lb 0,24		
VU G 3/8	10	MPa 50	30	MPa	0,04	0,07	mm 24	68	G 3/8	0,2	GC2GGT250110000	GC2GGT250440000
		Psi 7250		Psi	5,8	10,15	inch 2,68	3,03		lb 0,44		
VU G 1/2	13	MPa 50	50	MPa	0,04	0,07	mm 30	77	G 1/2	0,35	GC2GGT350110000	GC2GGT350440000
		Psi 7250		Psi	5,8	10,15	inch 3,03	3,03		lb 0,77		
VU G 3/4	20	MPa 42	90	MPa	0,04	0,07	mm 36	88	G 3/4	0,53	GC2GGT440110000	GC2GGT440440000
		Psi 6090		Psi	5,8	10,15	inch 3,46	3,46		lb 1,17		
VU G 1	25	MPa 42	150	MPa	0,04	0,07	mm 41	105	G 1	0,75	GC2GGT530110000	GC2GGT530440000
		Psi 6090		Psi	5,8	10,15	inch 4,13	4,13		lb 1,65		
VU G 1 1/4	32	MPa 35	200	MPa	0,04	0,07	mm 55	135	G 1 1/4	1,81	GC2GGT630110000	GC2GGT630440000
		Psi 5075		Psi	5,8	10,15	inch 5,31	5,31		lb 3,99		
VU G 1 1/2	40	MPa 35	300	MPa	0,04	0,07	mm 60	145	G 1 1/2	2,2	GC2GGT730110000	GC2GGT730440000
		Psi 5075		Psi	5,8	10,15	inch 5,71	5,71		lb 4,85		
VU G 2	50	MPa 35	430	MPa	0,04	0,07	mm 75	175	G 2	4,17	GC2GGT830110000	GC2GGT830440000
		Psi 5075		Psi	5,8	10,15	inch 6,89	6,89		lb 9,19		

## PRESSURE DROP CURVES

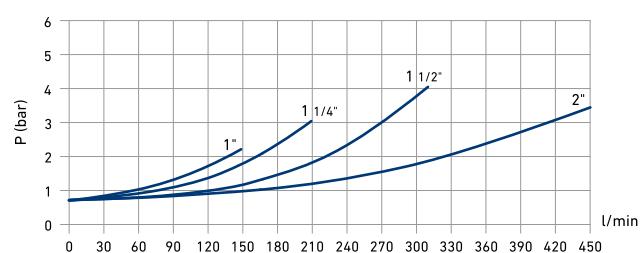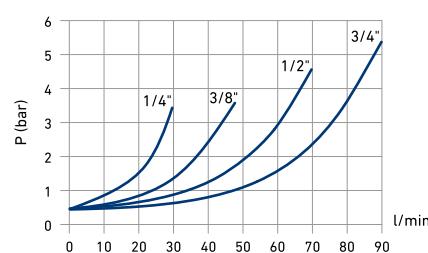

**VU ANSI/ASME B1.20.1 NPT**

TYPE	DN	PN	MAX FLOW L/m	CRACKING PRESSURE			B	C	ØM	WEIGHT	ITEM CODE	
				MPa	0,04	0,07					kg	0,11
VUN 1/4	6	MPa 50	15	MPa	0,04	0,07	mm	19	62	N 1/4	kg	0,11
		Psi 7250									lb	0,24
VUN 3/8	10	MPa 50	30	MPa	0,04	0,07	mm	24	68	N 3/8	kg	0,2
		Psi 7250									lb	0,44
VUN 1/2	13	MPa 50	50	MPa	0,04	0,07	mm	30	77	N 1/2	kg	0,35
		Psi 7250									lb	0,77
VUN 3/4	20	MPa 42	90	MPa	0,04	0,07	mm	36	88	N 3/4	kg	0,53
		Psi 6090									lb	1,17
VUN 1	25	MPa 42	150	MPa	0,04	0,07	mm	41	105	N 1	kg	0,75
		Psi 6090									lb	1,65
VUN 1 1/4	32	MPa 35	200	MPa	0,04	0,07	mm	55	135	N 1 1/4	kg	1,81
		Psi 5075									lb	3,99
VUN 1 1/2	40	MPa 35	300	MPa	0,04	0,07	mm	60	145	N 1 1/2	kg	2,2
		Psi 5075									lb	4,85
VUN 2	50	MPa 35	430	MPa	0,04	0,07	mm	75	175	N 2	kg	4,17
		Psi 5075									lb	9,19

**VU SAE J1926-1**

TYPE	DN	PN	MAX FLOW L/m	CRACKING PRESSURE			B	C	ØM	WEIGHT	ITEM CODE	
				MPa	0,04	0,07					kg	0,11
VU SAE4	6	MPa 50	15	MPa	0,04	0,07	mm	19	62	N 1/4	kg	0,11
		Psi 7250									lb	0,24
VU SAE6	10	MPa 50	30	MPa	0,04	0,07	mm	24	68	N 3/8	kg	0,2
		Psi 7250									lb	0,44
VU SAE8	13	MPa 50	50	MPa	0,04	0,07	mm	30	77	N 1/2	kg	0,35
		Psi 7250									lb	0,77
VU SAE12	20	MPa 42	90	MPa	0,04	0,07	mm	36	88	N 3/4	kg	0,53
		Psi 6090									lb	1,17
VU SAE16	25	MPa 42	150	MPa	0,04	0,07	mm	41	105	N 1	kg	0,75
		Psi 6090									lb	1,65



# GEV


## SHUTTLE VALVES

Edition. 21.0

### Carbon Steel

- Type: shuttle valve 3 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### STANDARD COMPOSITION OF VALVE

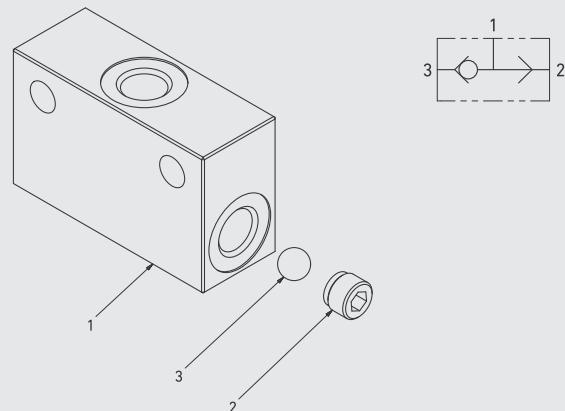

POS	DESCRIPTION	Q.TY	Carbon Steel	
			MATERIAL	
1	Body	1	1,0737	
2	Adapter	1	1,0737	
3	Ball	1	UNI3545	



## CODE DESCRIPTION STRUCTURE

**GEV | G1/2 | DN13 | 1**

Type and way of valve \_\_\_\_\_

GEV 2-way

Ends \_\_\_\_\_

GAS DIN/	NPT ANSI
ISO 228	/ASME
BSP	B1.20.1
G 1/4	N 1/4
G 3/8	N 3/8
G 1/2	N 1/2
G 3/4	N 3/4
G 1	N 1

Nominal dimension \_\_\_\_\_

DN6  
DN10  
DN13  
DN20  
DN25



Body Material \_\_\_\_\_

● 1 = 1.0737

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN25 Mpa


For further special requests please consult our technical/commercial service.

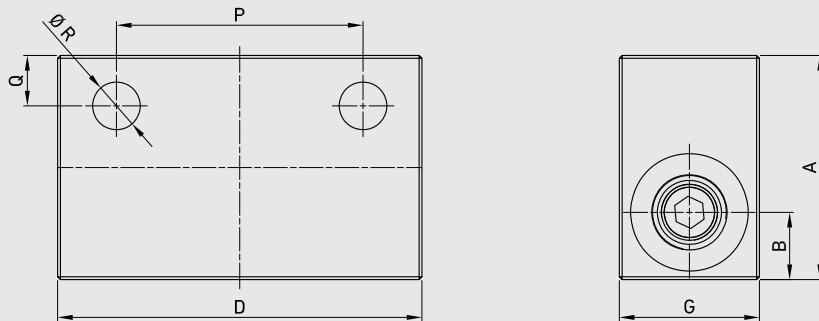

## ■ GEV DIN/ISO 228 BSP

**CS**  
Carbon Steel

TYPE	DN	PN		A	B	D	G	ØM	P	Q	ØR	ØLW	WEIGHT	ITEM CODE
GEV G 1/4	6	MPa 50	mm	40	12	65	25	G 1/4	44	9	8,5	5	kg 0,43	GEVGGT120110000
		Psi 7250	inch	1,57	0,47	2,56	0,98		1,73	0,35	0,33	0,20	lb 0,95	
GEV G 3/8	10	MPa 50	mm	40	12	65	25	G 3/8	44	9	8,5	7,5	kg 0,40	GEVGGT220110000
		Psi 7250	inch	1,57	0,47	2,56	0,98		1,73	0,35	0,33	0,30	lb 0,88	
GEV G 1/2	13	MPa 50	mm	57	18	76	30	G 1/2	44	12	8,5	11	kg 0,82	GEVGGT320110000
		Psi 7250	inch	2,24	0,71	2,99	1,18		1,73	0,47	0,33	0,43	lb 1,81	
GEV G 3/4	20	MPa 50	mm	65	22	85	40	G 3/4	44	12	8,5	15	kg 1,38	GEVGGT420110000
		Psi 7250	inch	2,56	0,87	3,35	1,57		1,73	0,47	0,33	0,59	lb 3,04	
GEV G 1	25	MPa 50	mm	65	22	95	40	G1	60	11	10,5	21	kg 1,30	GEVGGT520110000
		Psi 7250	inch	2,56	0,87	3,74	1,57		2,36	0,43	0,41	0,83	lb 2,87	



## ■ GEV ANSI/ASME B1.20.1 NPT

TYPE	DN	PN	A	B	D	G	ØM	P	Q	ØR	ØLW	WEIGHT	CS Carbon Steel	ITEM CODE
GEV N 1/4	6	MPa 50	mm 40	12	65	25	N 1/4	44	9	8,5	5	kg 0,43	GEVNNT120110000	
		Psi 7250	inch 1,57	0,47	2,56	0,98		1,73	0,35	0,33	0,20	lb 0,95		
GEV N 3/8	10	MPa 50	mm 40	12	65	25	N 3/8	44	9	8,5	7,5	kg 0,40	GEVNNT220110000	
		Psi 7250	inch 1,57	0,47	2,56	0,98		1,73	0,35	0,33	0,30	lb 0,88		
GEV N 1/2	13	MPa 50	mm 57	18	76	30	N 1/2	44	12	8,5	11	kg 0,82	GEVNNT320110000	
		Psi 7250	inch 2,24	0,71	2,99	1,18		1,73	0,47	0,33	0,43	lb 1,81		
GEV N 3/4	20	MPa 50	mm 65	22	85	40	N 3/4	44	12	8,5	15	kg 1,38	GEVNNT420110000	
		Psi 7250	inch 2,56	0,87	3,35	1,57		1,73	0,47	0,33	0,59	lb 3,04		
GEV N 1	25	MPa 50	mm 65	22	95	40	N 1	60	11	10,5	21	kg 1,30	GEVNNT520110000	
		Psi 7250	inch 2,56	0,87	3,74	1,57		2,36	0,43	0,41	0,83	lb 2,87		



# GPS



## 3 WAYS SINGLE PILOT OPERATED CHECK VALVES

Edition. 21.0

### cs Carbon Steel

- Type: 3-ways single pilot operated check valves with zincplasted steel body
- Sizes: from DN6 up to DN25
- Ends: BSP
- O-Rings: NBR
- Pressure: up to PN400
- Temp range: from -20°C to +100°C



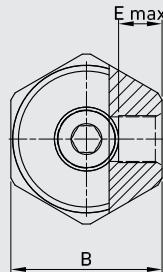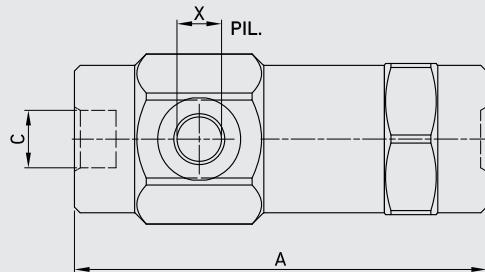

## CODE DESCRIPTION STRUCTURE

**GPS G1/4 2,5 V**

Type and way of valve

GPS

Port size

G 1/4  
G 3/8  
G 1/2  
G 3/4  
G 1

Cracking pressure

2,5  
5  
3  
0,5  
1

Seals hole



NBR

\*On request

• 8 Bar spring

## PRESSURE DROP CURVES

Oil viscosity 24 mm/sec. (3,5°E)  
Temperature 50 °C

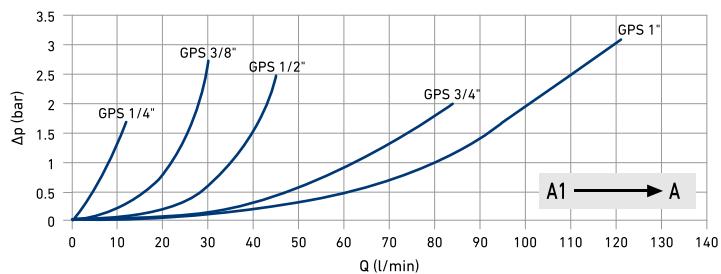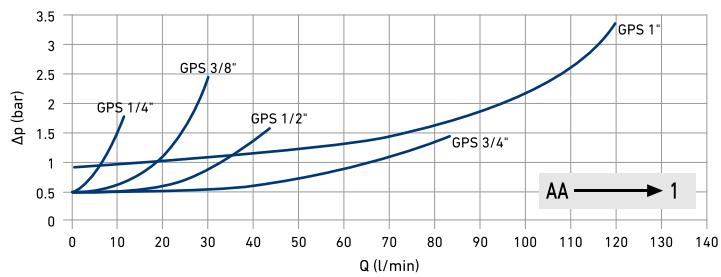

## GPS

TYPE	MAX FLOW l/min	MAX PRESSURE	CRACKING PRESSURE	A	B	E	C BSPP	X BSPP	PILOT RATIO	WEIGHT	ITEM CODE
GPS G 1/4	12	MPa 40 Psi 5800	0,25 36,25	mm 103 inch 4,06	36 1,42	11 0,43	1/4	1/4	1:9	kg 0,650 lb 1,43	G550202A01AARAA
GPS G 3/8	30	MPa 40 Psi 5800	0,5 72,5	mm 109 inch 4,29	40 1,57	11,5 0,45	3/8	1/4	1:6	kg 0,820 lb 1,81	G550203A01AARAA
GPS G 1/2	45	MPa 35 Psi 5075	0,3 43,5	mm 120 inch 4,72	42 1,65	11 0,43	1/2	1/4	1:4,5	kg 0,960 lb 2,12	G550204A01AAPAA
GPS G 3/4	85	MPa 35 Psi 5075	0,05 7,25	mm 131 inch 5,16	55 2,17	14 0,55	3/4	1/4	1:3,7	kg 1,950 lb 4,30	G550205A01AAPAA
GPS G 1	120	MPa 35 Psi 5075	0,1 14,5	mm 165 inch 6,50	55 2,17	14 0,55	1	1/4	1:3,5	kg 2,350 lb 5,18	G550206A01AAPAA

**CS**  
Carbon Steel



# VB VUBA


## HOSE BREAK VALVE


Edition. 21.0

### CS Carbon Steel

- Type: hose break valve
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE
- Pressure: up to PN350
- Temp range: from -20°C to +100°C

VBF Female insert  
VBF Male insert





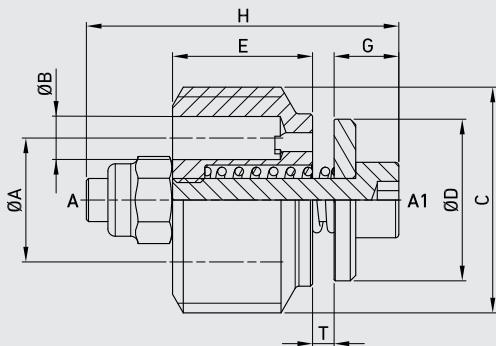


## CODE DESCRIPTION STRUCTURE

Type and way of valve	VB	G3/8	T0,5	F0,5	F (throttling hole*)
VB					∅ min      ∅ max
Ends					VB G 1/4      mm      0,50      1,00 inch      0,02      0,04
GAS DIN/ ISO 228					VB G 3/8      mm      0,50      1,25 inch      0,02      0,05
BSP					VB G 1/2      mm      0,50      1,50 inch      0,02      0,06
G 1/4					VB G 3/4      mm      0,50      2,50 inch      0,02      0,10
G 3/8					VB G 1      mm      0,50      3,00 inch      0,02      0,12
G 1/2					
G 3/4					
G 1					
Setting	0,25 > 4,25				* omit if not requested

## VB VALVE

TYPE	FLOW min-max l/min	∅A	∅B	C	∅D	E	G	H	WEIGHT	ITEM CODE
										CS Carbon Steel
VB G 1/4	8-25	mm 8,5 inch 0,33	2,4 0,09	1/4	9,5 0,37	8 0,31	5,0 0,20	23 0,91	kg 0,0065 lb 0,01	G540102A01AAPAA
VB G 3/8	16-50	mm 11 inch 0,43	3,5 0,14	3/8	12,5 0,49	11 0,43	5,0 0,20	23 0,91	kg 0,0125 lb 0,03	G540103A01AAPAA
VB G 1/2	25-80	mm 13 inch 0,51	4,5 0,18	1/2	15,0 0,59	13 0,51	6,0 0,24	29 1,14	kg 0,0235 lb 0,05	G540104A01AAPAA
VB G 3/4	50-150	mm 16 inch 0,63	6 0,24	3/4	18,5 0,73	18 0,71	6,0 0,24	34 1,34	kg 0,0460 lb 0,10	G540105A01AAPAA
VB G 1	70-200	mm 20 inch 0,79	7 0,28	1	23,0 0,91	21 0,83	7,5 0,30	40 1,57	kg 0,0945 lb 0,21	G540106A01AAPAA

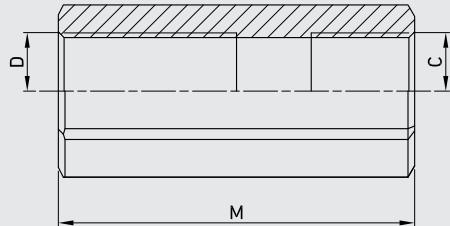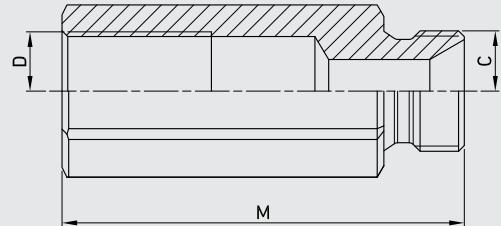**VBF** Female housing**VBM** Male housing**VBF** Female housing



TYPE	CS	C-D	B		M	WEIGHT	Q (L/1')	ITEM CODE	CS
			mm	inch					Carbon Steel
VBF G 1/4	1/4	G 1/4	mm 19	48	kg 0,01	lb 0,02	28	C01AA03583A010Z	Carbon Steel
			inch 0,75	1,89					
VBF G 3/8	3/8	G 3/8	mm 22	52	kg 0,01	lb 0,02	50	C01AA03584A010Z	Carbon Steel
			inch 0,87	2,05					
VBF G 1/2	1/2	G 1/2	mm 27	60	kg 0,02	lb 0,04	85	C01AA03585A010Z	Carbon Steel
			inch 1,06	2,36					
VBF G 3/4	3/4	G 3/4	mm 36	72	kg 0,05	lb 0,11	150	C01AA03586A010Z	Carbon Steel
			inch 1,42	2,83					
VBF G 1	1	G 1	mm 46	85	kg 0,09	lb 0,20	180	C01AA03587A010Z	Carbon Steel
			inch 1,81	3,35					

**VBM** Male housing


TYPE	CS	C-D	B		M	WEIGHT	Q (L/1')	ITEM CODE	CS
			mm	inch					Carbon Steel
VBM G 1/4	1/4	G 1/4	mm 19	48	kg 0,01	lb 0,02	28	C01AA03578A010Z	Carbon Steel
			inch 0,75	1,89					
VBM G 3/8	3/8	G 3/8	mm 22	58	kg 0,01	lb 0,02	50	C01AA03579A010Z	Carbon Steel
			inch 0,87	2,28					
VBM G 1/2	1/2	G 1/2	mm 27	65	kg 0,02	lb 0,04	85	C01AA03580A010Z	Carbon Steel
			inch 1,06	2,56					
VBM G 3/4	3/4	G 3/4	mm 36	78	kg 0,05	lb 0,11	150	C01AA03581A010Z	Carbon Steel
			inch 1,42	3,07					
VBM G 1	1	G 1	mm 46	85	kg 0,09	lb 0,20	180	C01AA03582A010Z	Carbon Steel
			inch 1,81	3,35					

**PRESSURE DROP CURVES**

For actuator moved by directional control valve, the reaction flow has to be calculated multiply the nominal flow by 1.5 and by 2 for actuator moved by solenoid operated directional control valve. It is normal to set the reaction flow 1.5 times the rate flow of the system. If not required, the setting of "T" will be supplied at the maximum value.

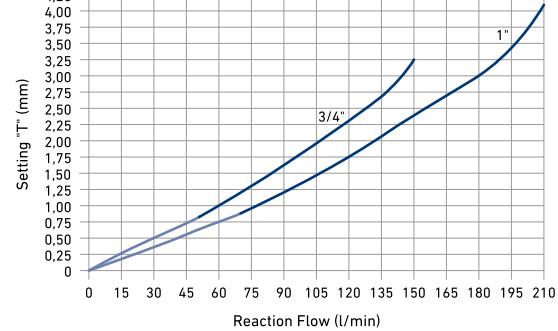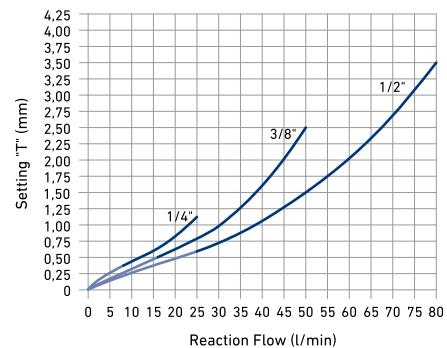**Warning**

The setting values indicated in this diagram are indicative, for any setting value of "T", the reaction flow can change by ±10% and beyond based on the features of the equipment in which they are installed.

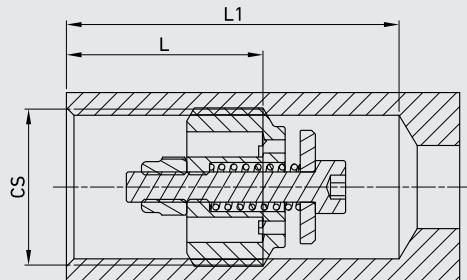**Applications**

Screw in the valve connecting 1 to the pressure flow and 2 to the actuator. The use together with flow control valve is recommended.

**VB + VBF Assembled (Female-Female)**

TYPE	FLOW min-max l/min	MAX PRESSURE	T	CS	CAVITY		ITEM CODE	CS Carbon Steel
					L	L1		
VB G 1/4	8-25	35 MPa 5075 PSI	see diagram	1/4	mm 24,2 inch 0,95	35,2 1,39	G480202A0100PAA	
VB G 3/8	16-50			3/8	mm 26,2 inch 1,03	37,1 1,46	G480203A0100PAA	
VB G 1/2	25-80			1/2	mm 30,3 inch 1,19	45,2 1,78	G480204A0100PAA	
VB G 3/4	50-150			3/4	mm 38,1 inch 1,50	54,2 2,13	G480205A0100PAA	
VB G 1	70-200			1	mm 46,2 inch 1,82	66,1 2,60	G480206A0100PAA	

**VB + VBM Assembled (Male-Female)**

TYPE	FLOW min-max l/min	MAX PRESSURE	T	CS	CAVITY		ITEM CODE	CS Carbon Steel
					L	L1		
VB G 1/4	8-25	35 MPa 5075 PSI	see diagram	1/4	mm 24,2 inch 0,95	35,2 1,39	G580302A0100PAA	
VB G 3/8	16-50			3/8	mm 26,2 inch 1,03	37,1 1,46	G580303A0100PAA	
VB G 1/2	25-80			1/2	mm 30,3 inch 1,19	45,2 1,78	G580304A0100PAA	
VB G 3/4	50-150			3/4	mm 38,1 inch 1,50	54,2 2,13	G580305A0100PAA	
VB G 1	70-200			1	mm 46,2 inch 1,82	66,1 2,60	G580306A0100PAA	



# I SJ

## SWIVEL JOINTS


Edition. 21.0


### Carbon Steel

- Type: swivel joint / at 90°
- Sizes: from DN6 up to DN50
- Ends: BSP- NPT (on request)
- Pressure: up to PN400
- Temp range: from -20°C to +80°C




## CODE DESCRIPTION STRUCTURE

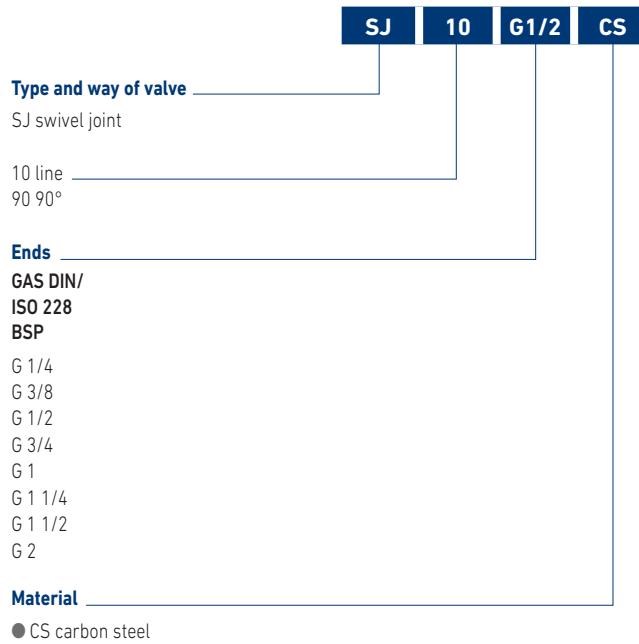

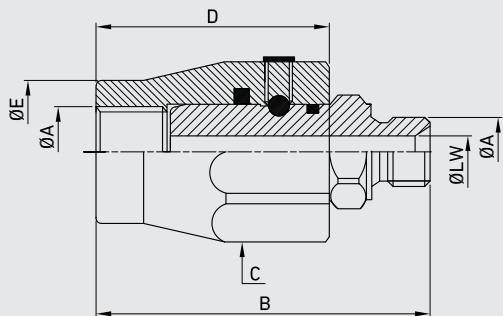

SJ - IN LINE FROM 1/4" TO 1/2"

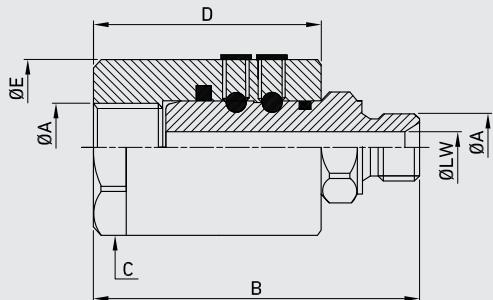


SJ - IN LINE FROM 3/4" TO 2"

### SJ - IN LINE FROM 1/4" TO 1/2"


TYPE	ØA	C	B	D	ØE	ØLW	MAX ROTATING PRESSURE	MAX STATIC PRESSURE	MAX FLOW L/min	ITEM CODE	CS Carbon Steel
SJ10 IN LINE 1/4 BSP	G 1/4	mm 30 inch 2,40	61 1,65	42 0,94	24 0,24	6	MPa 20 Psi 2900	40 5800	25	NSJ2G010000	
SJ10 IN LINE 3/8 BSP	G 3/8	mm 34 inch 2,60	66 1,73	44 0,98	25 0,33	8,5	MPa 20 Psi 2900	40 5800	35	NSJ2G020000	
SJ10 IN LINE 1/2 BSP	G 1/2	mm 36 inch 2,80	71 1,85	47 1,26	32 0,45	11,5	MPa 15 Psi 2175	30 4350	60	NSJ2G030000	

### SJ - IN LINE FROM 3/4" TO 2"

TYPE	ØA	C	B	D	ØE	ØLW	MAX ROTATING PRESSURE	MAX STATIC PRESSURE	MAX FLOW L/min	ITEM CODE	CS Carbon Steel
SJ10 IN LINE 3/4 BSP	G 3/4	mm 45 inch 1,77	87,5 3,44	56,5 2,22	49,5 1,95	15 0,59	MPa 15 Psi 2175	30 4350	100	NSJ2G040000	
SJ10 IN LINE 1" BSP	G 1	mm 50 inch 1,97	93,7 3,69	61,5 2,42	54,5 2,15	20 0,79	MPa 10 Psi 1450	25 3625	180	NSJ2G050000	
SJ10 IN LINE 1"1/4 BSP	G 1 1/4	mm 55 inch 2,17	101 3,98	63 2,48	60 2,36	28 1,10	MPa 10 Psi 1450	30 4350	270	NSJ2G060000	
SJ10 IN LINE 1"1/2 BSP	G 1 1/2	mm 65 inch 2,56	110 4,33	70 2,76	69,5 2,74	35 1,38	MPa 8 Psi 1160	30 4350	350	NSJ2G070000	
SJ10 IN LINE 2" BSP	G 2	mm 75 inch 2,95	119 4,69	75 2,95	84,5 3,33	44 1,73	MPa 5 Psi 725	30 4350	700	NSJ2G080000	

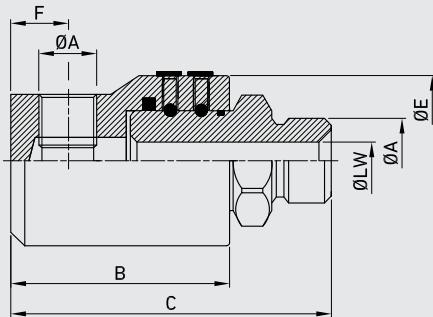

SJ - AT 90° FROM 1/4" TO 1"

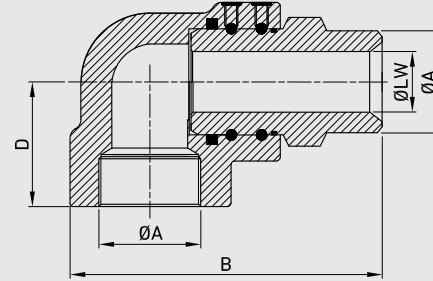

SJ - AT 90° FROM 1 1/4" TO 2"

### SJ - AT 90° FROM 1/4" TO 1"

TYPE	ØA	B		ØLW	ØE	F	MAX ROTATING PRESSURE	MAX STATIC PRESSURE	MAX FLOW L/min	ITEM CODE	CS
		mm	inch								Carbon Steel
SJ90 AT 90 1/4 BSP	G 1/4	mm	50	70	6	33,5	11	MPa	20	40	NSJ1G010000
		inch	1,97	2,76	0,24	1,32	0,43	Psi	2900	5800	
SJ90 AT 90 3/8 BSP	G 3/8	mm	54	77	8,5	37,5	13	MPa	20	40	NSJ1G020000
		inch	2,13	3,03	0,33	1,48	0,51	Psi	2900	5800	
SJ90 AT 90 1/2 BSP	G 1/2	mm	63	87	11,5	39,5	14	MPa	15	30	NSJ1G030000
		inch	2,48	3,43	0,45	1,56	0,55	Psi	2175	4350	
SJ90 AT 90 3/4 BSP	G 3/4	mm	74	104	15	54,5	19,5	MPa	15	30	NSJ1G040000
		inch	2,91	4,09	0,59	2,15	0,77	Psi	2175	4350	
SJ90 AT 90 1" BSP	G 1	mm	87	119	21	55	60	MPa	10	30	NSJ1G050000
		inch	3,43	4,69	0,83	2,17	2,36	Psi	1450	4350	

### SJ - AT 90° FROM 1 1/4" TO 2"

TYPE	ØA	B		D	ØLW	MAX ROTATING PRESSURE	MAX STATIC PRESSURE	MAX FLOW L/min	ITEM CODE	CS
		mm	inch							Carbon Steel
SJ90 AT 90 1"1/4 BSP	G 1 1/4	mm	119,5	52	28	MPa	10	30	270	NSJ1G060000
		inch	4,70	2,05	1,10	Psi	1450	4350		
SJ90 AT 90 1"1/2 BSP	G 1 1/2	mm	140	62	35	MPa	8	30	350	NSJ1G070000
		inch	5,51	2,44	1,38	Psi	1160	4350		
SJ90 AT 90 2" BSP	G 2	mm	151	64	44	MPa	5	25	700	NSJ1G080000
		inch	5,94	2,52	1,73	Psi	725	3625		




# ■ DDF



## 3 WAYS FLOW DIVIDERS

Edition. 21.0

### CS Carbon Steel

- **Cast iron**
- Type: 3 ways flow dividers
- Pressure: up to PN300



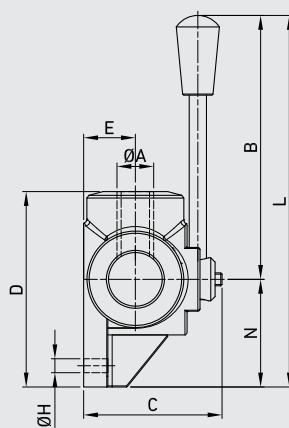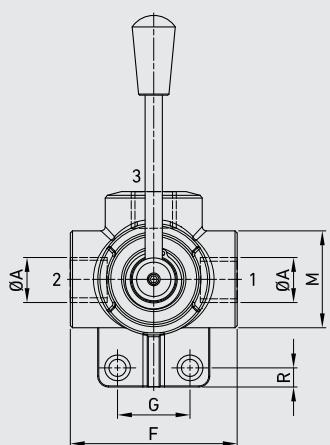

## CODE DESCRIPTION STRUCTURE

	<b>DDF</b>	<b>G1/2</b>	
Type and way of valve			
DDF 3 ways flow dividers			
Ends			
GAS DIN/ ISO 228 BSP			
G 1/4 G 3/8 G 1/2 G 3/4 G 1			

## ■ DDF - 3 ways flow dividers with open centre

TYPE	A	PORTATA MAX (MAX FLOW) L/min	PRESSIONE MAX (MAX PRESSURE)	B	C	D	E	F	G	H	L	M	N	R	WEIGHT	ITEM CODE	CS	
				MPa	30	mm	128	62	77	21	73	24	8,5	169	35	41	14,5	kg
DDF3 BSP 1/4 - 140	G 1/4	40	MPa	30	mm	128	62	77	21	73	24	8,5	169	35	41	14,5	NDF1G010000	NDF1G010000
			Psi	4350	inch	5,04	2,44	3,03	0,83	2,87	0,94	0,33	6,65	1,38	1,61	0,57		
DDF3 BSP 3/8 - 380	G 3/8	60	MPa	30	mm	128	62	77	21	73	24	8,5	169	35	41	14,5	NDF1G020000	NDF1G020000
			Psi	4350	inch	5,04	2,44	3,03	0,83	2,87	0,94	0,33	6,65	1,38	1,61	0,57		
DDF3 BSP 1/2 - 120	G 1/2	90	MPa	25	mm	128	70	96	25	85	32	10,5	180	40	52	17	NDF1G030000	NDF1G030000
			Psi	3625	inch	5,04	2,76	3,78	0,98	3,35	1,26	0,41	7,09	1,57	2,05	0,67		
DDF3 BSP 3/4 - 340	G 3/4	120	MPa	22	mm	125	80	100	28	90	32	10,5	180	45	55	14	NDF1G040000	NDF1G040000
			Psi	3190	inch	4,92	3,15	3,94	1,10	3,54	1,26	0,41	7,09	1,77	2,17	0,55		
DDF3 BSP 1" - 100	G 1	200	MPa	22	mm	140	90	115	32,5	96	32	11	207	56	67	17	NDF1G050000	NDF1G050000
			Psi	3190	inch	5,51	3,54	4,53	1,28	3,78	1,26	0,43	8,15	2,20	2,64	0,67		



# VBP

Edition. 21.0

## cs Carbon Steel

### • VBPSE

- Type: single pilot operated check valves
- Sizes: from DN6 up to DN50
- Ends: BSP
- Pressure: up to PN350
- Temp range: from -20°C to +100°C

### • VBPDE

- Type: double pilot operated check valves
- Sizes: from DN6 up to DN50
- Ends: BSP
- Pressure: up to PN350
- Temp range: from -20°C to +100°C

### • VBPDE CEXC

- Type: double pilot operated check valves
- Sizes: from DN6 up to DN50
- Ends: BSP
- Pressure: up to PN350
- Temp range: from -20°C to +100°C



## CODE DESCRIPTION STRUCTURE

**VBPSE | G1/2 | CS**

**Type and way of valve**

VBPSE single pilot operated check valves

**Ends**

GAS DIN/

ISO 228

BSP

G 1/4


G 3/8

G 1/2

G 3/4

**Material**

● CS carbon steel

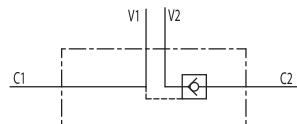

**VBPDE | G1/2 | CS**

**Type and way of valve**

VBPDE double pilot operated check valves

**Ends**

GAS DIN/

ISO 228

BSP

G 1/4


G 3/8

G 1/2

G 3/4

**Material**

● CS carbon steel

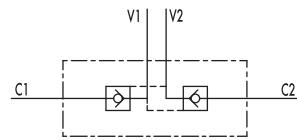

**VBPDE  
CEXC | G1/2 | CS**

**Type and way of valve**

VBPDE CEXC double pilot operated check valves

**Ends**

GAS DIN/

ISO 228

BSP

G 1/4


G 3/8


G 1/2

G 3/4

**Material**

● CS carbon steel

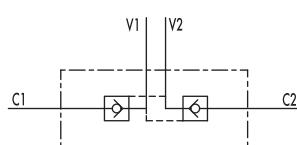

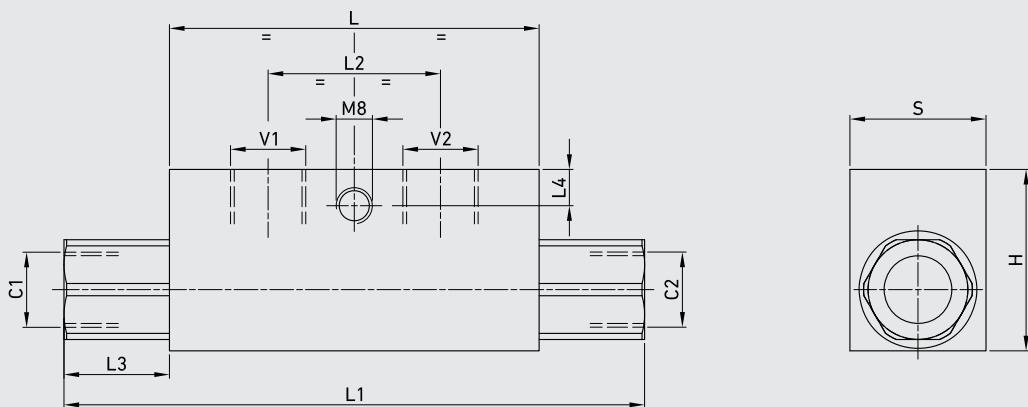



### VBPSE Single pilot operated check valves

**CS**  
Carbon Steel

TYPE	V1 - V2 C1 - C2 GAS - MET	MAX PRESSURE	CRACKING PRESSURE	L	L1	L2	L3	L4	H	S	WEIGHT	ITEM CODE	
VBPSE 1/4" L	G 1/4"	MPa	35	0,4	mm	64	106,5	36	18,5	8	40	30	kg 0,612
		Psi	5075	58	inch	2,52	4,19	1,42	0,73	0,31	1,57	1,18	lb 1,35
VBPSE 3/8" L	G 3/8"	MPa	35	0,3	mm	80	120	38	16	8	40	30	kg 0,706
		Psi	5075	43,5	inch	3,15	4,72	1,50	0,63	0,31	1,57	1,18	lb 1,56
VBPSE 1/2" L	G 1/2"	MPa	35	0,6	mm	90	133	45	17	12,5	45	35	kg 0,994
		Psi	5075	87	inch	3,54	5,24	1,77	0,67	0,49	1,77	1,38	lb 2,19
VBPSE 3/4" L	G 3/4"	MPa	35	0,2	mm	100	182	46	36	12	60	40	kg 1,792
		Psi	5075	29	inch	3,94	7,17	1,81	1,42	0,47	2,36	1,57	lb 3,95

### PRESSURE DROP CURVES

Temperature : 50°C / Oil viscosity: 30cSt

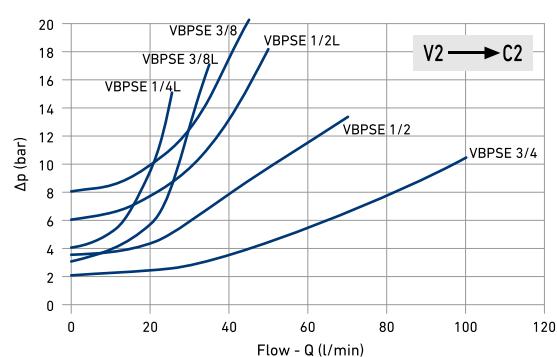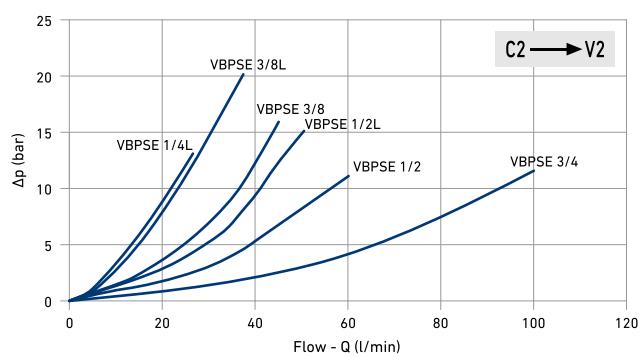



## VBPDE Double pilot operated check valves

**CS**  
Carbon Steel

TYPE	V1 - V2 C1 - C2 GAS - MET	MAX PRESSURE	CRACKING PRESSURE	L	L1	L2	L3	H	S	WEIGHT	ITEM CODE	
VBPDE 1/4" L	G 1/4"	MPa	35	0,4	mm	64	113	36	8	40	30	kg 0,636
		Psi	5075	58	inch	2,52	4,45	1,42	0,31	1,57	1,18	lb 1,40
VBPDE 3/8" L	G 3/8"	MPa	35	0,3	mm	80	128	38	8	40	30	kg 0,736
		Psi	5075	43,5	inch	3,15	5,04	1,50	0,31	1,57	1,18	lb 1,62
VBPDE 1/2" L	G 1/2"	MPa	35	0,6	mm	90	142	45	12,5	45	35	kg 1,042
		Psi	5075	87	inch	3,54	5,59	1,77	0,49	1,77	1,38	lb 2,30
VBPDE 3/4" L	G 3/4"	MPa	30	0,2	mm	100	192	46	12	60	40	kg 1,916
		Psi	4350	29	inch	3,94	7,56	1,81	0,47	2,36	1,57	lb 4,22

## PRESSURE DROP CURVES

Temperature : 50°C / Oil viscosity: 30cSt

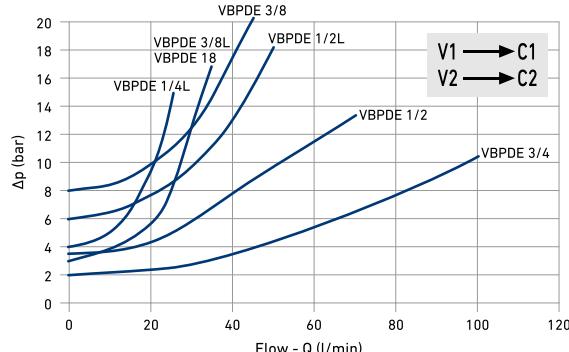
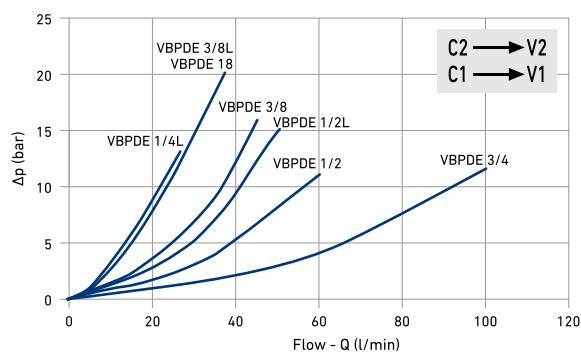


## VBPDE CEXC Double pilot operated check valves for 12mm pipe mounting din (2353)

TYPE	V1 - V2 C1 - C2 GAS - MET	MAX PRESSURE	CRACKING PRESSURE	L	L1	L2	L3	H	S	WEIGHT		
VBPDE 1/4" L 2 CEXC-10L	G 1/4"	MPa	35	0,7	mm	64	125	36	160	40	30	kg 0,644
		Psi	5075	101,5	inch	2,52	4,92	1,42	6,30	1,57	1,18	lb 1,42
VBPDE 1/4" L 2 CEXC	G 1/4"	MPa	35	0,4	mm	64	130	36	160	40	30	kg 0,648
		Psi	5075	58	inch	2,52	5,12	1,42	6,30	1,57	1,18	lb 1,43
VBPDE 3/8" L 2 CEXC	G 3/8"	MPa	35	0,4	mm	64	130	36	166	40	30	kg 0,630
		Psi	5075	58	inch	2,52	5,12	1,42	6,54	1,57	1,18	lb 1,39

## PRESSURE DROP CURVES

Temperature : 50°C / Oil viscosity: 30cSt

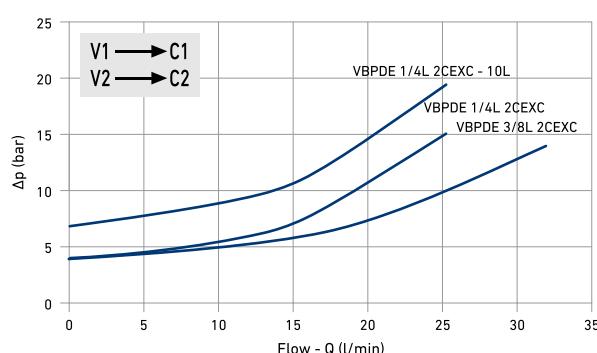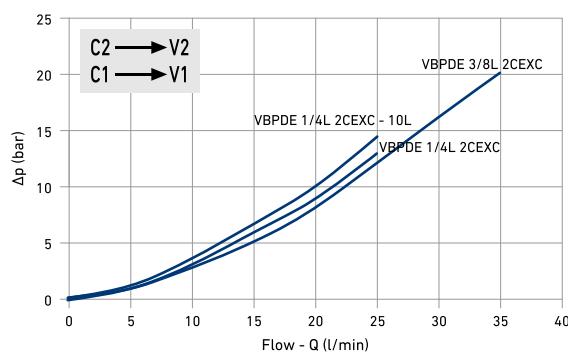





## FLOATING & TRUNNION DESIGN

For Oil&Gas fields, **GEMELS** produces ball valves from  $\frac{1}{4}$ " up to 36", ensuring material 100% Made in Italy/EU. **GEMELS** valves are in accordance to the international norms and to the specifications of the biggest global players in downstream, midstream e upstream fields, both for onshore and offshore application. In addition to manual valves, cooperating with the most important manufacturers of actuators, **GEMELS** supplies also the complete package with pneumatic, electric, Gas-Over-Oil, hydraulic actuators and HIPPS system.



OIL & GAS



## GN

2-WAY HIGH PRESSURE  
BALL VALVES

Edition. 21.0


## CS Carbon Steel

- Type: ball valve 2way
- Sizes: from DN6 to DN50
- Ends: BSP-NPT-SW-SWXT -PE BW
- O-Rings: NBR, FKM, EPDM, MVQ
- Pressure: up to PN500 / S6000
- Temp range: -46°C to +250°C

## SS Stainless Steel

- Type: ball valve 2way
- Sizes: from DN6 up to DN50
- Ends: BSP-NPT-SW-SWXT -PE BW
- O-Rings: NBR, FKM, EPDM, MVQ
- Pressure: up to PN500 / S6000
- Temp range: -30°C to +100°C

## STANDARD COMPOSITION OF VALVE

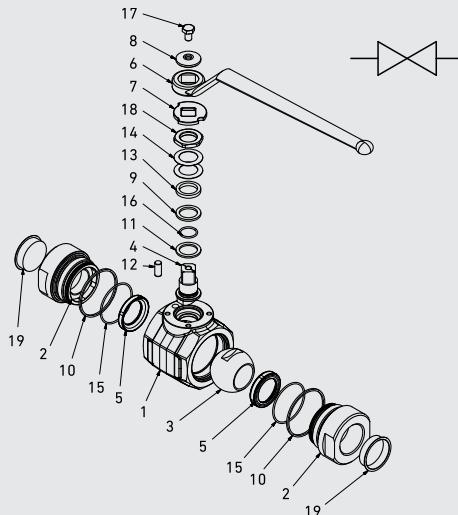

POS	DESCRIPTION	Q.TY	CS	SS	CS	SS
			Carbon Steel	Stainless Steel	Carbon Steel	Stainless Steel
MATERIAL						
1	Body	1	ASTM A105	ASTM A182 F316	11	PTFE
2	Adapter	2	ASTM A105	ASTM A182 F316	12	AISI 316
3	Ball	1	ASTM A479 Tp.316	ASTM A479 Tp.316	13	AISI 316
4	Stem	1	ASTM A479 Tp.316	ASTM A479 Tp.316	14	AISI 316
5	Ball seat	2	POM	POM	15	NBR
6	Handle	1	Fe37	Fe42	16	NBR
7	Washer	1	AISI 316	AISI 316	17	ISO 4762 A4
8	Washer	1	AISI 316	AISI 316	18	AISI 316
9	Body ring	1	Graphite	Graphite	19	PVC
10	Adapter ring	2	Graphite	Graphite	ISO4762 A4	



## CODE DESCRIPTION STRUCTURE

GN	G1 1/2	DN13	A105	F316	POM	B
----	--------	------	------	------	-----	---

Type and way of valve \_\_\_\_\_

GN 2-way

Ends \_\_\_\_\_

GAS DIN/ ISO 228 BSP	NPT ANSI /ASME B1.20.1	SW	SW EXTRALONG	PE
G 1/4	N 1/4	SW 1/4	SWXT 1/4	PE 1/4
G 3/8	N 3/8	SW 3/8	SWXT 3/8	PE 3/8
G 1/2	N 1/2	SW 1/2	SWXT 1/2	PE 1/2
G 3/4	N 3/4	SW 3/4	SWXT 3/4	PE 3/4
G 1	N 1	SW 1	SWXT 1	PE 1
G 1 1/4	N 1 1/4	SW 1 1/4	SWXT 1 1/4	PE 1 1/4
G 1 1/2	N 1 1/2	SW 1 1/2	SWXT 1 1/2	PE 1 1/2
G 2	N 2	SW 2	SWXT 2	PE 2

Sizes \_\_\_\_\_

DN6  
DN10  
DN13  
DN20  
DN25  
DN32  
DN40  
DN50

Body and adapter material \_\_\_\_\_

A105      LF2  
 F316

Stem and ball material \_\_\_\_\_

F316  
 F316

Ball seat material \_\_\_\_\_

A = POM   D = PEEK\*


Adapter and stem seal material \_\_\_\_\_

B = NBR   E = FKM\*   F = EPDM\*   L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN500 or 6000 Psi
- Locking device
- Pneumatic and electrical actuator

For further special requests please consult our technical/commercial service.

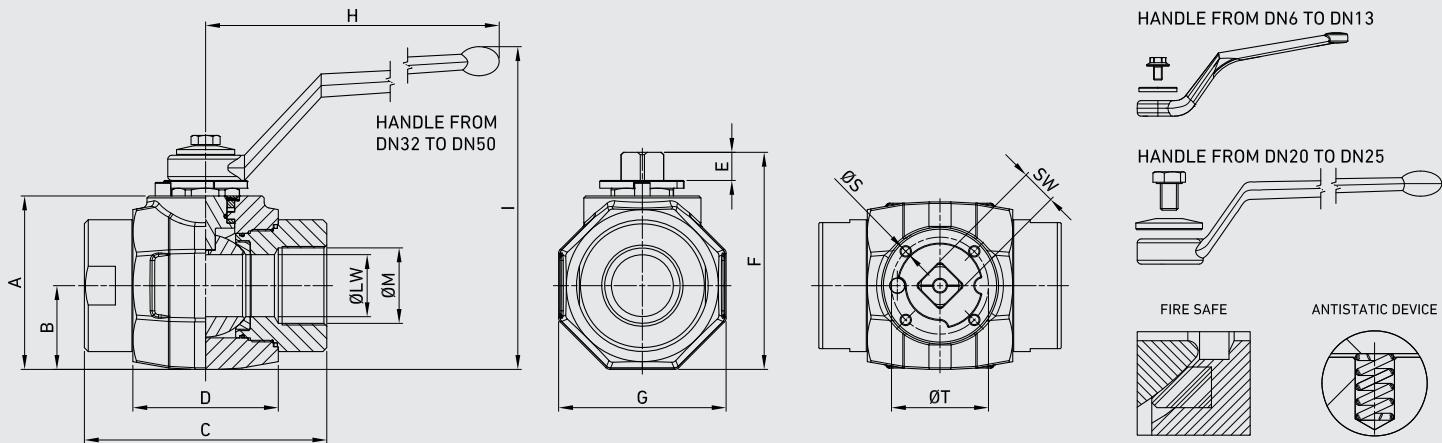

## ■ GN DIN/ISO 228 BSP

TYPE	DN	A	B	C	D	E	F	ØG*	H	I	ØLW	ØM	ØS	ISO 5211	ØT	SW	WEIGHT	
GN G 1/4	6	mm	53	27	72	44	9,4	70	54	110	109	6	G 1/4	M5	F03	36	9	kg 1,042
		inch	2,09	1,06	2,83	1,73	0,37	2,76	2,13	4,33	4,29	0,24				1,42	0,35	lb 2,30
GN G 3/8	10	mm	53	27	73	44	9,4	70	54	110	109	10	G 3/8	M5	F03	36	9	kg 1,106
		inch	2,09	1,06	2,87	1,73	0,37	2,76	2,13	4,33	4,29	0,39				1,42	0,35	lb 2,44
GN G 1/2	13	mm	58	29,5	81	48	9,4	75,3	59	110	114	13	G 1/2	M5	F03	36	9	kg 1,328
		inch	2,28	1,16	3,19	1,89	0,37	2,96	2,32	4,33	4,49	0,51				1,42	0,35	lb 2,93
GN G 3/4	20	mm	72,6	37	98	62	13,4	95,1	74	200	130	20	G 3/4	M6	F05	50	14	kg 2,638
		inch	2,86	1,46	3,86	2,44	0,53	3,74	2,91	7,87	5,12	0,79				1,97	0,55	lb 5,82
GN G 1	25	mm	81	41,5	106	66	13,4	104	83	200	138	25	G 1	M6	F05	50	14	kg 3,45
		inch	3,19	1,63	4,17	2,60	0,53	4,09	3,27	7,87	5,43	0,98				1,97	0,55	lb 7,61
GN G 1 1/4	32	mm	89	42,5	127	75	14	112	85	300	166	32	G 1 1/4	M6	F05	50	17	kg 3,651
		inch	3,50	1,67	5,00	2,95	0,55	4,41	3,35	11,81	6,54	1,26				1,97	0,67	lb 12,90
GN G 1 1/2	40	mm	106	52,5	135	85	14	105	105	300	184	40	G 1 1/2	M6	F05	50	17	kg 7,088
		inch	4,17	2,07	5,31	3,35	0,55	4,13	4,13	11,81	7,24	1,57				1,97	0,67	lb 17,78
GN G 2	50	mm	115,5	58,5	160	97,85	14	117	117	300	193	50	G 2	M6	F05	50	17	kg 9,562
		inch	4,55	2,30	6,30	3,85	0,55	4,61	4,61	11,81	7,60	1,97				1,97	0,67	lb 22,95

**(POM SEAL)**

GN DIN/ISO 228 PN

		CS Carbon Steel	SS Stainless Steel	
DN	PN	ITEM CODE		
6	MPa 50 Psi 7250	GN2GGT15024A000	GN2GGT15044A000	
10	MPa 50 Psi 7250	GN2GGT25024A000	GN2GGT25044A000	
13	MPa 50 Psi 7250	GN2GGT35024A000	GN2GGT35044A000	
20	MPa 40 Psi 5800	GN2GGT44024A000	GN2GGT44044A000	
25	MPa 35 Psi 5075	GN2GGT53024A000	GN2GGT53044A000	
32	MPa 35 Psi 5075	GN2GGT63024A000	GN2GGT63044A000	
40	MPa 35 Psi 5075	GN2GGT73024A000	GN2GGT73044A000	
50	MPa 35 Psi 5075	GN2GGT83024A000	GN2GGT83044A000	

**(PEEK SEAL)**

GN DIN/ISO 228 PN

		CS Carbon Steel	SS Stainless Steel	
DN	PN	ITEM CODE		
6	MPa 50 Psi 7250	GN2GGT15024P000	GN2GGT15044P000	
10	MPa 50 Psi 7250	GN2GGT25024P000	GN2GGT25044P000	
13	MPa 50 Psi 7250	GN2GGT35024P000	GN2GGT35044P000	
20	MPa 42 Psi 6090	GN2GGT44024P000	GN2GGT44044P000	
25	MPa 42 Psi 6090	GN2GGT53024P000	GN2GGT53044P000	
32	MPa 35 Psi 5075	GN2GGT63024P000	GN2GGT63044P000	
40	MPa 35 Psi 5075	GN2GGT73024P000	GN2GGT73044P000	
50	MPa 35 Psi 5075	GN2GGT83024P000	GN2GGT83044P000	

**(POM SEAL)**


GN DIN/ISO 228 S6000

		CS Carbon Steel	SS Stainless Steel	
DN	PN	ITEM CODE		
6	MPa 41,4 Psi 6000	GN2GGT1G024A000	GN2GGT1G044A000	
10	MPa 41,4 Psi 6000	GN2GGT2G024A000	GN2GGT2G044A000	
13	MPa 41,4 Psi 6000	GN2GGT3G024A000	GN2GGT3G044A000	
20	MPa 41,4 Psi 6000	GN2GGT4G024A000	GN2GGT4G044A000	
25	MPa 41,4 Psi 6000	GN2GGT5G024A000	GN2GGT5G044A000	
32	MPa 41,4 Psi 6000	GN2GGT6G024A000	GN2GGT6G044A000	
40	MPa 41,4 Psi 6000	GN2GGT7G024A000	GN2GGT7G044A000	
50	MPa 41,4 Psi 6000	GN2GGT8G024A000	GN2GGT8G044A000	

**(PEEK SEAL)**

GN DIN/ISO 228 S6000

		CS Carbon Steel	SS Stainless Steel	
DN	PN	ITEM CODE		
6	MPa 41,4 Psi 6000	GN2GGT1G024P000	GN2GGT1G044P000	
10	MPa 41,4 Psi 6000	GN2GGT2G024P000	GN2GGT2G044P000	
13	MPa 41,4 Psi 6000	GN2GGT3G024P000	GN2GGT3G044P000	
20	MPa 41,4 Psi 6000	GN2GGT4G024P000	GN2GGT4G044P000	
25	MPa 41,4 Psi 6000	GN2GGT5G024P000	GN2GGT5G044P000	
32	MPa 41,4 Psi 6000	GN2GGT6G024P000	GN2GGT6G044P000	
40	MPa 41,4 Psi 6000	GN2GGT7G024P000	GN2GGT7G044P000	
50	MPa 41,4 Psi 6000	GN2GGT8G024P000	GN2GGT8G044P000	

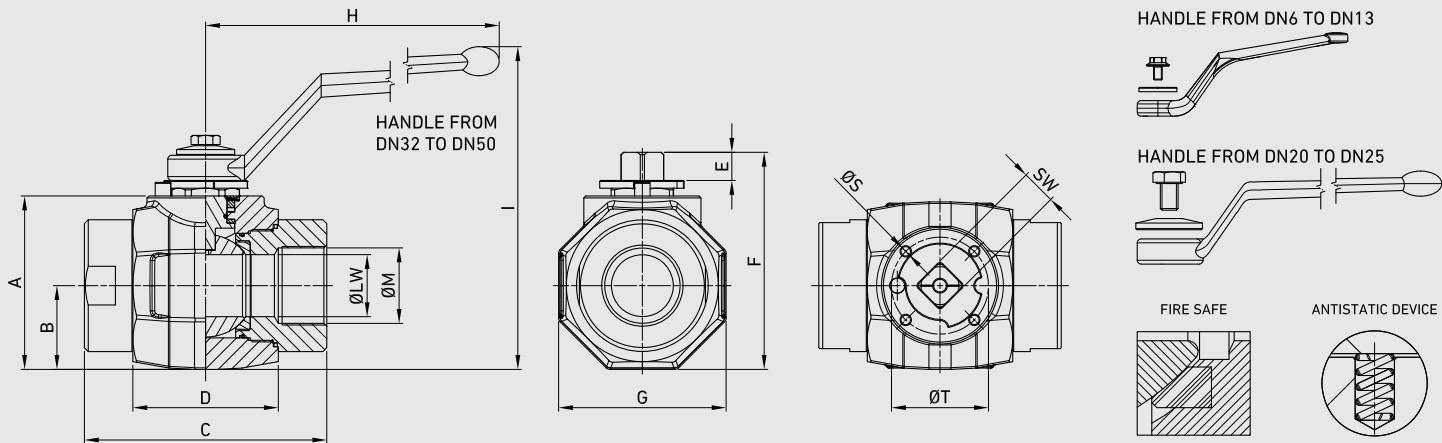

## ■ GN ANSI/ASME B1.20.1 NPT

TYPE	DN	A	B	C	D	E	F	ØG*	H	I	ØLW	ØM	ØS	ISO 5211	ØT	SW	WEIGHT	
GN N 1/4	6	mm	53	27	72	44	9,4	70	54	110	109	6	N 1/4	M5	F03	36	9	kg 1,042
		inch	2,09	1,06	2,83	1,73	0,37	2,76	2,13	4,33	4,29	0,24				1,42	0,35	lb 2,30
GN N 3/8	10	mm	53	27	73	44	9,4	70	54	110	109	10	N 3/8	M5	F03	36	9	kg 1,106
		inch	2,09	1,06	2,87	1,73	0,37	2,76	2,13	4,33	4,29	0,39				1,42	0,35	lb 2,44
GN N 1/2	13	mm	58	29,5	81	48	9,4	75,5	59	110	114	13	N 1/2	M5	F03	36	9	kg 1,328
		inch	2,28	1,16	3,19	1,89	0,37	2,97	2,32	4,33	4,49	0,51				1,42	0,35	lb 2,93
GN N 3/4	20	mm	72,6	37	98	62	13,4	95,5	74	200	130	20	N 3/4	M6	F05	50	14	kg 2,638
		inch	2,86	1,46	3,86	2,44	0,53	3,76	2,91	7,87	5,12	0,79				1,97	0,55	lb 5,82
GN N 1	25	mm	81	41,5	106	66	13,4	104	83	200	138	25	N 1	M6	F05	50	14	kg 3,45
		inch	3,19	1,63	4,17	2,60	0,53	4,09	3,27	7,87	5,43	0,98				1,97	0,55	lb 7,61
GN N 1 1/4	32	mm	89	42,5	127	75	14	112	85	300	166	32	N 1 1/4	M6	F05	50	17	kg 3,651
		inch	3,50	1,67	5,00	2,95	0,55	4,41	3,35	11,81	6,54	1,26				1,97	0,67	lb 12,90
GN N 1 1/2	40	mm	106	52,5	135	85	14	105	105	300	184	40	N 1 1/2	M6	F05	50	17	kg 7,088
		inch	4,17	2,07	5,31	3,35	0,55	4,13	4,13	11,81	7,24	1,57				1,97	0,67	lb 17,78
GN N 2	50	mm	115,5	58,5	160	97,85	14	117	117	300	193	50	N 2	M6	F05	50	17	kg 9,562
		inch	4,55	2,30	6,30	3,85	0,55	4,61	4,61	11,81	7,60	1,97				1,97	0,67	lb 22,95

**(POM SEAL)**

GN ANSI/ASME B1.20.1 NPT PN

		CS Carbon Steel	SS Stainless Steel
DN	PN	ITEM CODE	
6	MPa 50	GN2NNT15024A000	GN2NNT15044A000
	Psi 7250		
10	MPa 50	GN2NNT25024A000	GN2NNT25044A000
	Psi 7250		
13	MPa 50	GN2NNT35024A000	GN2NNT35044A000
	Psi 7250		
20	MPa 40	GN2NNT44024A000	GN2NNT44044A000
	Psi 5800		
25	MPa 35	GN2NNT53024A000	GN2NNT53044A000
	Psi 5075		
32	MPa 35	GN2NNT63024A000	GN2NNT63044A000
	Psi 5075		
40	MPa 35	GN2NNT73024A000	GN2NNT73044A000
	Psi 5075		
50	MPa 35	GN2NNT83024A000	GN2NNT83044A000
	Psi 5075		

**(PEEK SEAL)**

GN ANSI/ASME B1.20.1 NPT PN

		CS Carbon Steel	SS Stainless Steel
DN	PN	ITEM CODE	
6	MPa 50	GN2NNT15024P000	GN2NNT15044P000
	Psi 7250		
10	MPa 50	GN2NNT25024P000	GN2NNT25044P000
	Psi 7250		
13	MPa 50	GN2NNT35024P000	GN2NNT35044P000
	Psi 7250		
20	MPa 42	GN2NNT44024P000	GN2NNT44044P000
	Psi 6090		
25	MPa 42	GN2NNT53024P000	GN2NNT53044P000
	Psi 6090		
32	MPa 35	GN2NNT63024P000	GN2NNT63044P000
	Psi 5075		
40	MPa 35	GN2NNT73024P000	GN2NNT73044P000
	Psi 5075		
50	MPa 35	GN2NNT83024P000	GN2NNT83044P000
	Psi 5075		

**(POM SEAL)**


GN ANSI/ASME B1.20.1 NPT S6000

		CS Carbon Steel	SS Stainless Steel
DN	PN	ITEM CODE	
6	MPa 41,4	GN2NNT1G024A000	GN2NNT1G044A000
	Psi 6000		
10	MPa 41,4	GN2NNT2G024A000	GN2NNT2G044A000
	Psi 6000		
13	MPa 41,4	GN2NNT3G024A000	GN2NNT3G044A000
	Psi 6000		
20	MPa 41,4	GN2NNT4G024A000	GN2NNT4G044A000
	Psi 6000		
25	MPa 41,4	GN2NNT5G024A000	GN2NNT5G044A000
	Psi 6000		
32	MPa 41,4	GN2NNT6G024A000	GN2NNT6G044A000
	Psi 6000		
40	MPa 41,4	GN2NNT7G024A000	GN2NNT7G044A000
	Psi 6000		
50	MPa 41,4	GN2NNT8G024A000	GN2NNT8G044A000
	Psi 6000		

**(PEEK SEAL)**

GN ANSI/ASME B1.20.1 NPT S6000

		CS Carbon Steel	SS Stainless Steel
DN	PN	ITEM CODE	
6	MPa 41,4	GN2NNT1G024P000	GN2NNT1G044P000
	Psi 6000		
10	MPa 41,4	GN2NNT2G024P000	GN2NNT2G044P000
	Psi 6000		
13	MPa 41,4	GN2NNT3G024P000	GN2NNT3G044P000
	Psi 6000		
20	MPa 41,4	GN2NNT4G024P000	GN2NNT4G044P000
	Psi 6000		
25	MPa 41,4	GN2NNT5G024P000	GN2NNT5G044P000
	Psi 6000		
32	MPa 41,4	GN2NNT6G024P000	GN2NNT6G044P000
	Psi 6000		
40	MPa 41,4	GN2NNT7G024P000	GN2NNT7G044P000
	Psi 6000		
50	MPa 41,4	GN2NNT8G024P000	GN2NNT8G044P000
	Psi 6000		

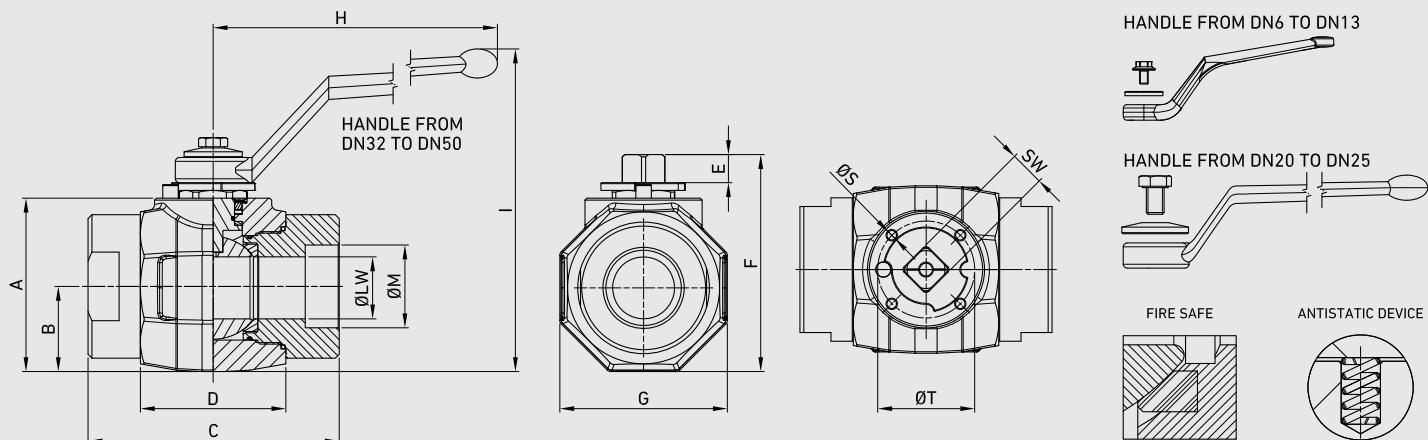

## GN SW

TYPE	DN	A	B	C	D	E	F	ØG*	H	I	ØLW	ØM	ØS	ISO 5211	ØT	SW	WEIGHT	
GN SW 1/4	6	mm	53	27	72	44	10	70	54	110	109	6	14,1	M5	F03	36	9	kg 1,042
		inch	2,09	1,06	2,83	1,73	0,39	2,76	2,13	4,33	4,29	0,24	0,56			1,42	0,35	0,35 2,30
GN SW 3/8	10	mm	53	27	72	44	10	70	54	110	109	10	17,53	M5	F03	36	9	kg 1,016
		inch	2,09	1,06	2,83	1,73	0,39	2,76	2,13	4,33	4,29	0,39	0,69			1,42	0,35	0,35 2,24
GN SW 1/2	13	mm	58	29,5	81	48	10	75,5	59	110	114	13	21,72	M5	F03	36	9	kg 1,328
		inch	2,28	1,16	3,19	1,89	0,39	2,97	2,32	4,33	4,49	0,51	0,86			1,42	0,35	0,35 2,93
GN SW 3/4	20	mm	72,6	37	98	62	14	95,5	74	200	128	20	27,05	M6	F05	50	14	kg 2,638
		inch	2,86	1,46	3,86	2,44	0,55	3,76	2,91	7,87	5,04	0,79	1,06			1,97	0,55	0,55 5,82
GN SW 1	25	mm	81	41,5	106	66	14	104	83	200	137	25	33,78	M6	F05	50	14	kg 3,45
		inch	3,19	1,63	4,17	2,60	0,55	4,09	3,27	7,87	5,39	0,98	1,33			1,97	0,55	0,55 7,61
GN SW 1 1/4	32	mm	89	42,5	127	75	14	112	85	300	166	32	42,7	M6	F05	50	17	kg 3,651
		inch	3,50	1,67	5,00	2,95	0,55	4,41	3,35	11,81	6,54	1,26	1,68			1,97	0,67	0,67 12,90
GN SW 1 1/2	40	mm	106	52,5	135	85	14	105	105	300	184	40	48,64	M6	F05	50	17	kg 7,088
		inch	4,17	2,07	5,31	3,35	0,55	4,13	4,13	11,81	7,24	1,57	1,91			1,97	0,67	0,67 17,78
GN SW 2	50	mm	115,5	58,5	160	97,85	14	117	117	300	193	50	61,2	M6	F05	50	17	kg 9,562
		inch	4,55	2,30	6,30	3,85	0,55	4,61	4,61	11,81	7,60	1,97	2,41			1,97	0,67	0,67 22,95

**(POM SEAL)**  
GN SW PN

		CS Carbon Steel	SS Stainless Steel	
DN	PN	ITEM CODE		
6	MPa 50 Psi 7250	GN2TTT15024A000	GN2TTT15044A000	
10	MPa 50 Psi 7250	GN2TTT25024A000	GN2TTT25044A000	
13	MPa 50 Psi 7250	GN2TTT35024A000	GN2TTT35044A000	
20	MPa 40 Psi 5800	GN2TTT44024A000	GN2TTT44044A000	
25	MPa 35 Psi 5075	GN2TTT53024A000	GN2TTT53044A000	
32	MPa 35 Psi 5075	GN2TTT63024A000	GN2TTT63044A000	
40	MPa 35 Psi 5075	GN2TTT73024A000	GN2TTT73044A000	
50	MPa 35 Psi 5075	GN2TTT63024A000	GN2TTT63044A000	

**(PEEK SEAL)**  
GN SW PN


		CS Carbon Steel	SS Stainless Steel	
DN	PN	ITEM CODE		
6	MPa 50 Psi 7250	GN2TTT15024P000	GN2TTT15044P000	
10	MPa 50 Psi 7250	GN2TTT25024P000	GN2TTT25044P000	
13	MPa 50 Psi 7250	GN2TTT35024P000	GN2TTT35044P000	
20	MPa 42 Psi 6090	GN2TTT44024P000	GN2TTT44044P000	
25	MPa 42 Psi 6090	GN2TTT53024P000	GN2TTT53044P000	
32	MPa 35 Psi 5075	GN2TTT63024P000	GN2TTT63044P000	
40	MPa 35 Psi 5075	GN2TTT73024P000	GN2TTT73044P000	
50	MPa 35 Psi 5075	GN2TTT83024P000	GN2TTT83044P000	

**(POM SEAL)**  
GN SW S6000

		CS Carbon Steel	SS Stainless Steel	
DN	PN	ITEM CODE		
6	MPa 41,4 Psi 6000	GN2TTT1G024A000	GN2TTT1G044A000	
10	MPa 41,4 Psi 6000	GN2TTT2G024A000	GN2TTT2G044A000	
13	MPa 41,4 Psi 6000	GN2TTT3G024A000	GN2TTT3G044A000	
20	MPa 41,4 Psi 6000	GN2TTT4G024A000	GN2TTT4G044A000	
25	MPa 41,4 Psi 6000	GN2TTT5G024A000	GN2TTT5G044A000	
32	MPa 41,4 Psi 6000	GN2TTT6G024A000	GN2TTT6G044A000	
40	MPa 41,4 Psi 6000	GN2TTT7G024A000	GN2TTT7G044A000	
50	MPa 41,4 Psi 6000	GN2TTT8G024A000	GN2TTT6G044A000	

**(PEEK SEAL)**  
GN SW S6000

		CS Carbon Steel	SS Stainless Steel	
DN	PN	ITEM CODE		
6	MPa 41,4 Psi 6000	GN2TTT1G024P000	GN2TTT1G044P000	
10	MPa 41,4 Psi 6000	GN2TTT2G024P000	GN2TTT2G044P000	
13	MPa 41,4 Psi 6000	GN2TTT3G024P000	GN2TTT3G044P000	
20	MPa 41,4 Psi 6000	GN2TTT4G024P000	GN2TTT4G044P000	
25	MPa 41,4 Psi 6000	GN2TTT5G024P000	GN2TTT5G044P000	
32	MPa 41,4 Psi 6000	GN2TTT6G024P000	GN2TTT6G044P000	
40	MPa 41,4 Psi 6000	GN2TTT7G024P000	GN2TTT7G044P000	
50	MPa 41,4 Psi 6000	GN2TTT8G024P000	GN2TTTBG044P000	

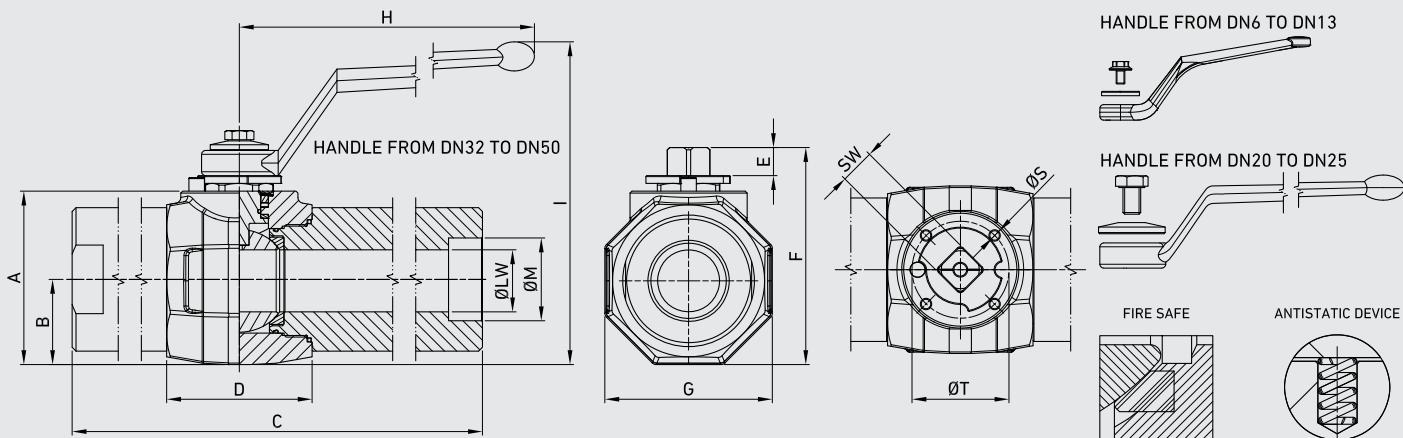

## ■ GN SW EXTRALONG

TYPE	DN	A	B	C	D	E	F	ØG*	H	I	ØLW	ØM	ØS	ISO 5211	ØT	SW	WEIGHT	
GN SWXT 1/4	6	mm	53	27	262	44	10	70	54	110	109	6	14,1	M5	F03	36	9	kg 2,702
		inch	2,09	1,06	10,31	1,73	0,39	2,76	2,13	4,33	4,29	0,24	0,56			1,42	0,35	0,35 5,96
GN SWXT 3/8	10	mm	53	27	262	44	10	70	54	110	109	10	17,53	M5	F03	36	9	kg 2,599
		inch	2,09	1,06	10,31	1,73	0,39	2,76	2,13	4,33	4,29	0,39	0,69			1,42	0,35	0,35 5,73
GN SWXT 1/2	13	mm	58	29,5	271	48	10	75,5	59	110	114	13	21,72	M5	F03	36	9	kg 3,303
		inch	2,28	1,16	10,67	1,89	0,39	2,97	2,32	4,33	4,49	0,51	0,86			1,42	0,35	0,35 7,28
GN SWXT 3/4	20	mm	72,6	37	288	62	14	95,5	74	200	128	20	27,05	M6	F05	50	14	kg 5,595
		inch	2,86	1,46	11,34	2,44	0,55	3,76	2,91	7,87	5,04	0,79	1,06			1,97	0,55	0,55 12,33
GN SWXT 1	25	mm	81	41,5	296	66	14	104	83	200	137	25	33,78	M6	F05	50	14	kg 7,534
		inch	3,19	1,63	11,65	2,60	0,55	4,09	3,27	7,87	5,39	0,98	1,33			1,97	0,55	0,55 16,61
GN SWXT 11,4	32	mm	89	42,5	318	75	14	112	85	300	166	32	42,7	M6	F05	50	17	kg 8,923
		inch	3,50	1,67	12,52	2,95	0,55	4,41	3,35	11,81	6,54	1,26	1,68			1,97	0,67	0,67 19,67
GN SWXT 1 1/2	40	mm	106	52,5	325	85	14	105	105	300	184	40	48,64	M6	F05	50	17	kg 14,49
		inch	4,17	2,07	12,80	3,35	0,55	4,13	4,13	11,81	7,24	1,57	1,91			1,97	0,67	0,67 31,94
GN SWXT 2	50	mm	115,5	58,5	350	97,85	14	117	117	300	193	50	61,2	M6	F05	50	17	kg 18,328
		inch	4,55	2,30	13,78	3,85	0,55	4,61	4,61	11,81	7,60	1,97	2,41			1,97	0,67	0,67 40,41

**(POM SEAL)**

GN SW EXTRALONG PN

		CS Carbon Steel	SS Stainless Steel	
DN	PN	ITEM CODE		
6	MPa 50 Psi 7250	GN2TXT15024A000	GN2TXT15044A000	
10	MPa 50 Psi 7250	GN2TXT25024A000	GN2TXT25044A000	
13	MPa 50 Psi 7250	GN2TXT35024A000	GN2TXT35044A000	
20	MPa 40 Psi 5800	GN2TXT44024A000	GN2TXT44044A000	
25	MPa 35 Psi 5075	GN2TXT53024A000	GN2TXT53044A000	
32	MPa 35 Psi 5075	GN2TXT63024A000	GN2TXT63044A000	
40	MPa 35 Psi 5075	GN2TXT73024A000	GN2TXT73044A000	
50	MPa 35 Psi 5075	GN2TXT83024A000	GN2TXT83044A000	

**(PEEK SEAL)**

GN SW EXTRALONG PN

		CS Carbon Steel	SS Stainless Steel	
DN	PN	ITEM CODE		
6	MPa 50 Psi 7250	GN2TXT15024P000	GN2TXT15044P000	
10	MPa 50 Psi 7250	GN2TXT25024P000	GN2TXT25044P000	
13	MPa 50 Psi 7250	GN2TXT35024P000	GN2TXT35044P000	
20	MPa 42 Psi 6090	GN2TXT44024P000	GN2TXT44044P000	
25	MPa 42 Psi 6090	GN2TXT53024P000	GN2TXT53044P000	
32	MPa 35 Psi 5075	GN2TXT63024P000	GN2TXT63044P000	
40	MPa 35 Psi 5075	GN2TXT73024P000	GN2TXT73044P000	
50	MPa 35 Psi 5075	GN2TXT83024P000	GN2TXT83044P000	

**(POM SEAL)**


GN SW EXTRALONG S6000

		CS Carbon Steel	SS Stainless Steel	
DN	PN	ITEM CODE		
6	MPa 41,4 Psi 6000	GN2TXT1G024A000	GN2TXT1G044A000	
10	MPa 41,4 Psi 6000	GN2TXT2G024A000	GN2TXT2G044A000	
13	MPa 41,4 Psi 6000	GN2TXT3G024A000	GN2TXT3G044A000	
20	MPa 41,4 Psi 6000	GN2TXT4G024A000	GN2TXT4G044A000	
25	MPa 41,4 Psi 6000	GN2TXT5G024A000	GN2TXT5G044A000	
32	MPa 41,4 Psi 6000	GN2TXT6G024A000	GN2TXT6G044A000	
40	MPa 41,4 Psi 6000	GN2TXT7G024A000	GN2TXT7G044A000	
50	MPa 41,4 Psi 6000	GN2TXT8G024A000	GN2TXT8G044A000	

**(PEEK SEAL)**

GN SW EXTRALONG S6000

		CS Carbon Steel	SS Stainless Steel	
DN	PN	ITEM CODE		
6	MPa 41,4 Psi 6000	GN2TXT1G024P000	GN2TXT1G044P000	
10	MPa 41,4 Psi 6000	GN2TXT2G024P000	GN2TXT2G044P000	
13	MPa 41,4 Psi 6000	GN2TXT3G024P000	GN2TXT3G044P000	
20	MPa 41,4 Psi 6000	GN2TXT4G024P000	GN2TXT4G044P000	
25	MPa 41,4 Psi 6000	GN2TXT5G024P000	GN2TXT5G044P000	
32	MPa 41,4 Psi 6000	GN2TXT6G024P000	GN2TXT6G044P000	
40	MPa 41,4 Psi 6000	GN2TXT7G024P000	GN2TXT7G044P000	
50	MPa 41,4 Psi 6000	GN2TXT8G024P000	GN2TXT8G044P000	

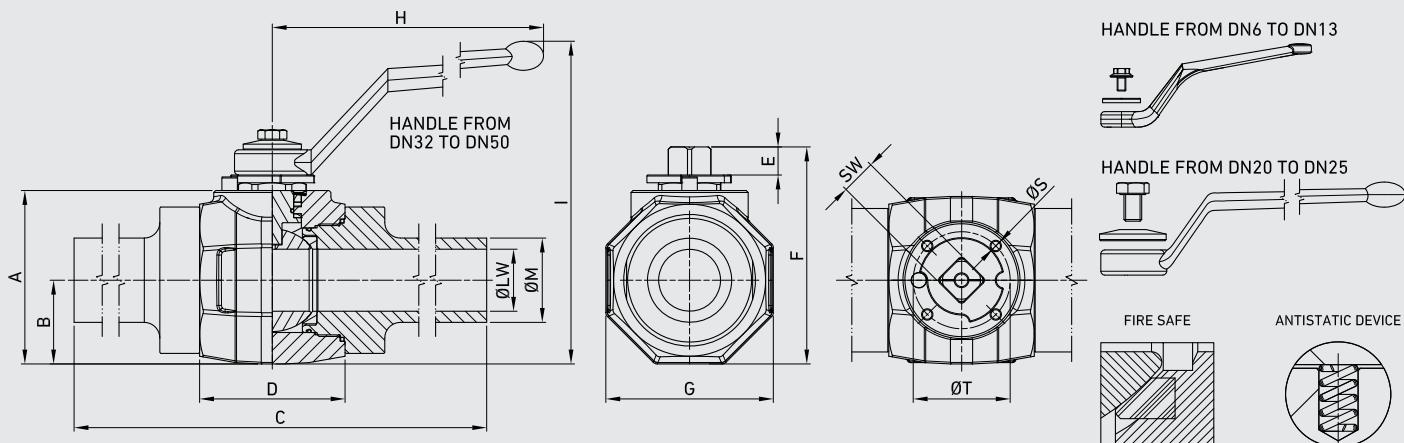

## ■ GN PE

TYPE	DN	A	B	C	D	E	F	ØG*	H	I	ØLW	LSCH80	ØM	ØS	ISO 5211	ØT	SW	WEIGHT	
GN PE 114	6	mm	53	27	272	44	10	70	54	110	109	6	3,02	13,7	M5	F03	36	9	kg 1,227
		inch	2,09	1,06	10,71	1,73	0,39	2,76	2,13	4,33	4,29	0,24	0,12	0,54			1,42	0,35	0,35 2,71
GN PE 318	10	mm	53	27	272	44	10	70	54	110	109	10	3,2	17,1	M5	F03	36	9	kg 1,27
		inch	2,09	1,06	10,71	1,73	0,39	2,76	2,13	4,33	4,29	0,39	0,13	0,67			1,42	0,35	0,35 2,80
GN PE 112	13	mm	58	29,5	281	48	10	75,5	59	110	114	13	3,73	21,3	M5	F03	36	9	kg 1,709
		inch	2,28	1,16	11,06	1,89	0,39	2,97	2,32	4,33	4,49	0,51	0,15	0,84			1,42	0,35	0,35 3,77
GN PE 3t4	20	mm	72,6	37	298	62	14	95,5	74	200	128	20	3,91	26,7	M6	F05	50	14	kg 3,159
		inch	2,86	1,46	11,73	2,44	0,55	3,76	2,91	7,87	5,04	0,79	0,15	1,05			1,97	0,55	0,55 6,96
GN PE 1	25	mm	81	41,5	306	66	14	104	83	200	137	25	4,55	33,4	M6	F05	50	14	kg 4,224
		inch	3,19	1,63	12,05	2,60	0,55	4,09	3,27	7,87	5,39	0,98	0,18	1,31			1,97	0,55	0,55 9,31
GN PE 1 114	32	mm	89	42,5	327	75	14	112	85	300	166	32	4,85	42,2	M6	F05	50	17	kg 4,751
		inch	3,50	1,67	12,87	2,95	0,55	4,41	3,35	11,81	6,54	1,26	0,19	1,66			1,97	0,67	0,67 10,47
GN PE 1 112	40	mm	106	52,5	335	85	14	105	105	300	184	40	5,08	48,3	M6	F05	50	17	kg 8,306
		inch	4,17	2,07	13,19	3,35	0,55	4,13	4,13	11,81	7,24	1,57	0,20	1,90			1,97	0,67	0,67 18,31
GN PE2	50	mm	115,5	58,5	360	97,85	14	117	117	300	193	50	5,54	60,3	M6	F05	50	17	kg 11,402
		inch	4,55	2,30	14,17	3,85	0,55	4,61	4,61	11,81	7,60	1,97	0,22	2,37			1,97	0,67	0,67 25,14

**(POM SEAL)**

GN PE PN

		CS Carbon Steel	SS Stainless Steel	
DN	PN	ITEM CODE		
6	MPa 50 Psi 7250	GN2BWT15024A000	GN2BWT15044A000	
10	MPa 50 Psi 7250	GN2BWT25024A000	GN2BWT25044A000	
13	MPa 50 Psi 7250	GN2BWT35024A000	GN2BWT35044A000	
20	MPa 40 Psi 5800	GN2BWT44024A000	GN2BWT44044A000	
25	MPa 35 Psi 5075	GN2BWT53024A000	GN2BWT53044A000	
32	MPa 35 Psi 5075	GN2BWT63024A000	GN2BWT63044A000	
40	MPa 35 Psi 5075	GN2BWT73024A000	GN2BWT73044A000	
50	MPa 35 Psi 5075	GN2BWT83024A000	GN2BWT83044A000	

**(PEEK SEAL)**

GN PE PN

		CS Carbon Steel	SS Stainless Steel	
DN	PN	ITEM CODE		
6	MPa 50 Psi 7250	GN2BWT15024P000	GN2BWT15044P000	
10	MPa 50 Psi 7250	GN2BWT25024P000	GN2BWT25044P000	
13	MPa 50 Psi 7250	GN2BWT35024P000	GN2BWT35044P000	
20	MPa 42 Psi 6090	GN2BWT44024P000	GN2BWT44044P000	
25	MPa 42 Psi 6090	GN2BWT53024P000	GN2BWT53044P000	
32	MPa 35 Psi 5075	GN2BWT63024P000	GN2BWT63044P000	
40	MPa 35 Psi 5075	GN2BWT73024P000	GN2BWT73044P000	
50	MPa 35 Psi 5075	GN2BWT83024P000	GN2BWT83044P000	

**(POM SEAL)**

GN PE S6000

		CS Carbon Steel	SS Stainless Steel	
DN	PN	ITEM CODE		
6	MPa 41,4 Psi 6000	GN2BWTG1024A000	GN2BWTG1044A000	
10	MPa 41,4 Psi 6000	GN2BWT2G024A000	GN2BWT2G044A000	
13	MPa 41,4 Psi 6000	GN2BWT3G024A000	GN2BWT3G044A000	
20	MPa 41,4 Psi 6000	GN2BWT4G024A000	GN2BWT4G044A000	
25	MPa 41,4 Psi 6000	GN2BWT5G024A000	GN2BWT5G044A000	
32	MPa 41,4 Psi 6000	GN2BWT6G024A000	GN2BWT6G044A000	
40	MPa 41,4 Psi 6000	GN2BWT7G024A000	GN2BWT7G044A000	
50	MPa 41,4 Psi 6000	GN2BWT8G024A000	GN2BWT8G044A000	

**(PEEK SEAL)**

GN PE S6000

		CS Carbon Steel	SS Stainless Steel	
DN	PN	ITEM CODE		
6	MPa 41,4 Psi 6000	GN2BWT1G024P000	GN2BWT1G044P000	
10	MPa 41,4 Psi 6000	GN2BWT2G024P000	GN2BWT2G044P000	
13	MPa 41,4 Psi 6000	GN2BWT3G024P000	GN2BWT3G044P000	
20	MPa 41,4 Psi 6000	GN2BWT4G024P000	GN2BWT4G044P000	
25	MPa 41,4 Psi 6000	GN2BWT5G024P000	GN2BWT5G044P000	
32	MPa 41,4 Psi 6000	GN2BWT6G024P000	GN2BWT6G044P000	
40	MPa 41,4 Psi 6000	GN2BWT7G024P000	GN2BWT7G044P000	
50	MPa 41,4 Psi 6000	GN2BWT8G024P000	GN2BWT8G044P000	



GM

2-WAY HIGH PRESSURE  
BALL VALVES

Edition. 21.0


## CS Carbon Steel

- Type: ball valve 2way
- Sizes: from DN6 up to DN100
- Ends: BSP-NPT-SW-SWXT -PE BW
- Pressure: up to PN500 / S3000
- Temp range: from -46°C to +250°C

## SS Stainless Steel

- Type: ball valve 2way
- Sizes: from DN6 up to DN100
- Ends: BSP-NPT-SW-SWXT -PE BW
- Pressure: up to PN500 / S3000
- Temp range: from -30°C to +100°C

## STANDARD COMPOSITION OF VALVE

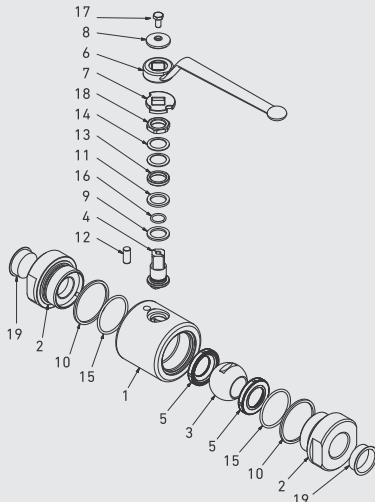

POS	DESCRIPTION	Q.TY	CS	SS	CS	SS
			Carbon Steel	Stainless Steel	Carbon Steel	Stainless Steel
MATERIAL						
1	Body	1	ASTM A105	ASTM A182 F316	11	PTFE
2	Adapter	2	ASTM A105	ASTM A182 F316	12	AISI 316
3	Ball	1	ASTM A479 Tp.316	ASTM A479 Tp.316	13	AISI 316
4	Stem	1	ASTM A479 Tp.316	ASTM A479 Tp.316	14	AISI 316
5	Ball Seat	2	POM	POM	15	NBR
6	Handle	1	Fe37	Fe37	16	NBR
7	Washer	1	AISI 316	AISI 316	17	ISO4762 A4
8	Washer	1	AISI 316	AISI 316	18	AISI 316
9	Body ring	1	Graphite	Graphite	19	PVC
10	Adapter ring	2	Graphite	Graphite		



## CODE DESCRIPTION STRUCTURE

GM	G 1 1/2	DN13	A105	F316	POM	B
----	---------	------	------	------	-----	---

Type and way of valve \_\_\_\_\_

GM 2-way

Ends \_\_\_\_\_

GAS DIN/	NPT ANSI	SW
ISO 228	/ASME	
BSP	B1.20.1	
G 1/4	N 1/4	SW 1/4
G 3/8	N 3/8	SW 3/8
G 1/2	N 1/2	SW 1/2
G 3/4	N 3/4	SW 3/4
G 1	N 1	SW 1
G 1 1/4	N 1 1/4	SW 1 1/4
G 1 1/2	N 1 1/2	SW 1 1/2
G 2	N 2	SW 2
G 2 1/2	N 2 1/2	SW 2 1/2
G 3	N 3	SW 3
G 4	N 4	SW 4

Sizes \_\_\_\_\_

DN6	DN40
DN10	DN50
DN13	DN65
DN20	DN80
DN25	DN100
DN32	

Body and adapter material \_\_\_\_\_

- A105 LF2
- F316

Stem and ball material \_\_\_\_\_

- F316
- F316

Ball seat material \_\_\_\_\_

A = POM D = PEEK\* C = PTFE\*

Adapter and stem seal material \_\_\_\_\_


B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request




- Reduced bore
- Special threads
- Pressure class up to PN500 or 3000 Psi
- Locking device
- PE and SW extralong ends

For further special requests please consult our technical/commercial service.



HANDLE FROM DN6 TO DN13




HANDLE FROM DN32 TO DN50

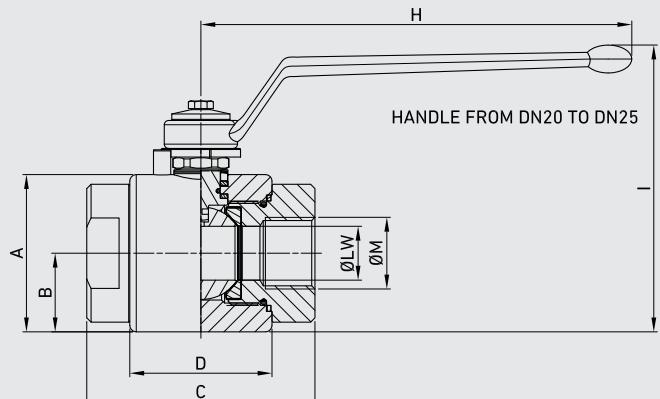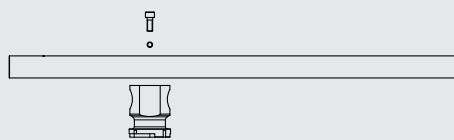HANDLE FROM DN65 TO DN100  
TOTAL LENGTH 650


HANDLE FROM DN20 TO DN25

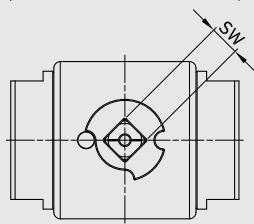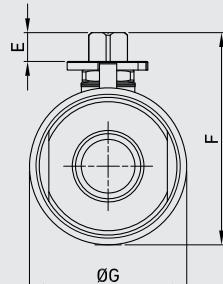

FIRE SAFE



ANTISTATIC DEVICE



## ■ GM DIN/ISO 228 BSP

TYPE	DN	A	B	C	D	E	F	ØG*	H	I	ØM	SW	ØLW	WEIGHT
GM G 1/4	6	mm	23,5	72	44	10	66,5	47	110	105	G 1/4	9	6	kg 0,869
		inch	0,93	2,83	1,73	0,39	2,62	1,85	4,33	4,13		0,35	0,24	lb 1,92
GM G 3/8	10	mm	23,5	72	44	10	66,5	47	110	105	G 3/8	9	10	kg 0,844
		inch	0,93	2,83	1,73	0,39	2,62	1,85	4,33	4,13		0,35	0,39	lb 1,86
GM G 1/2	13	mm	26,5	81	48	10,5	72,5	53	110	111	G 1/2	9	13	kg 1,151
		inch	1,04	3,19	1,89	0,41	2,85	2,09	4,33	4,37		0,35	0,51	lb 2,54
GM G 3/4	20	mm	31,5	98	62	14	90	63	200	125	G 3/4	14	20	kg 2,109
		inch	1,24	3,86	2,44	0,55	3,54	2,48	7,87	4,92		0,55	0,79	lb 4,65
GM G 1	25	mm	36,5	106	66	14	99	73	200	133	G 1	14	25	kg 2,872
		inch	1,44	4,17	2,60	0,55	3,90	2,87	7,87	5,24		0,55	0,98	lb 6,33
GM G 1 1/4	32	mm	42	127	83	14	111	84	300	120,5	G 1 1/4	17	32	kg 4,557
		inch	1,65	5,00	3,27	0,55	4,37	3,31	11,81	4,74		0,67	1,26	lb 10,05
GM G 1 1/2	40	mm	49,5	135	89	14	126	99	300	126	G 1 1/2	17	40	kg 6,482
		inch	1,95	5,31	3,50	0,55	4,96	3,90	11,81	4,96		0,67	1,57	lb 14,29
GM G 2	50	mm	56	160	101	14	132	104	300	140,5	G 2	17	50	kg 7,966
		inch	2,20	6,30	3,98	0,55	5,20	4,09	11,81	5,53		0,67	1,97	lb 17,56
GM G 2 1/2	65	mm	140	70	174	105	23,5	176,5	150	600	G 2 1/2	19	65	kg 17,506
		inch	5,51	2,76	6,85	4,13	0,93	6,95	5,91	23,62		0,75	2,56	lb 38,59
GM G 3	80	mm	155	77,5	191,5	114	23,5	191	167	600	G 3	19	80	kg 22,896
		inch	6,10	3,05	7,54	4,49	0,93	7,52	6,57	23,62		0,75	3,15	lb 50,48
GM G 4	100	mm	188	94	230	148	31	231,5	200	600	G 4	24	100	kg 36,999
		inch	7,40	3,70	9,06	5,83	1,22	9,11	7,87	23,62		0,94	3,94	lb 81,57

**(POM SEAL) GM DIN/ISO 228 PN**

		CS Carbon Steel	SS Stainless Steel
DN	PN	ITEM CODE	
6	MPa 50 Psi 7250	GM2GGT15024A000	GM2GGT15044A000
10	MPa 50 Psi 7250	GM2GGT25024A000	GM2GGT25044A000
13	MPa 50 Psi 7250	GM2GGT35024A000	GM2GGT35044A000
20	MPa 40 Psi 5800	GM2GGT44024A000	GM2GGT44044A000
25	MPa 35 Psi 5075	GM2GGT53024A000	GM2GGT53044A000
32	MPa 35 Psi 5075	GM2GGT63024A000	GM2GGT63044A000
40	MPa 35 Psi 5075	GM2GGT73024A000	GM2GGT73044A000
50	MPa 35 Psi 5075	GM2GGT83024A000	GM2GGT83044A000
65	MPa 15 Psi 2175	GM2GGT9C024A000	GM2GGT9C044A000
80	MPa 10 Psi 1450	GM2GGTA1024A000	GM2GGTA1044A000
100	MPa 5 Psi 725	GM2GGTB1024A000	GM2GGTB1044A000

**(PEEK SEAL) GM DIN/ISO 228 PN**

		CS Carbon Steel	SS Stainless Steel
DN	PN	ITEM CODE	
6	MPa 50 Psi 7250	GM2GGT15024P000	GM2GGT15044P000
10	MPa 50 Psi 7250	GM2GGT25024P000	GM2GGT25044P000
13	MPa 50 Psi 7250	GM2GGT35024P000	GM2GGT35044P000
20	MPa 40 Psi 5800	GM2GGT44024P000	GM2GGT44044P000
25	MPa 35 Psi 5075	GM2GGT53024P000	GM2GGT53044P000
32	MPa 35 Psi 5075	GM2GGT63024P000	GM2GGT63044P000
40	MPa 35 Psi 5075	GM2GGT73024P000	GM2GGT73044P000
50	MPa 35 Psi 5075	GM2GGT83024P000	GM2GGT83044P000
65	MPa 15 Psi 2175	GM2GGT9C024P000	GM2GGT9C044P000
80	MPa 10 Psi 1450	GM2GGTA1024P000	GM2GGTA1044P000
100	MPa 5 Psi 725	GM2GGTB1024P000	GM2GGTB1044P000

**(PTFE SEAL) GM DIN/ISO 228 S800**

		CS Carbon Steel	SS Stainless Steel
DN	PN	ITEM CODE	
6	MPa 13,0 Psi 1885	GM2GGT1A024F000	GM2GGT1A044F000
10	MPa 13,0 Psi 1885	GM2GGT2A024F000	GM2GGT2A044F000
13	MPa 13,0 Psi 1885	GM2GGT3A024F000	GM2GGT3A044F000
20	MPa 13,0 Psi 1885	GM2GGT4A024F000	GM2GGT4A044F000
25	MPa 13,0 Psi 1885	GM2GGT5A024F000	GM2GGT5A044F000
32	MPa 10,0 Psi 1450	GM2GGT6A024F000	GM2GGT6A044F000
40	MPa 10,0 Psi 1450	GM2GGT7A024F000	GM2GGT7A044F000
50	MPa 10,0 Psi 1450	GM2GGT8A024F000	GM2GGT8A044F000
65	MPa 10,0 Psi 1450	GM2GGT9A024F000	GM2GGT9A044F000
80	MPa 10,0 Psi 1450	GM2GGTAA024F000	GM2GGTAA044F000
100	MPa 5,0 Psi 725	GM2GGTBA024F000	GM2GGTBA044F000


**(POM SEAL) GM DIN/ISO 228 S3000**

		CS Carbon Steel	SS Stainless Steel
DN	PN	ITEM CODE	
6	MPa 20,7 Psi 3000	GM2GGT1F024A000	GM2GGT1F044A000
10	MPa 20,7 Psi 3000	GM2GGT2F024A000	GM2GGT2F044A000
13	MPa 20,7 Psi 3000	GM2GGT3F024A000	GM2GGT3F044A000
20	MPa 20,7 Psi 3000	GM2GGT4F024A000	GM2GGT4F044A000
25	MPa 20,7 Psi 3000	GM2GGT5F024A000	GM2GGT5F044A000
32	MPa 20,7 Psi 3000	GM2GGT6F024A000	GM2GGT6F044A000
40	MPa 20,7 Psi 3000	GM2GGT17F024A000	GM2GGT17F044A000
50	MPa 20,7 Psi 3000	GM2GGT8F024A000	GM2GGTBF044A000
65	MPa 15 Psi 3000	GM2GGT9F024A000	GM2GGT9F044A000
80	MPa 10 Psi 3000	GM2GGTAF024A000	GM2GGTAF044A000
100	MPa 5 Psi 3000	GM2GGTBF024A000	GM2GGTBF044A000




**(PEEK SEAL) GM DIN/ISO 228 S3000**

		CS Carbon Steel	SS Stainless Steel
DN	PN	ITEM CODE	
6	MPa 20,7 Psi 3000	GM2GGT1F024P000	GM2GGT1F044P000
10	MPa 20,7 Psi 3000	GM2GGT2F024P000	GM2GGT2F044P000
13	MPa 20,7 Psi 3000	GM2GGT3F024P000	GM2GGT3F044P000
20	MPa 20,7 Psi 3000	GM2GGT4F024P000	GM2GGT4F044P000
25	MPa 20,7 Psi 3000	GM2GGT5F024P000	GM2GGT5F044P000
32	MPa 20,7 Psi 3000	GM2GGT6F024P000	GM2GGT6F044P000
40	MPa 20,7 Psi 3000	GM2GGT17F024P000	GM2GGT7F044P000
50	MPa 20,7 Psi 3000	GM2GGT8F024P000	GM2GGT8F044P000
65	MPa 15 Psi 3000	GM2GGT9F024P000	GM2GGT9F044P000
80	MPa 10 Psi 3000	GM2GGTAF024P000	GM2GGTAF044P000
100	MPa 5 Psi 3000	GM2GGTBF024P000	GM2GGTBF044P000



HANDLE FROM DN6 TO DN13




HANDLE FROM DN32 TO DN50

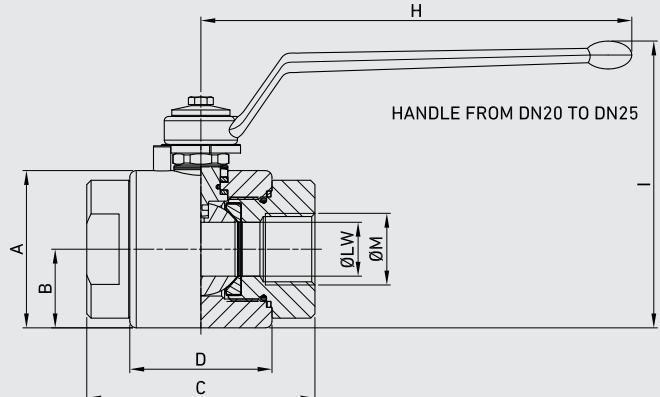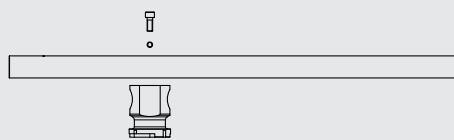HANDLE FROM DN65 TO DN100  
TOTAL LENGTH 650


HANDLE FROM DN20 TO DN25

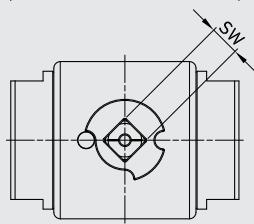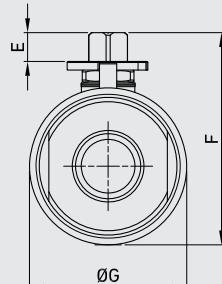

FIRE SAFE



ANTISTATIC DEVICE



## GM ANSI/ASME B1.20.1 NPT

TYPE	DN	A	B	C	D	E	F	Ø*	H	I	ØM	SW	ØLW	WEIGHT
GM N 1/4	6	mm	23,5	72	44	10	66,5	47	110	105	N 1/4	9	6	kg 0,869
		inch	0,93	2,83	1,73	0,39	2,62	1,85	4,33	4,13		0,35	0,24	lb 1,92
GM N 3/8	10	mm	23,5	72	44	10	66,5	47	110	105	N 3/8	9	10	kg 0,844
		inch	0,93	2,83	1,73	0,39	2,62	1,85	4,33	4,13		0,35	0,39	lb 1,86
GM N 1/2	13	mm	26,5	81	48	10,5	72,5	53	110	111	N 1/2	9	13	kg 1,151
		inch	1,04	3,19	1,89	0,41	2,85	2,09	4,33	4,37		0,35	0,51	lb 2,54
GM N 3/4	20	mm	31,5	98	62	14	90	63	200	125	N 3/4	14	20	kg 2,109
		inch	1,24	3,86	2,44	0,55	3,54	2,48	7,87	4,92		0,55	0,79	lb 4,65
GM N 1	25	mm	36,5	106	66	14	99	73	200	133	N 1	14	25	kg 2,872
		inch	1,44	4,17	2,60	0,55	3,90	2,87	7,87	5,24		0,55	0,98	lb 6,33
GM N 1 1/4	32	mm	42	127	83	14	111	84	300	120,5	N 1 1/4	17	32	kg 4,557
		inch	1,65	5,00	3,27	0,55	4,37	3,31	11,81	4,74		0,67	1,26	lb 10,05
GM N 1 1/2	40	mm	49,5	135	89	14	126	99	300	126	N 1 1/2	17	40	kg 6,482
		inch	1,95	5,31	3,50	0,55	4,96	3,90	11,81	4,96		0,67	1,57	lb 14,29
GM N 2	50	mm	56	160	101	14	132	104	300	140,5	N 2	17	50	kg 7,966
		inch	2,20	6,30	3,98	0,55	5,20	4,09	11,81	5,53		0,67	1,97	lb 17,56
GM N 2 1/2	65	mm	140	70	174	105	23,5	176,5	150	600	N 2 1/2	19	65	kg 17,506
		inch	5,51	2,76	6,85	4,13	0,93	6,95	5,91	23,62		0,75	2,56	lb 38,59
GM N 3	80	mm	155	77,5	191,5	114	23,5	191	167	600	N 3	19	80	kg 22,896
		inch	6,10	3,05	7,54	4,49	0,93	7,52	6,57	23,62		0,75	3,15	lb 50,48
GM N 4	100	mm	188	94	230	148	31	231,5	200	600	N 4	24	100	kg 36,999
		inch	7,40	3,70	9,06	5,83	1,22	9,11	7,87	23,62		0,94	3,94	lb 81,57

**(POM SEAL) GM ANSI/ASME B1.20.1 NPT PN**

		<b>CS</b> Carbon Steel	<b>SS</b> Stainless Steel
<b>DN</b>	<b>PN</b>	<b>ITEM CODE</b>	
6	MPa 50 Psi 7250	GM2NNT15024A000	GM2NNT15044A000
10	MPa 50 Psi 7250	GM2NNT25024A000	GM2NNT25044A000
13	MPa 50 Psi 7250	GM2NNT35024A000	GM2NNT35044A000
20	MPa 40 Psi 5800	GM2NNT44024A000	GM2NNT44044A000
25	MPa 35 Psi 5075	GM2NNT53024A000	GM2NNT53044A000
32	MPa 35 Psi 5075	GM2NNT63024A000	GM2NNT63044A000
40	MPa 35 Psi 5075	GM2NN173024A000	GM2NN173044A000
50	MPa 35 Psi 5075	GM2NNT83024A000	GM2NNT83044A000
65	MPa 15 Psi 2175	GM2NNT9C024A000	GM2NNT9C044A000
80	MPa 10 Psi 1450	GM2NNTA1024A000	GM2NNTA1044A000
100	MPa 5 Psi 725	GM2NNTBI024A000	GM2NNTBI044A000

**(PEEK SEAL) GM ANSI/ASME B1.20.1 NPT PN**

		<b>CS</b> Carbon Steel	<b>SS</b> Stainless Steel
<b>DN</b>	<b>PN</b>	<b>ITEM CODE</b>	
6	MPa 50 Psi 7250	GM2NNT15024P000	GM2NNT15044P000
10	MPa 50 Psi 7250	GM2NNT25024P000	GM2NNT25044P000
13	MPa 50 Psi 7250	GM2NNT35024P000	GM2NNT35044P000
20	MPa 40 Psi 5800	GM2NNT44024P000	GM2NNT44044P000
25	MPa 35 Psi 5075	GM2NNT53024P000	GM2NNT53044P000
32	MPa 35 Psi 5075	GM2NNT63024P000	GM2NNT63044P000
40	MPa 35 Psi 5075	GM2NN173024P000	GM2NN173044P000
50	MPa 35 Psi 5075	GM2NNT83024P000	GM2NNT83044P000
65	MPa 15 Psi 2175	GM2NNT9C024P000	GM2NNT9C044P000
80	MPa 10 Psi 1450	GM2NNTA1024P000	GM2NNTA1044P000
100	MPa 5 Psi 725	GM2NNTBI024P000	GM2NNTBI044P000

**(PTFE SEAL) GM ANSI/ASME B1.20.1 NPT S800**

		<b>CS</b> Carbon Steel	<b>SS</b> Stainless Steel
<b>DN</b>	<b>PN</b>	<b>ITEM CODE</b>	
6	MPa 13,0 Psi 1885	GM2NNT1A024F000	GM2NNT1A044F000
10	MPa 13,0 Psi 1885	GM2NNT2A024F000	GM2NNT2A044F000
13	MPa 13,0 Psi 1885	GM2NNT3A024F000	GM2NNT3A044F000
20	MPa 13,0 Psi 1885	GM2NNT4A024F000	GM2NNT4A044F000
25	MPa 13,0 Psi 1885	GM2NNT5A024F000	GM2NNT5A044F000
32	MPa 10,0 Psi 1450	GM2NNT6A024F000	GM2NNT6A044F000
40	MPa 10,0 Psi 1450	GM2NN17A024F000	GM2NN17A044F000
50	MPa 10,0 Psi 1450	GM2NNTBA024F000	GM2NNTBA044F000
65	MPa 10,0 Psi 1450	GM2NNT9A024F000	GM2NNT9A044F000
80	MPa 10,0 Psi 1450	GM2NNTAA024F000	GM2NNTAA044F000
100	MPa 5,0 Psi 725	GM2NNTBA024F000	GM2NNTBA044F000


**(POM SEAL) GM ANSI/ASME B1.20.1 NPT S3000**

		<b>CS</b> Carbon Steel	<b>SS</b> Stainless Steel
<b>DN</b>	<b>PN</b>	<b>ITEM CODE</b>	
6	MPa 20,7 Psi 3000	GM2NNT1F024A000	GM2NNT1F044A000
10	MPa 20,7 Psi 3000	GM2NNT2F024A000	GM2NNT2F044A000
13	MPa 20,7 Psi 3000	GM2NNT3F024A000	GM2NNT3F044A000
20	MPa 20,7 Psi 3000	GM2NNT4F024A000	GM2NNT4F044A000
25	MPa 20,7 Psi 3000	GM2NNT5F024A000	GM2NNT5F044A000
32	MPa 20,7 Psi 3000	GM2NNT6F024A000	GM2NNT6F044A000
40	MPa 20,7 Psi 3000	GM2NN17F024A000	GM2NN17F044A000
50	MPa 20,7 Psi 3000	GM2NNTBF024A000	GM2NNTBF044A000
65	MPa 15 Psi 3000	GM2NNT9F024A000	GM2NNT9F044A000
80	MPa 10 Psi 3000	GM2NNTAF024A000	GM2NNTAF044A000
100	MPa 5 Psi 3000	GM2NNTBF024A000	GM2NNTBF044A000




**(PEEK SEAL) GM ANSI/ASME B1.20.1 NPT S3000**

		<b>CS</b> Carbon Steel	<b>SS</b> Stainless Steel
<b>DN</b>	<b>PN</b>	<b>ITEM CODE</b>	
6	MPa 20,7 Psi 3000	GM2NNT1F024P000	GM2NNT1F044P000
10	MPa 20,7 Psi 3000	GM2NNT2F024P000	GM2NNT2F044P000
13	MPa 20,7 Psi 3000	GM2NNT3F024P000	GM2NNT3F044P000
20	MPa 20,7 Psi 3000	GM2NNT4F024P000	GM2NNT4F044P000
25	MPa 20,7 Psi 3000	GM2NNT5F024P000	GM2NNT5F044P000
32	MPa 20,7 Psi 3000	GM2NNT6F024P000	GM2NNT6F044P000
40	MPa 20,7 Psi 3000	GM2NN17F024P000	GM2NN17F044P000
50	MPa 20,7 Psi 3000	GM2NNTBF024P000	GM2NNTBF044P000
65	MPa 15 Psi 3000	GM2NNT9F024P000	GM2NNT9F044P000
80	MPa 10 Psi 3000	GM2NNTAF024P000	GM2NNTAF044P000
100	MPa 5 Psi 3000	GM2NNTBF024P000	GM2NNTBF044P000



HANDLE FROM DN6 TO DN13




HANDLE FROM DN32 TO DN50

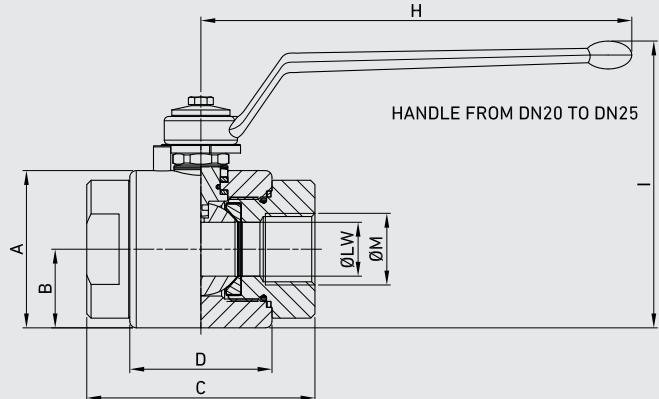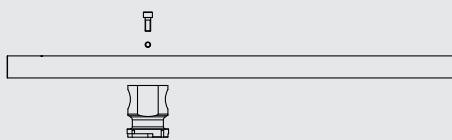HANDLE FROM DN65 TO DN100  
TOTAL LENGTH 650


HANDLE FROM DN20 TO DN25

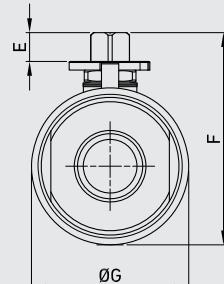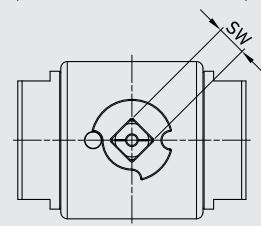

FIRE SAFE



ANTISTATIC DEVICE



## GM SW

TYPE	DN	A	B	C	D	E	F	ØG*	H	I	ØM	SW	ØLW	WEIGHT
GM SW 1/4	6	mm	23,5	72	44	10	66,5	47	110	105	N 1/4	9	6	kg 0,869
		inch	0,93	2,83	1,73	0,39	2,62	1,85	4,33	4,13		0,35	0,24	lb 1,92
GM SW 3/8	10	mm	23,5	72	44	10	66,5	47	110	105	N 3/8	9	10	kg 0,844
		inch	0,93	2,83	1,73	0,39	2,62	1,85	4,33	4,13		0,35	0,39	lb 1,86
GM SW 1/2	13	mm	26,5	81	48	10,5	72,5	53	110	111	N 1/2	9	13	kg 1,151
		inch	1,04	3,19	1,89	0,41	2,85	2,09	4,33	4,37		0,35	0,51	lb 2,54
GM SW 3/4	20	mm	31,5	98	62	14	90	63	200	125	N 3/4	14	20	kg 2,109
		inch	1,24	3,86	2,44	0,55	3,54	2,48	7,87	4,92		0,55	0,79	lb 4,65
GMSW 1	25	mm	36,5	106	66	14	99	73	200	133	N 1	14	25	kg 2,872
		inch	1,44	4,17	2,60	0,55	3,90	2,87	7,87	5,24		0,55	0,98	lb 6,33
GM SW 1 1/4	32	mm	42	127	83	14	111	84	300	120,5	N 1 1/4	17	32	kg 4,557
		inch	1,65	5,00	3,27	0,55	4,37	3,31	11,81	4,74		0,67	1,26	lb 10,05
GM SW 1 1/2	40	mm	49,5	135	89	14	126	99	300	126	N 1 1/2	17	40	kg 6,482
		inch	1,95	5,31	3,50	0,55	4,96	3,90	11,81	4,96		0,67	1,57	lb 14,29
GM SW 2	50	mm	56	160	101	14	132	104	300	140,5	N 2	17	50	kg 7,966
		inch	2,20	6,30	3,98	0,55	5,20	4,09	11,81	5,53		0,67	1,97	lb 17,56
GM SW 2 1/2	65	mm	140	70	174	105	23,5	176,5	150	600	N 2 1/2	19	65	kg 17,506
		inch	5,51	2,76	6,85	4,13	0,93	6,95	5,91	23,62		0,75	2,56	lb 38,59
GM SW 3	80	mm	155	77,5	191,5	114	23,5	191	167	600	N 3	19	80	kg 22,896
		inch	6,10	3,05	7,54	4,49	0,93	7,52	6,57	23,62		0,75	3,15	lb 50,48
GM SW 4	100	mm	188	94	230	148	31	231,5	200	600	N 4	24	100	kg 36,999
		inch	7,40	3,70	9,06	5,83	1,22	9,11	7,87	23,62		0,94	3,94	lb 81,57

## ■ (POM SEAL) GM SW PN

		CS Carbon Steel	SS Stainless Steel
DN	PN	ITEM CODE	
6	MPa 50 Psi 7250	GM2TTT15024A000	GM2TTT15044A000
10	MPa 50 Psi 7250	GM2TTT25024A000	GM2TTT25044A000
13	MPa 50 Psi 7250	GM2TTT35024A000	GM2TTT35044A000
20	MPa 40 Psi 5800	GM2TTT44024A000	GM2TTT44044A000
25	MPa 35 Psi 5075	GM2TTT53024A000	GM2TTT53044A000
32	MPa 35 Psi 5075	GM2TTT63024A000	GM2TTT63044A000
40	MPa 35 Psi 5075	GM2TTT73024A000	GM2TTT73044A000
50	MPa 35 Psi 5075	GM2TTT83024A000	GM2TTT83044A000
65	MPa 15 Psi 2175	GM2TTT9C024A000	GM2TTT9C044A000
80	MPa 10 Psi 1450	GM2TTTA1024A000	GM2TTTA1044A000
100	MPa 5 Psi 725	GM2TTTB1024A000	GM2TTTB1044A000

## ■ (PEEK SEAL) GM SW PN

		CS Carbon Steel	SS Stainless Steel
DN	PN	ITEM CODE	
6	MPa 50 Psi 7250	GM2TTT15024P000	GM2TTT15044P000
10	MPa 50 Psi 7250	GM2TTT25024P000	GM2TTT25044P000
13	MPa 50 Psi 7250	GM2TTT35024P000	GM2TTT35044P000
20	MPa 40 Psi 5800	GM2TTT44024P000	GM2TTT44044P000
25	MPa 35 Psi 5075	GM2TTT53024P000	GM2TTT53044P000
32	MPa 35 Psi 5075	GM2TTT63024P000	GM2TTT63044P000
40	MPa 35 Psi 5075	GM2TTT73024P000	GM2TTT73044P000
50	MPa 35 Psi 5075	GM2TTT83024P000	GM2TTT83044P000
65	MPa 15 Psi 2175	GM2TTT9C024P000	GM2TTT9C044P000
80	MPa 10 Psi 1450	GM2TTTA1024P000	GM2TTTA1044P000
100	MPa 5 Psi 725	GM2TTTB1024P000	GM2TTTB1044P000

## ■ (PTFE SEAL) GM SW S800

		CS Carbon Steel	SS Stainless Steel
DN	PN	ITEM CODE	
6	MPa 13,0 Psi 1885	GM2TTT1A024F000	GM2TTT1A044F000
10	MPa 13,0 Psi 1885	GM2TTT2A024F000	GM2TTT2A044F000
13	MPa 13,0 Psi 1885	GM2TTT3A024F000	GM2TTT3A044F000
20	MPa 13,0 Psi 1885	GM2TTT4A024F000	GM2TTT4A044F000
25	MPa 13,0 Psi 1885	GM2TTT5A024F000	GM2TTT5A044F000
32	MPa 13,0 Psi 1885	GM2TTT6A024F000	GM2TTT6A044F000
40	MPa 13,0 Psi 1885	GM2TTT7A024F000	GM2TTT7A044F000
50	MPa 13,0 Psi 1885	GM2TTT8A024F000	GM2TTT8A044F000

## ■ (POM SEAL) GM SW S3000

		CS Carbon Steel	SS Stainless Steel
DN	PN	ITEM CODE	
6	MPa 20,7 Psi 3000	GM2TTT1F024A000	GM2TTT1F044A000
10	MPa 20,7 Psi 3000	GM2TTT2F024A000	GM2TTT2F044A000
13	MPa 20,7 Psi 3000	GM2TTT3F024A000	GM2TTT3F044A000
20	MPa 20,7 Psi 3000	GM2TTT4F024A000	GM2TTT4F044A000
25	MPa 20,7 Psi 3000	GM2TTT5F024A000	GM2TTT5F044A000
32	MPa 20,7 Psi 3000	GM2TTT6F024A000	GM2TTT6F044A000
40	MPa 20,7 Psi 3000	GM2TTT7F024A000	GM2TTT7F044A000
50	MPa 20,7 Psi 3000	GM2TTT8F024A000	GM2TTT8F044A000
65	MPa 15 Psi 3000	GM2TTT9F024A000	GM2TTT9F044A000
80	MPa 10 Psi 3000	GM2TTTAF024A000	GM2TTTAF044A000
100	MPa 5 Psi 3000	GM2TTTBFI024A000	GM2TTTBFI044A000

## ■ (PEEK SEAL) GM SW S3000

		CS Carbon Steel	SS Stainless Steel
DN	PN	ITEM CODE	
6	MPa 20,7 Psi 3000	GM2TTT1F024P000	GM2TTT1F044P000
10	MPa 20,7 Psi 3000	GM2TTT2F024P000	GM2TTT2F044P000
13	MPa 20,7 Psi 3000	GM2TTT3F024P000	GM2TTT3F044P000
20	MPa 20,7 Psi 3000	GM2TTT4F024P000	GM2TTT4F044P000
25	MPa 20,7 Psi 3000	GM2TTT5F024P000	GM2TTT5F044P000
32	MPa 20,7 Psi 3000	GM2TTT6F024P000	GM2TTT6F044P000
40	MPa 20,7 Psi 3000	GM2TTT7F024P000	GM2TTT7F044P000
50	MPa 20,7 Psi 3000	GM2TTT8F024P000	GM2TTT8F044P000
65	MPa 15 Psi 3000	GM2TTT9F024P000	GM2TTT9F044P000
80	MPa 10 Psi 3000	GM2TTTAF024P000	GM2TTTAF044P000
100	MPa 5 Psi 3000	GM2TTTBFI024P000	GM2TTTBFI044P000



# ■ SBF-W

## WAFER TYPE BALL VALVES

Edition. 21.0


**CS** Carbon Steel

**SS** Stainless Steel

- **CS, SS, DSS, ALLOY (Forged)**

- Type: ball valve Split Body Floating-Wafer type
- Sizes: from DN13 up to DN150
- Pressure: ANSI150-600
- Temperature: from -50° up to +200° (depending on materials selected)

### ■ STANDARD COMPOSITION OF VALVE

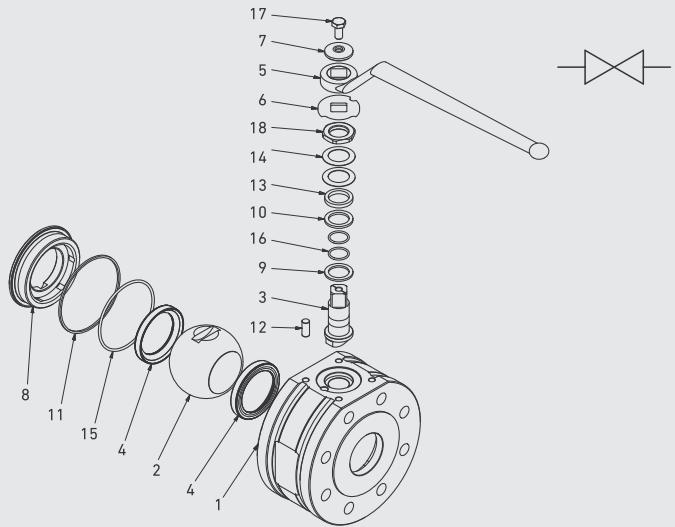

POS	DESCRIPTION	Q.TY	CS	SS
			Carbon Steel	Stainless Steel
1	Body	1	ASTM A350 LF2	ASTM A479 Tp.316
2	Ball	1	ASTM A479 Tp.316	ASTM A479 Tp.316
3	Stem	1	ASTM A479 Tp.316	ASTM A479 Tp.316
4	Ball seat	2	RPTFE	RPTFE
5	Handle	1	Fe37	Fe37
6	Washer	1	AISI 316	AISI 316
7	Washer	1	AISI 316	AISI 316
8	Adapter	1	ASTM A350 LF2	ASTM A479 Tp.316
9	Stem ring	1	PTFE	PTFE
10	Up ring	1	Graphite	Graphite
11	Flange ring	1	Graphite	Graphite
12	Pin	1	AISI 316	AISI 316
13	Press ring	1	AISI 316	AISI 316
14	Spring	2	AISI 316	AISI 316
15	Ring nut o-ring	1	FKM	FKM
16	Stem o-ring	1	FKM	FKM
17	Screw	1	ISO4017 A4	ISO4017 A4
18	Nut	1	AISI 316	AISI 316



## CODE DESCRIPTION STRUCTURE

**SBF-W A150 DN13 LF2 F316 RPTFE FKM**

Type and way of valve \_\_\_\_\_

SBF-W 2-way

Ends \_\_\_\_\_

ASME

B16.5

ANSI150

ANSI300

ANSI600

Sizes \_\_\_\_\_

from DN13 to DN150

Body and adapter material \_\_\_\_\_

● LF2

● F316

Stem and ball material \_\_\_\_\_

● F316

● F316

Ball seat material \_\_\_\_\_

PTFE PEEK\* POM\* DEVLON\*


Adapter and stem seal material \_\_\_\_\_

FKM NBR\* EPDM\* MVQ\*

\*On request

- Reduced bore
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

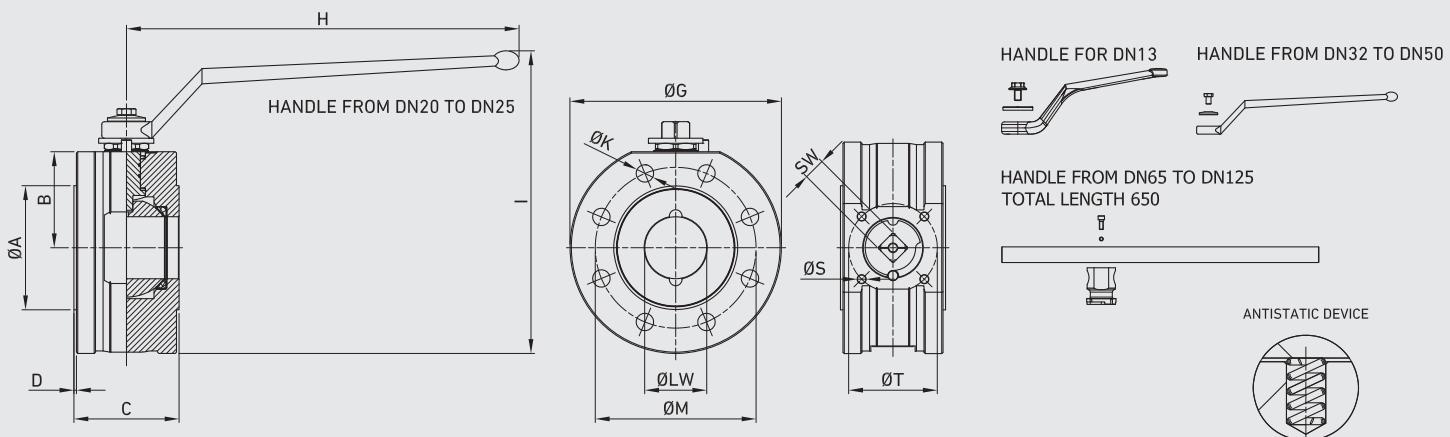

## SBF-W ANSI 150 FB

TYPE	PN	ØE LINEA	ØA	B	C	D	H	I	ØM	ØG	ØK	n°ØK	ØT	ØS	ISO 5211	SW	Ø LW	WEIGHT	ITEM CODE	
																			CS Carbon Steel	SS Stainless Steel
1/2"	MPa 2	mm 90	46	33	36	1,6	110	137	60,3	94	M12	4	36	M5	F03	9	13	kg 1,5	G514404A1505BAA	G514404A2305BAA
	Psi 290	inch 3,54	1,81	1,30	1,42	0,06	4,33	5,39	2,37	3,70		0,16	1,42			0,35	0,51	lb 3,31		
3/4"	MPa 2	mm 100	57	39	48	1,6	200	143	69,9	98	M12	4	36	M5	F03	14	20	kg 2,5	G514405A1505BAA	G514405A2305BAA
	Psi 290	inch 3,94	2,24	1,54	1,89	0,06	7,87	5,63	2,75	3,86		0,16	1,42			0,55	0,79	lb 5,51		
1"	MPa 2	mm 110	64	41,5	48	1,6	200	149	79,4	104	M12	4	50	M6	F05	14	25	kg 4	G514406A1505BAA	G514406A2305BAA
	Psi 290	inch 4,33	2,52	1,63	1,89	0,06	7,87	5,87	3,13	4,09		0,16	1,97			0,55	0,98	lb 8,82		
1-1/4"	MPa 2	mm 115	69	48	53	2	310	183	88,9	118	M12	4	50	M6	F05	17	32	kg 5,2	G514407A1505BAA	G514407A2305BAA
	Psi 290	inch 4,53	2,72	1,89	2,09	0,08	12,20	7,20	3,50	4,65		0,16	1,97			0,67	1,26	lb 11,46		
1-1/2"	MPa 2	mm 125	85	52,5	63	2	310	200	98,4	135	M12	4	70	M8	F07	17	40	kg 7,3	G514408A1505BAA	G514408A2305BAA
	Psi 290	inch 4,92	3,35	2,07	2,48	0,08	12,20	7,87	3,87	5,31		0,16	2,76			0,67	1,57	lb 16,09		
2"	MPa 2	mm 150	98	56	83	2	310	209	120,7	147	M16	4	70	M8	F07	17	49	kg 11,8	G514410A1505BAA	G514410A2305BAA
	Psi 290	inch 5,91	3,86	2,20	3,27	0,08	12,20	8,23	4,75	5,79		0,16	2,76			0,67	1,93	lb 26,01		
2-1/2"	MPa 2	mm 180	122	80	107	2	450	176	139,7	185	M16	4	70	M8	F07	19	63	kg 17,6	G514412A1505BAA	G514412A2305BAA
	Psi 290	inch 7,09	4,80	3,15	4,21	0,08	17,72	6,93	5,50	7,28		0,16	2,76			0,75	2,48	lb 38,80		
3"	MPa 2	mm 190	135	82,5	120	2	450	245	152,4	187	M16	4	70	M8	F07	19	74	kg 25	G514414A1505BAA	G514414A2305BAA
	Psi 290	inch 7,48	5,31	3,25	4,72	0,08	17,72	9,65	6,00	7,36		0,16	2,76			0,75	2,91	lb 55,12		
4"	MPa 2	mm 230	173	113	152	2	450	327	190,5	246	M16	8	102	M10	F10	24	95	kg 38	G514418A1505BAA	G514418A2305BAA
	Psi 290	inch 9,06	6,81	4,45	5,98	0,08	17,72	12,87	7,50	9,69		0,31	4,02			0,94	3,74	lb 83,78		
6"	MPa 2	mm 280	216	156	255	2	-	234,5	241,3	330	M20	8	165	22	F10	Ø 50*	150	kg 132	G514422A1505BAA	G514422A2305BAA
	Psi 290	inch 11,02	8,50	6,14	10,04	0,08	-	9,23	9,50	12,99		0,31	6,50	0,87		Ø 1,97*	5,91	lb 291,01		

\*stem with key

## ■ SBF-W ANSI 300 FB

TYPE	PN	ITEM CODE															
		ØE LINEA	ØA	B	C	D	H	I	ØM	ØG	ØK	n°ØK	ØT	ØS	ISO 5211	SW	Ø LW
1/2"	MPa 5	mm 95	46	33	36	1,6	110	137	66,7	94	M12	4 36	M5	F03	9	13	kg 1,5
	Psi 725	inch 3,74	1,81	1,30	1,42	0,06	4,33	5,39	2,63	3,70		0,16 1,42			0,35	0,51	lb 3,31
3/4"	MPa 5	mm 115	57	39	48	1,6	200	150	82,6	112	M16	4 50	M6	F05	14	20	kg 2,5
	Psi 725	inch 4,53	2,24	1,54	1,89	0,06	7,87	5,91	3,25	4,41		0,16 1,97			0,55	0,79	lb 5,51
1"	MPa 5	mm 125	64	41,5	48	1,6	200	154	88,9	114	M16	4 50	M6	F05	14	25	kg 4,6
	Psi 725	inch 4,92	2,52	1,63	1,89	0,06	7,87	6,06	3,50	4,49		0,16 1,97			0,55	0,98	lb 10,14
1-1/4"	MPa 5	mm 135	69	49	53	2	310	186	98,4	123	M16	4 50	M6	F05	17	32	kg 5,2
	Psi 725	inch 5,31	2,72	1,93	2,09	0,08	12,20	7,32	3,87	4,84		0,16 1,97			0,67	1,26	lb 11,46
1-1/2"	MPa 5	mm 155	85	55	63	2	310	206	114,3	146	M20	4 70	M8	F07	17	40	kg 7,3
	Psi 725	inch 6,10	3,35	2,17	2,48	0,08	12,20	8,11	4,50	5,75		0,16 2,76			0,67	1,57	lb 16,09
2"	MPa 5	mm 165	98	75,8	83	2	310	239	127	167	M16	8 70	M8	F07	17	49	kg 15
	Psi 725	inch 6,50	3,86	2,98	3,27	0,08	12,20	9,41	5,00	6,57		0,31 2,76			0,67	1,93	lb 33,07
2-1/2"	MPa 5	mm 190	122	85	125	2	450	176	149,2	190	M20	8 70	M8	F07	19	63	kg 21
	Psi 725	inch 7,48	4,80	3,35	4,92	0,08	17,72	6,93	5,87	7,48		0,31 2,76			0,75	2,48	lb 46,30
3"	MPa 5	mm 210	142	94	120	2	450	268	168,3	207	M20	8 70	M8	F07	19	74	kg 35
	Psi 725	inch 8,27	5,59	3,70	4,72	0,08	17,72	10,55	6,63	8,15		0,31 2,76			0,75	2,91	lb 77,16
4"	MPa 5	mm 255	173	113	152	2	450	327	200	246	M20	8 102	M10	F10	24	95	kg 58
	Psi 725	inch 10,04	6,81	4,45	5,98	0,08	17,72	12,87	7,87	9,69		0,31 4,02			0,94	3,74	lb 127,87
6"	MPa 5	mm 320	216	156	255	2	-	234,5	269,9	330	M20	12 165	22	F10	Ø 50*	150	kg 132
	Psi 725	inch 12,60	8,50	6,14	10,04	0,08	-	9,23	10,63	12,99		0,47 6,50	0,87		Ø 1,97*	5,91	lb 291,01

\*stem with key

## ■ SBF-W ANSI 600 FB

TYPE	PN	ITEM CODE															
		ØE LINEA	ØA	B	C	D	H	I	ØM	ØG	ØK	n°ØK	ØT	ØS	ISO 5211	SW	Ø LW
1/2"	MPa 10	mm 95	46	33	55	1,6	110	137	66,7	94	M12	4 36	M5	F03	9	13	kg 3
	Psi 1450	inch 3,74	1,81	1,30	2,17	0,06	4,33	5,39	2,63	3,70		0,16 1,42			0,35	0,51	lb 6,61
3/4"	MPa 10	mm 115	57	39	60	1,6	200	150	82,6	114	M16	4 50	M6	F05	14	20	kg 5
	Psi 1450	inch 4,53	2,24	1,54	2,36	0,06	7,87	5,91	3,25	4,49		0,16 1,97			0,55	0,79	lb 11,02
1"	MPa 10	mm 125	64	42	65	1,6	200	160	88,9	124	M16	4 50	M6	F05	14	25	kg 6,5
	Psi 1450	inch 4,92	2,52	1,65	2,56	0,06	7,87	6,30	3,50	4,88		0,16 1,97			0,55	0,98	lb 14,33
1-1/4"	MPa 10	mm 135	69	49	75	2	310	186	98,4	123	M16	4 70	M8	F07	17	32	kg 9
	Psi 1450	inch 5,31	2,72	1,93	2,95	0,08	12,20	7,32	3,87	4,84		0,16 2,76			0,67	1,26	lb 19,84
1-1/2"	MPa 10	mm 155	85	53	85	2	310	206	114,3	146	M20	4 70	M8	F07	17	40	kg 12,4
	Psi 1450	inch 6,10	3,35	2,09	3,35	0,08	12,20	8,11	4,50	5,75		0,16 2,76			0,67	1,57	lb 27,34
2"	MPa 10	mm 165	98	75,8	100	2	310	239	127	167	M16	8 70	M8	F07	17	49	kg 15
	Psi 1450	inch 6,50	3,86	2,98	3,94	0,08	12,20	9,41	5,00	6,57		0,31 2,76			0,67	1,93	lb 33,07
2-1/2"	MPa 10	mm 190	122	85	125	2	450	176	149,2	190	M20	8 70	M8	F07	19	63	kg 21
	Psi 1450	inch 7,48	4,80	3,35	4,92	0,08	17,72	6,93	5,87	7,48		0,31 2,76			0,75	2,48	lb 46,30
3"	MPa 10	mm 210	142	94	150	2	450	268	168,3	207	M20	8 70	M8	F07	19	74	kg 35
	Psi 1450	inch 8,27	5,59	3,70	5,91	0,08	17,72	10,55	6,63	8,15		0,31 2,76			0,75	2,91	lb 77,16
4"	MPa 10	mm 275	173	116	185	2	450	331	215,9	253	M22	8 102	M10	F10	24	95	kg 70
	Psi 1450	inch 10,83	6,81	4,57	7,28	0,08	17,72	13,03	8,50	9,96		0,31 4,02			0,94	3,74	lb 154,32
6"	MPa 10	mm 355	216	156	280	2	-	246,5	292,1	355	M24	12 165	22	F10	Ø 50*	150	kg 174
	Psi 1450	inch 13,98	8,50	6,14	11,02	0,08	-	9,70	11,50	13,98		0,47 6,50	0,87		Ø 1,97*	5,91	lb 383,60

\*stem with key



# SBF

## SPLIT BODY FLOATING

Edition. 21.0


### CS Carbon Steel

### SS Stainless Steel

- **CS, SS, DSS, ALLOY (Forged)**

- Type: ball valve Split Body Floating
- Sizes: from DN13 up to DN150
- Pressure: ANSI 150-2500
- Temperature: from -50° up to +200° (depending on materials selected)'

### I STANDARD COMPOSITION OF VALVE

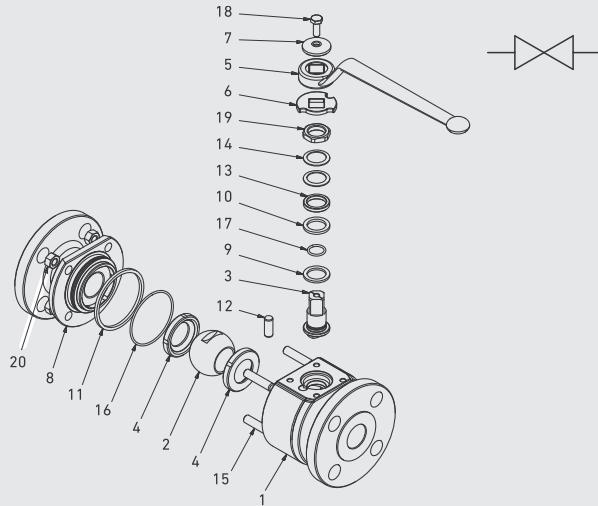

POS	DESCRIPTION	Q.TY	CS	SS	CS	SS
			Carbon Steel	Stainless Steel	MATERIAL	MATERIAL
1	Body	1	ASTM A350 LF2	ASTM A479 Tp.316		
2	Ball	1	ASTM A479 Tp.316	ASTM A479 Tp.316		
3	Stem	1	ASTM A479 Tp.316	ASTM A479 Tp.316		
4	Ball seat	2	RPTFE	RPTFE		
5	Handle	1	Fe37	Fe37		
6	Washer	1	AISI 316	AISI 316		
7	Washer	1	AISI 316	AISI 316		
8	Flange	1	ASTM A350 LF2	ASTM A479 Tp.316		
9	Stem ring	1	PTFE	PTFE		
10	Up ring	1	Graphite	Graphite		
11	Flange ring	1	Graphite	Graphite		
12	Pin	1	AISI 316	AISI 316		
13	Press ring	1	AISI 316	AISI 316		
14	Spring	2	AISI 316	AISI 316		
15	Bolts	8	ASTM A320 L7M	ASTM A193B8MC2		
16	Flange o-ring	1	FKM	FKM		
17	Stem o-ring	1	FKM	FKM		
18	Screw	1	ISO 4017 A4	ISO 4017 A4		
19	Nut	1	AISI 316	AISI 316		
20	Nut	8	ASTM A194 Gr.7M	ASTM A194 Gr.8M		



## CODE DESCRIPTION STRUCTURE

<b>SBF</b>	<b>ANSI600</b>	<b>2"</b>	<b>DN50</b>	<b>FB</b>	<b>LF2</b>	<b>F316</b>	<b>RPTFE</b>	<b>FKM</b>	<b>RF</b>
------------	----------------	-----------	-------------	-----------	------------	-------------	--------------	------------	-----------

**Type and way of valve** \_\_\_\_\_  
SBF Split body floating bolted body

**Valves dimension of pressure (LBS)** \_\_\_\_\_  
ANSI150  
ANSI300  
ANSI600  
ANSI900  
ANSI1500  
ANSI2500

**Sizes** \_\_\_\_\_  
from 1/2 to 6 inch

**Sizes** \_\_\_\_\_  
from DN13 up to DN150

**Bore** \_\_\_\_\_  
FB full bore  
RB reduce bore

**Body material** \_\_\_\_\_  
● A105\*      LF2  
● F316

**Stem material** \_\_\_\_\_  
● F316 A105\* LF2\* F51\* F304\*  
● F316 A105\* LF2\* F51\* F304\*


**Ball seat material** \_\_\_\_\_  
RPTFE PEEK\* POM\* DEVILON\* MET-TO-MET\*

**Adapter and stem seal material** \_\_\_\_\_  
FKM NBR\* EPDM\* MVQ\*

**Flanged** \_\_\_\_\_  
RF RTJ\* BW\* FF\*

- \*On request
- Pneumatic and electrical actuator
- Locking device

For further special requests  
please consult our technical/  
commercial service.

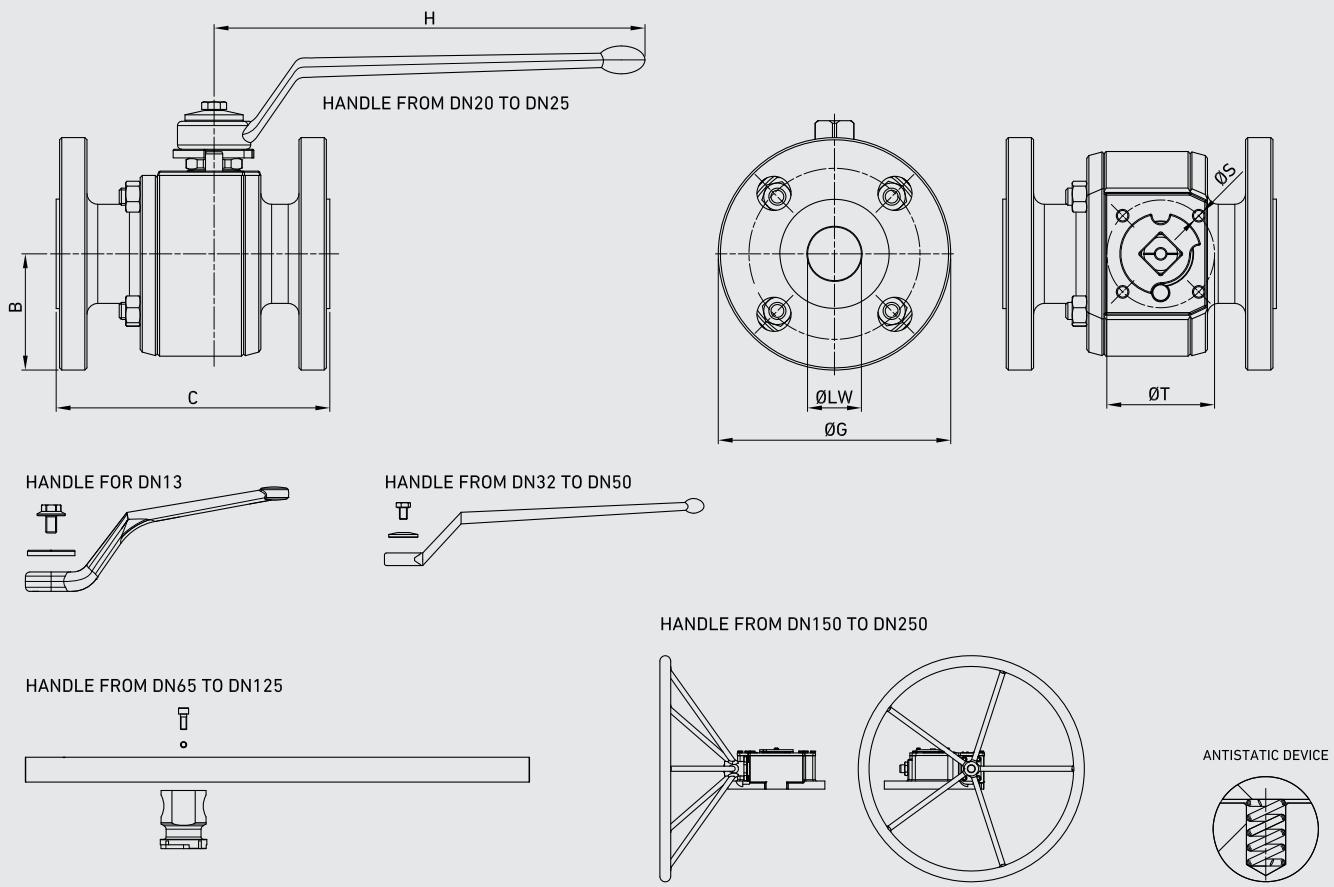

## SPLIT BODY





COMPONENTS	MATERIAL	MIN / MAX TEMP.	PROVISIONS
BODY AND FLANGE	ASTM A105	-20°+120°	• API-6D Specification for pipeline valves
	ASTM A105N	-29°+120°	• API 598 Valve inspection and test
	ASTM A182 F316	-60°+230°	• ASME B.16.34 Steel valves Flanged and butt welding ends
	ASTM A350 LF2	-40°+100°	• ASME B16.5 Steel pipe flanges and flanged fittings
STEM	ASTM A479 TP316	-60°+230°	• ASME B16.10 Face to face and end to end dimensions of ferrous valves
BALL	ASTM A182 F316	-60°+230°	• ASTM American society for testing materials
STEM SEALS	PTFE	-196°+230	• BS 6755 Testing of valves
	GRAPHITE		• NACE MR-01 -75 Sulfide stress cracking resistant metallic materials or oil field equipment
BALL SEATS	RPTFE	-196°+230°	• UNI EN ISO 9001 quality system
	PEEK	-50°+250°	• DIN/ISO 5211 for mounting
	NYLON	-40°+90°	• BS-5351 steel ball valves for the petroleum, petrochemical and allied industries
	DEVILON	-40°+150°	
O-RING	METAL-TO-METAL	-60°+230°	
	NBR	-30°+100°	
	FKM	-40°+200°	
	EPDM	-50°+150°	
STUD/NUT	MVQ	-50°+150°	
	ASTM A193 B7/Gr. 2H		
	ASTM A193 B8/Gr. 8		
	ASTM A320 L7/Gr. 7		

**■ SBF ANSI 150 FB**



TYPE	INCH	PN		B	C RF	C RTJ	ØG	H	ØT	ØS	ISO 5211	ØLW	ØLW1	WEIGHT
SBF A150	1/2	MPa	2	mm	44,5	108	119	89	110	36	M5	F03	13	- kg 2,3
		Psi	290	inch	1,75	4,25	4,69	3,50	4,33	1,42			0,51	- lb 5,07
SBF A150	3/4	MPa	2	mm	49,2	117	130	98,5	200	36	M5	F03	20	- kg 3,8
		Psi	290	inch	1,94	4,61	5,12	3,88	7,87	1,42			0,79	- lb 8,38
SBF A150	1	MPa	2	mm	54	127	140	108	200	50	M6	F05	25	- kg 5
		Psi	290	inch	2,13	5,00	5,51	4,25	7,87	1,97			0,98	- lb 11,02
SBF A150	1 1/4	MPa	2	mm	58,75	140	153	117,5	200	50	M6	F05	32	- kg 6,7
		Psi	290	inch	2,31	5,51	6,02	4,63	7,87	1,97			1,26	- lb 14,77
SBF A150	1 1/2	MPa	2	mm	63,5	165	178	127	310	70	M8	F07	40	- kg 10,5
		Psi	290	inch	2,50	6,50	7,01	5,00	12,20	2,76			1,57	- lb 23,15
SBF A150	2	MPa	2	mm	76,2	178	191	152,4	310	70	M8	F07	49	- kg 13,3
		Psi	290	inch	3,00	7,01	7,52	6,00	12,20	2,76			1,93	- lb 29,32
SBF A150	2 1/2	MPa	2	mm	89	190	203	178	650	70	M8	F07	63	- kg 22,7
		Psi	290	inch	3,50	7,48	7,99	7,01	25,59	2,76			2,48	- lb 50,04
SBF A150	3	MPa	2	mm	95	203	216	190	650	70	M8	F07	74	- kg 29,6
		Psi	290	inch	3,74	7,99	8,50	7,48	25,59	2,76			2,91	- lb 65,26
SBF A150	4	MPa	2	mm	115	229	242	230	650	102	M10	F10	100	- kg 49,6
		Psi	290	inch	4,53	9,02	9,53	9,06	25,59	4,02			3,94	- lb 109,35
SBF A150	6	MPa	2	mm	139,8	394	407	279,5	-	125	M12	F12	150	- kg 122
		Psi	290	inch	5,50	15,51	16,02	11,00	-	4,92			5,91	- lb 268,96

**■ SBF ANSI 150 RB**

TYPE	INCH	PN		B	C RF	C RTJ	ØG	H	ØT	ØS	ISO 5211	ØLW	ØLW1	WEIGHT
SBF A150	3/4x1/2	MPa	2	mm	49,25	117	130	98,5	110	36	M5	F03	13	20 kg 3
		Psi	290	inch	1,94	4,61	5,12	3,88	4,33	1,42			0,51	0,79 lb 6,61
SBF A150	1x3/4	MPa	2	mm	54	127	140	108	200	36	M5	F03	20	25 kg 4,2
		Psi	290	inch	2,13	5,00	5,51	4,25	7,87	1,42			0,79	0,98 lb 9,26
SBF A150	1 1/4x1	MPa	2	mm	58,75	140	153	117,5	200	50	M6	F05	25	32 kg 5,3
		Psi	290	inch	2,31	5,51	6,02	4,63	7,87	1,97			0,98	1,26 lb 11,68
SBF A150	1 1/2x1 1/4	MPa	2	mm	63,5	165	178	127	200	50	M6	F05	32	40 kg 7,9
		Psi	290	inch	2,50	6,50	7,01	5,00	7,87	1,97			1,26	1,57 lb 17,42
SBF A150	2x1 1/2	MPa	2	mm	75	178	191	152,4	310	70	M8	F07	40	49 kg 11,7
		Psi	290	inch	2,95	7,01	7,52	6,00	12,20	2,76			1,57	1,93 lb 25,79
SBF A150	2 1/2x2	MPa	2	mm	89	190	203	178	310	70	M8	F07	49	63 kg 17,6
		Psi	290	inch	3,50	7,48	7,99	7,01	12,20	2,76			1,93	2,48 lb 38,80
SBF A150	3x2	MPa	2	mm	74	203	216	190	310	70	M8	F07	49	74 kg 18,9
		Psi	290	inch	2,91	7,99	8,50	7,48	12,20	2,76			1,93	2,91 lb 41,67
SBF A150	4x3	MPa	2	mm	114,5	229	242	230	650	102	M10	F10	74	100 kg 29,1
		Psi	290	inch	4,51	9,02	9,53	9,06	25,59	4,02			2,91	3,94 lb 64,15
SBF A150	6x4	MPa	2	mm	139,8	394	407	279,5	-	125	M12	F12	100	150 kg 63
		Psi	290	inch	5,50	15,51	16,02	11,00	-	4,92			3,94	5,91 lb 138,89
SBF A150	8x6	MPa	2	mm	171,5	457	470	343	-	125	M12	F12	150	201 kg 150
		Psi	290	inch	6,75	17,99	18,50	13,50	-	4,92			5,91	7,91 lb 330,69

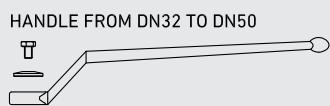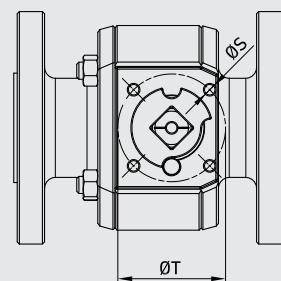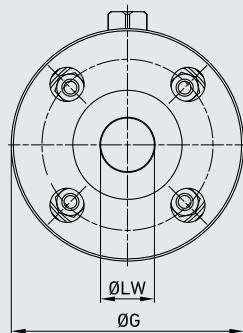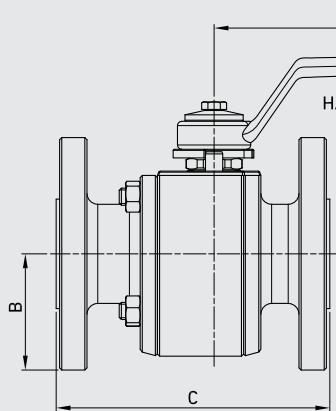

HANDLE FROM DN150 TO DN250

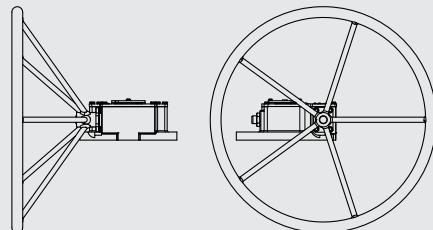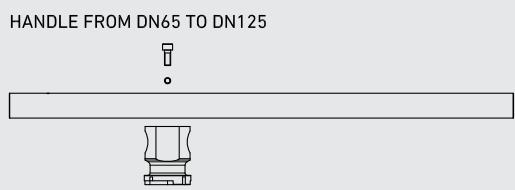


## ■ SBF ANSI 300 FB

TYPE	INCH	PN		B	C RF	C RTJ	ØG	H	ØT	ØS	ISO 5211	ØLW	ØLW1	WEIGHT
SBF A300	1/2	MPa	5	mm	47,6	140	151	95,2	110	36	M5	F03	13	- kg 3
		Psi	725	inch	1,87	5,51	5,94	3,75	4,33	1,42			0,51	- lb 6,61
SBF A300	3/4	MPa	5	mm	58,8	152	165	117,5	200	50	M6	F05	20	- kg 5,2
		Psi	725	inch	2,31	5,98	6,50	4,63	7,87	1,97			0,79	- lb 11,46
SBF A300	1	MPa	5	mm	62	165	178	123,8	200	50	M6	F05	25	- kg 7
		Psi	725	inch	2,44	6,50	7,01	4,87	7,87	1,97			0,98	- lb 15,43
SBF A300	1 1/4	MPa	5	mm	66,2	178	191	133,3	310	50	M6	F05	32	- kg 9,3
		Psi	725	inch	2,60	7,01	7,52	5,25	12,20	1,97			1,26	- lb 20,50
SBF A300	1 1/2	MPa	5	mm	77,8	190	203	155,6	310	70	M8	F07	40	- kg 13,9
		Psi	725	inch	3,06	7,48	7,99	6,13	12,20	2,76			1,57	- lb 30,64
SBF A300	2	MPa	5	mm	82,5	216	232	165	310	70	M8	F07	49	- kg 17,1
		Psi	725	inch	3,25	8,50	9,13	6,50	12,20	2,76			1,93	- lb 37,70
SBF A300	2 1/2	MPa	5	mm	95,3	241	257	190,5	650	70	M8	F07	63	- kg 28
		Psi	725	inch	3,75	9,49	10,12	7,50	25,59	2,76			2,48	- lb 61,73
SBF A300	3	MPa	5	mm	105	283	299	210	650	70	M8	F07	74	- kg 39
		Psi	725	inch	4,13	11,14	11,77	8,27	25,59	2,76			2,91	- lb 85,98
SBF A300	4	MPa	5	mm	127	305	321	254	650	102	M10	F10	100	- kg 73,7
		Psi	725	inch	5,00	12,01	12,64	10,00	25,59	4,02			3,94	- lb 162,48
SBF A300	6	MPa	5	mm	158,8	403	419	317,5	-	125	M12	F12	150	- kg 149
		Psi	725	inch	6,25	15,87	16,50	12,50	-	4,92			5,91	- lb 328,49

## ■ SBF ANSI 300 RB

TYPE	INCH	PN		B	C RF	C RTJ	ØG	H	ØT	ØS	ISO 5211	ØLW	ØLW1	WEIGHT
SBF A300	3/4x1/2	MPa	5	mm	58,8	152	165	117,5	111	36	M5	F03	13	20 kg 4,4
		Psi	725	inch	2,31	5,98	6,50	4,63	4,37	1,42			0,51	0,79 lb 9,70
SBF A300	1x3/4	MPa	5	mm	62	165	178	123,8	120	50	M5	F05	20	25 kg 6,3
		Psi	725	inch	2,44	6,50	7,01	4,87	4,72	1,97			0,79	0,98 lb 13,89
SBF A300	1 1/4x1	MPa	5	mm	66,2	178	191	133,3	310	50	M6	F05	25	32 kg 8,1
		Psi	725	inch	2,60	7,01	7,52	5,25	12,20	1,97			0,98	1,26 lb 17,86
SBF A300	1 1/2x1 1/4	MPa	5	mm	77,8	190	203	155,6	310	50	M6	F05	32	40 kg 10,3
		Psi	725	inch	3,06	7,48	7,99	6,13	12,20	1,97			1,26	1,57 lb 22,71
SBF A300	2x1 1/2	MPa	5	mm	82,5	216	232	165	310	70	M8	F07	40	49 kg 16,2
		Psi	725	inch	3,25	8,50	9,13	6,50	12,20	2,76			1,57	1,93 lb 35,71
SBF A300	2 1/2x2	MPa	5	mm	95,3	241	257	190,5	650	70	M8	F07	49	63 kg 20,5
		Psi	725	inch	3,75	9,49	10,12	7,50	25,59	2,76			1,93	2,48 lb 45,19
SBF A300	3x2	MPa	5	mm	105	283	299	210	650	70	M8	F07	49	74 kg 26,8
		Psi	725	inch	4,13	11,14	11,77	8,27	25,59	2,76			1,93	2,91 lb 59,08
SBF A300	4x3	MPa	5	mm	127	305	321	254	650	70	M8	F07	74	100 kg 45
		Psi	725	inch	5,00	12,01	12,64	10,00	25,59	2,76			2,91	3,94 lb 99,21
SBF A300	6x4	MPa	5	mm	158,8	403	419	317,5	-	102	M10	F10	100	150 kg 89,5
		Psi	725	inch	6,25	15,87	16,50	12,50	-	4,02			3,94	5,91 lb 197,31
SBF A300	8x6	MPa	5	mm	190,5	502	518	381	-	125	M12	F12	150	201 kg 183
		Psi	725	inch	7,50	19,76	20,39	15,00	-	4,92			5,91	7,91 lb 403,45

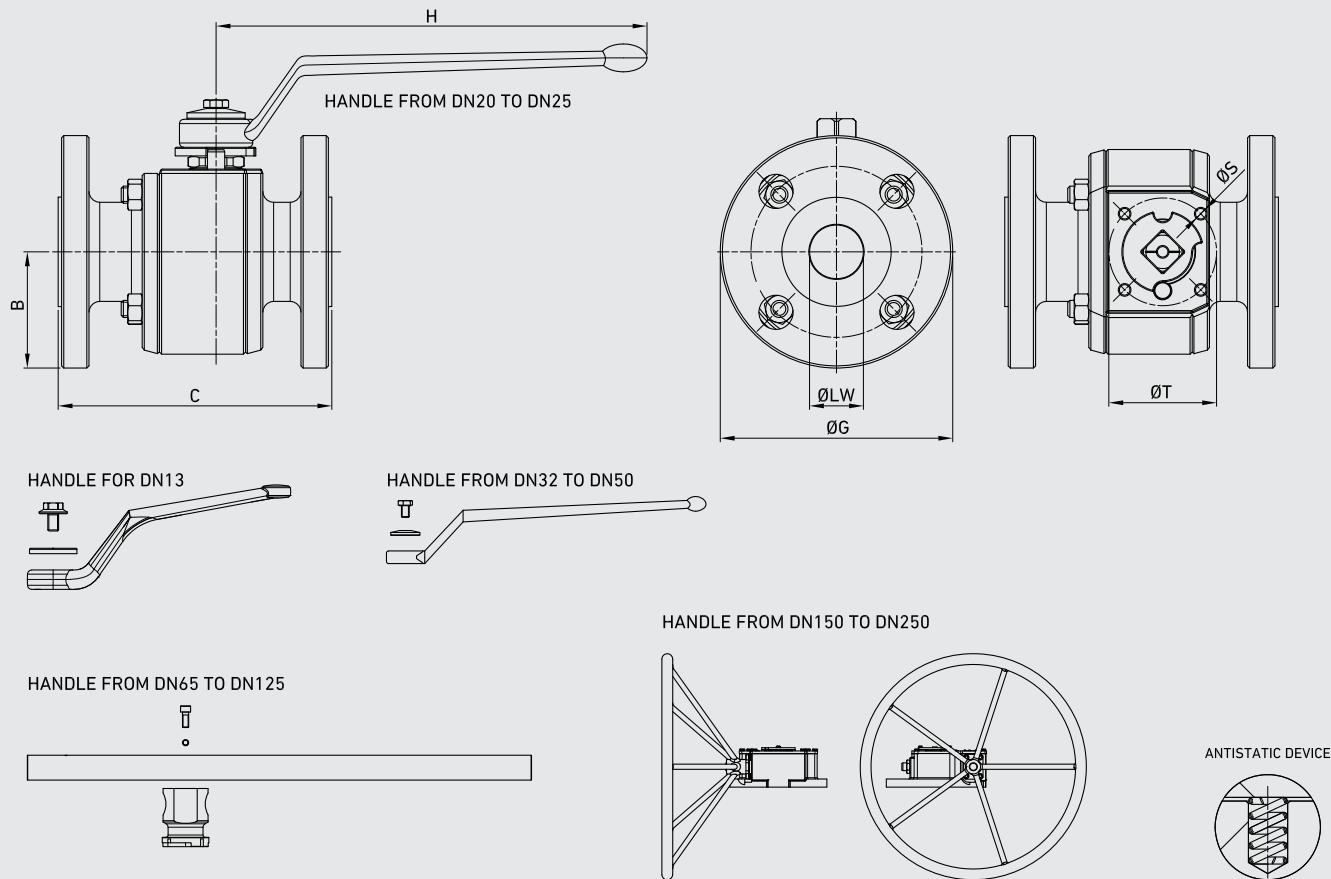

## ■ SBF ANSI 600 FB

TYPE	INCH	PN		B	C RF	C RTJ	ØG	H	ØT	ØS	ISO 5211	ØLW	ØLW1	WEIGHT	
SBF A600	1/2	MPa	10	mm	47,6	165	163	95,2	110	36	M5	F03	13	-	kg 3,4
		Psi	1450	inch	1,87	6,50	6,42	3,75	4,33	1,42			0,51	-	lb 7,50
SBF A600	3/4	MPa	10	mm	58,8	190	190	117,5	200	50	M5	F05	20	-	kg 5,8
		Psi	1450	inch	2,31	7,48	7,48	4,63	7,87	1,97			0,79	-	lb 12,79
SBF A600	1	MPa	10	mm	62	216	216	124	200	50	M6	F05	25	-	kg 8
		Psi	1450	inch	2,44	8,50	8,50	4,88	7,87	1,97			0,98	-	lb 17,64
SBF A600	1 1/4	MPa	10	mm	66,8	229	229	133,5	310	50	M6	F05	32	-	kg 11,9
		Psi	1450	inch	2,63	9,02	9,02	5,26	12,20	1,97			1,26	-	lb 26,23
SBF A600	1 1/2	MPa	10	mm	77,8	241	241	155,6	310	70	M8	F07	40	-	kg 15,7
		Psi	1450	inch	3,06	9,49	9,49	6,13	12,20	2,76			1,57	-	lb 34,61
SBF A600	2	MPa	10	mm	82,5	292	295	165,1	310	70	M8	F07	49	-	kg 20,7
		Psi	1450	inch	3,25	11,50	11,61	6,50	12,20	2,76			1,93	-	lb 45,64
SBF A600	2 1/2	MPa	10	mm	95,3	330	333	190,5	650	70	M8	F07	63	-	kg 40
		Psi	1450	inch	3,75	12,99	13,11	7,50	25,59	2,76			2,48	-	lb 88,18
SBF A600	3	MPa	10	mm	105	356	359	210	650	70	M8	F07	74	-	kg 49,6
		Psi	1450	inch	4,13	14,02	14,13	8,27	25,59	2,76			2,91	-	lb 109,35
SBF A600	4	MPa	10	mm	136,5	432	435	273	650	102	M10	F10	100	-	kg 97
		Psi	1450	inch	5,37	17,01	17,13	10,75	25,59	4,02			3,94	-	lb 213,85

## ■ SBF ANSI 600 RB


TYPE	INCH	PN		B	C RF	C RTJ	ØG	H	ØT	ØS	ISO 5211	ØLW	ØLW1	WEIGHT	
SBF A600	3/4 x 1/2	MPa	10	mm	58,8	190	190	117,5	110	36	M5	F03	13	20	kg 5,2
		Psi	1450	inch	2,31	7,48	7,48	4,63	4,33	1,42			0,51	0,79	lb 11,46
SBF A600	1x3/4	MPa	10	mm	62	216	216	124	110	50	M5	F05	20	25	kg 6,9
		Psi	1450	inch	2,44	8,50	8,50	4,88	4,33	1,97			0,79	0,98	lb 15,21
SBF A600	1 1/4x1	MPa	10	mm	66,8	229	229	133,5	310	50	M6	F05	25	32	kg 9,5
		Psi	1450	inch	2,63	9,02	9,02	5,26	12,20	1,97			0,98	1,26	lb 20,94
SBF A600	1 1/2x1 1/4	MPa	10	mm	77,8	241	241	155,6	310	50	M6	F05	32	40	kg 12,9
		Psi	1450	inch	3,06	9,49	9,49	6,13	12,20	1,97			1,26	1,57	lb 28,44
SBF A600	2x1 1/2	MPa	10	mm	82,5	292	295	165,1	310	70	M8	F07	40	49	kg 17,3
		Psi	1450	inch	3,25	11,50	11,61	6,50	12,20	2,76			1,57	1,93	lb 38,14
SBF A600	2 1/2x2	MPa	10	mm	95,3	330	333	190,5	650	70	M8	F07	49	63	kg 25,2
		Psi	1450	inch	3,75	12,99	13,11	7,50	25,59	2,76			1,93	2,48	lb 55,56
SBF A600	3x2	MPa	10	mm	74	356	359	210	650	70	M8	F07	49	74	kg 36
		Psi	1450	inch	2,91	14,02	14,13	8,27	25,59	2,76			1,93	2,91	lb 79,37
SBF A600	4x3	MPa	10	mm	136,5	432	435	273	650	70	M8	F07	74	100	kg 65,7
		Psi	1450	inch	5,37	17,01	17,13	10,75	25,59	2,76			2,91	3,94	lb 144,84
SBF A600	6x4	MPa	10	mm	177,5	559	562	355,5	-	102	M10	F10	100	150	kg 157
		Psi	1450	inch	6,99	22,01	22,13	14,00	-	4,02			3,94	5,91	lb 346,13

## ■ SBF ANSI 900 FB

TYPE	INCH	PN		B	C RF	C RTJ	ØG	H	ØT	ØS	ISO 5211	ØLW	ØLW1	WEIGHT	
SBF A600	1/2	MPa	10	mm	47,6	165	163	95,2	110	36	M5	F03	13	-	kg 3,4
		Psi	1450	inch	1,87	6,50	6,42	3,75	4,33	1,42			0,51	-	lb 7,50
SBF A600	3/4	MPa	10	mm	58,8	190	190	117,5	200	50	M5	F05	20	-	kg 5,8
		Psi	1450	inch	2,31	7,48	7,48	4,63	7,87	1,97			0,79	-	lb 12,79
SBF A600	1	MPa	10	mm	62	216	216	124	200	50	M6	F05	25	-	kg 8
		Psi	1450	inch	2,44	8,50	8,50	4,88	7,87	1,97			0,98	-	lb 17,64
SBF A600	1 1/4	MPa	10	mm	66,8	229	229	133,5	310	50	M6	F05	32	-	kg 11,9
		Psi	1450	inch	2,63	9,02	9,02	5,26	12,20	1,97			1,26	-	lb 26,23
SBF A600	1 1/2	MPa	10	mm	77,8	241	241	155,6	310	70	M8	F07	40	-	kg 15,7
		Psi	1450	inch	3,06	9,49	9,49	6,13	12,20	2,76			1,57	-	lb 34,61
SBF A600	4	MPa	10	mm	136,5	432	435	273	650	102	M10	F10	100	-	kg 97
		Psi	1450	inch	5,37	17,01	17,13	10,75	25,59	4,02			3,94	-	lb 213,85

## ■ SBF ANSI 900 RB

TYPE	INCH	PN		B	C RF	C RTJ	ØG	H	ØT	ØS	ISO 5211	ØLW	ØLW1	WEIGHT	
SBF A900	3/4x1/2	MPa	15	mm	65	229	229	130	110	36	M5	F03	13	20	kg 7,5
		Psi	2175	inch	2,56	9,02	9,02	5,12	4,33	1,42			0,51	0,79	lb 16,53
SBF A900	1x3/4	MPa	15	mm	74,5	254	254	149	110	50	M6	F05	19	25	kg 10,3
		Psi	2175	inch	2,93	10,00	10,00	5,87	4,33	1,97			0,75	0,98	lb 22,71
SBF A900	1 1/4x1	MPa	15	mm	79,5	279	279	159	310	50	M6	F05	25	32	kg 11,8
		Psi	2175	inch	3,13	10,98	10,98	6,26	12,20	1,97			0,98	1,26	lb 26,01
SBF A900	1 1/2x1 1/4	MPa	15	mm	89	305	305	178	310	70	M8	F07	32	38	kg 15,6
		Psi	2175	inch	3,50	12,01	12,01	7,01	12,20	2,76			1,26	1,50	lb 34,39
SBF A900	2x1 1/2	MPa	15	mm	108	368	371	216	310	70	M8	F07	38	49	kg 35,6
		Psi	2175	inch	4,25	14,49	14,61	8,50	12,20	2,76			1,50	1,93	lb 78,48
SBF A900	2 1/2x2	MPa	15	mm	122	419	422	244	650	102	M10	F10	49	63	kg 44,5
		Psi	2175	inch	4,80	16,50	16,61	9,61	25,59	4,02			1,93	2,48	lb 98,11

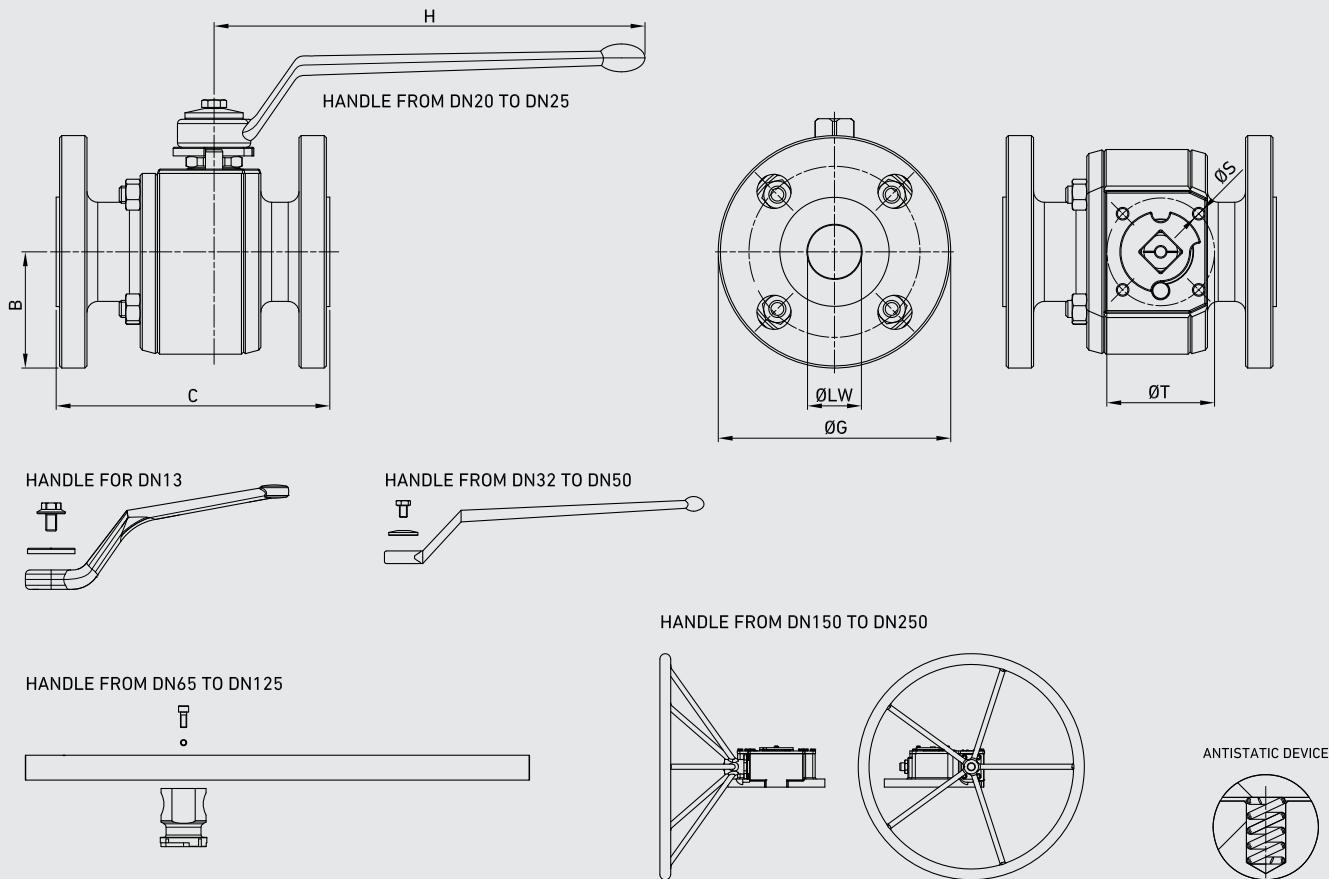

## ■ SBF ANSI 1500 FB

TYPE	INCH	PN		B	C RF	C RTJ	ØG	H	ØT	ØS	ISO 5211	ØLW	ØLW1	WEIGHT	
SBF A1500	1/2	MPa	25	mm	60,5	216	216	121	110	36	M5	F03	13	-	kg 6
		Psi	3625	inch	2,38	8,50	8,50	4,76	4,33	1,42			0,51	-	lb 13,23
SBF A1500	3/4	MPa	25	mm	65	229	229	130	110	50	M6	F05	19	-	kg 9,3
		Psi	3625	inch	2,56	9,02	9,02	5,12	4,33	1,97			0,75	-	lb 20,50
SBF A1500	1	MPa	25	mm	74,5	254	254	149	200	50	M6	F05	25	-	kg 12,5
		Psi	3625	inch	2,93	10,00	10,00	5,87	7,87	1,97			0,98	-	lb 27,56
SBF A1500	1 1/4	MPa	25	mm	79,5	279	279	159	310	70	M8	F07	32	-	kg 14,3
		Psi	3625	inch	3,13	10,98	10,98	6,26	12,20	2,76			1,26	-	lb 31,53
SBF A1500	1 1/2	MPa	25	mm	89	305	305	178	310	70	M8	F07	38	-	kg 18,5
		Psi	3625	inch	3,50	12,01	12,01	7,01	12,20	2,76			1,50	-	lb 40,79
SBF A1500	2	MPa	25	mm	107,5	368	371	215	310	70	M8	F07	49	-	kg 40
		Psi	3625	inch	4,23	14,49	14,61	8,46	12,20	2,76			1,93	-	lb 88,18

## ■ SBF ANSI 1500 RB

TYPE	INCH	PN		B	C RF	C RTJ	ØG	H	ØT	ØS	ISO 5211	ØLW	ØLW1	WEIGHT	
SBF A1500	3/4x1/2	MPa	25	mm	65	229	229	130	110	50	M5	F03	13	20	kg 7,5
		Psi	3625	inch	2,56	9,02	9,02	5,12	4,33	1,97			0,51	0,79	lb 16,53
SBF A1500	1x3/4	MPa	25	mm	74,5	254	254	149	110	50	M6	F05	19	25	kg 10,3
		Psi	3625	inch	2,93	10,00	10,00	5,87	4,33	1,97			0,75	0,98	lb 22,71
SBF A1500	1 1/4x1	MPa	25	mm	79,5	279	279	159	310	50	M6	F05	25	32	kg 11,8
		Psi	3625	inch	3,13	10,98	10,98	6,26	12,20	1,97			0,98	1,26	lb 26,01
SBF A1500	1 1/2x1 1/4	MPa	25	mm	89	305	305	178	310	70	M8	F07	32	38	kg 15,6
		Psi	3625	inch	3,50	12,01	12,01	7,01	12,20	2,76			1,26	1,50	lb 34,39
SBF A1500	2x1 1/2	MPa	25	mm	108	368	371	216	310	70	M8	F07	38	49	kg 35,6
		Psi	3625	inch	4,25	14,49	14,61	8,50	12,20	2,76			1,50	1,93	lb 78,48
SBF A1500	2 1/2x2	MPa	25	mm	122	419	422	244	650	102	M10	F10	49	63	kg 44,5
		Psi	3625	inch	4,80	16,50	16,61	9,61	25,59	4,02			1,93	2,48	lb 98,11

## ■ SBF ANSI 2500 FB

TYPE	INCH	PN		B	C RF	C RTJ	ØG	H	ØT	ØS	ISO 5211	ØLW	ØLW1	WEIGHT	
SBF A2500	1/2	MPa	42	mm	66,5	264	264	133	110	50	M6	F05	13	-	kg 12,3
		Psi	6090	inch	2,62	10,39	10,39	5,24	4,33	1,97			0,51	-	lb 27,12
SBF A2500	3/4	MPa	42	mm	70	273	273	140	110	50	M6	F05	19	-	kg 15,3
		Psi	6090	inch	2,76	10,75	10,75	5,51	4,33	1,97			0,75	-	lb 33,73
SBF A2500	1	MPa	42	mm	79,5	308	308	159	110	70	M8	F07	25	-	kg 22,3
		Psi	6090	inch	3,13	12,13	12,13	6,26	4,33	2,76			0,98	-	lb 49,16
SBF A2500	1 1/4	MPa	42	mm	92	356	359	184	310	70	M8	F07	32	-	kg 23,5
		Psi	6090	inch	3,62	14,02	14,13	7,24	12,20	2,76			1,26	-	lb 51,81
SBF A2500	1 1/2	MPa	42	mm	101,5	387	390	203	310	70	M8	F07	38	-	kg 29,5
		Psi	6090	inch	4,00	15,24	15,35	7,99	12,20	2,76			1,50	-	lb 65,04
SBF A2500	2	MPa	42	mm	117,5	451	454	235	310	102	M10	F10	42	-	kg 55,6
		Psi	6090	inch	4,63	17,76	17,87	9,25	12,20	4,02			1,65	-	lb 122,58

## ■ SBF ANSI 2500 RB

TYPE	INCH	PN		B	C RF	C RTJ	ØG	H	ØT	ØS	ISO 5211	ØLW	ØLW1	WEIGHT	
SBF A2500	3/4x1/2	MPa	42	mm	70	273	273	140	110	50	M6	F05	13	20	kg 11,5
		Psi	6090	inch	2,76	10,75	10,75	5,51	4,33	1,97			0,51	0,79	lb 25,35
SBF A2500	1x3/4	MPa	42	mm	79,5	308	308	159	110	50	M6	F05	19	25	kg 16,5
		Psi	6090	inch	3,13	12,13	12,13	6,26	4,33	1,97			0,75	0,98	lb 36,38
SBF A2500	1 1/4x1	MPa	42	mm	92	356	359	184	310	70	M8	F07	25	32	kg 18,6
		Psi	6090	inch	3,62	14,02	14,13	7,24	12,20	2,76			0,98	1,26	lb 41,01
SBF A2500	1 1/2x1 1/4	MPa	42	mm	101,5	387	390	203	310	70	M8	F07	32	38	kg 24,2
		Psi	6090	inch	4,00	15,24	15,35	7,99	12,20	2,76			1,26	1,50	lb 53,35
SBF A2500	2x1 1/2	MPa	42	mm	117,5	451	454	235	310	102	M10	F10	38	42	kg 52,3
		Psi	6090	inch	4,63	17,76	17,87	9,25	12,20	4,02			1,50	1,65	lb 115,30
SBF A2500	2 1/2x2	MPa	42	mm	133,5	508	511	267	650	102	M10	F07	42	52	kg 58,5
		Psi	6090	inch	5,26	20,00	20,12	10,51	25,59	4,02			1,65	2,05	lb 128,97



## SBT

## SPLIT BODY TRUNNION

Edition. 21.0


## CS Carbon Steel

## SS Stainless Steel

## • CS, SS, DSS, ALLOY (Forged)

- Type: ball valve Split Body Trunnion
- Sizes: from DN20 up to DN900
- Pressure: ANSI 150-2500
- Temperature: from -50° up to +200° (depending on materials selected)

## STANDARD COMPOSITION OF VALVE

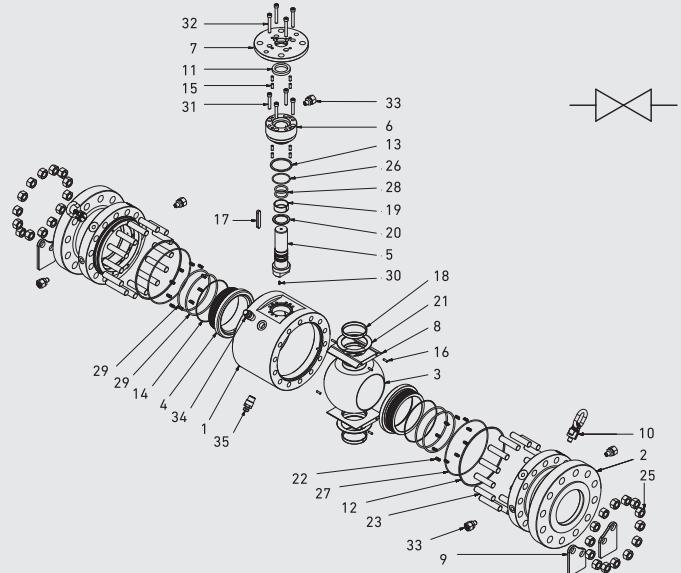

POS	DESCRIPTION	CS	SS
		Carbon Steel	Stainless Steel
1	Body	ASTM A350 LF2	ASTM A182 F316
2	Closure	ASTM A350 LF2	ASTM A182 F316
3	Ball	ASTM A182 F316	ASTM A182 F316
4	Seat	ASTM A479 Tp.316/RPTFE	ASTM A479 Tp.316/RPTFE
5	Stem	ASTM A479 Tp.316	ASTM A479 Tp.316
6	Bonnet	ASTM A350 LF2	ASTM A479 Tp.316
7	Cover Plate	ASTM A350 LF2	ASTM A479 Tp.316
8	Spacer	ASTM A516 Gr.70	ASTM A240 Tp.316
9	Valve Support	ASTM A516 Gr.70	ASTM A516 Gr.70
10	Eyebolt	Gr.80	Gr.80
11	Stem Gasket	Graphite	Graphite
12	Seat Gasket	Graphite	Graphite
13	Body/Bonnet Gasket S.W.T.	Graphite+316L	Graphite+316L
14	Body/Flange Gasket S.W.T.	Graphite+316L	Graphite+316L
15	Body/Bonnet/Cover Pin	100Cr6	100Cr6
16	Spacer Pin	100Cr6	100Cr6
17	Stem Key	C70	C70
18	Ball Bushing	AISI 316 + N.F.C.	AISI 316 + N.F.C.

POS	DESCRIPTION	CS	SS
		Carbon Steel	Stainless Steel
19	Stem Bushing	AISI 316 + N.F.C.	AISI 316 + N.F.C.
20	Stem Thrust Washer	AISI 316 + N.F.C.	AISI 316 + N.F.C.
21	Ball Thrust Washer	AISI 316 + N.F.C.	AISI 316 + N.F.C.
22	Spring Inconel	INCONEL X750	INCONEL X750
23	Stud	ASTM A320 L7M	ASTM A193 B8M Cl.2
24	Support/Lifting Lug Stud	ASTM A320 L7M	ASTM A193 B8M Cl.2
25	Nut	ASTM A194 Gr.7M	ASTM A194 Gr.8M
26	Body/Bonnet o-ring	FKM	FKM
27	Body/Flange o-ring	FKM	FKM
28	Stem o-ring	FKM	FKM
29	Seat o-ring	FKM	FKM
30	Antistatic Device	INCONEL X750	ASTM A479 Tp.316
31	Bonnet T.C.E.I.	ASTM A320 L7M	ASTM A193 B8M Cl.2
32	Cover Plate T.C.E.I.	ASTM A320 L7M	ASTM A193 B8M Cl.2
33	Stem Injection	ASTM A479 Tp.316	ASTM A479 Tp.316
34	Drain Plug	ASTM A479 Tp.316	ASTM A479 Tp.316
35	Vent Bleeder	ASTM A479 Tp.316	ASTM A479 Tp.316



ALSO AVAILABLE IN FULLY  
WELDED VERSION

## CODE DESCRIPTION STRUCTURE

<b>SBT</b>	<b>ANSI600</b>	<b>3/4"</b>	<b>DN50</b>	<b>FB</b>	<b>LF2</b>	<b>F316</b>	<b>RPTFE</b>	<b>FKM</b>	<b>RF</b>
------------	----------------	-------------	-------------	-----------	------------	-------------	--------------	------------	-----------

**Type and way of valve** \_\_\_\_\_  
SBT Split body trunnion bolted body

**Valves dimension of pressure (LBS)** \_\_\_\_\_

ANSI150  
ANSI300  
ANSI600  
ANSI900  
ANSI1500  
ANSI2500

**Sizes** \_\_\_\_\_  
from 3/4" to 36"

**Sizes** \_\_\_\_\_  
from DN20 to DN900

**Bore** \_\_\_\_\_  
FB full bore  
RB reduce bore

**Body material** \_\_\_\_\_  
 A105\*    LF2  
 F316

**Stem material** \_\_\_\_\_  
 F316 F51\*  
 F316 F51\*

**Ball seat material** \_\_\_\_\_  
RPTFE PEEK\* NYLON\* DEVLON\* MET-TO-MET\*


**Adapter and stem seal material** \_\_\_\_\_  
FKM NBR\* EPDM\* MV\*  
FF

**Flanged** \_\_\_\_\_  
RF RTJ\* BW\* FF\*

\*On request

- Lever
- Gear
- Pneumatic and electrical actuator
- Locking device

For further special requests  
please consult our technical/  
commercial service.

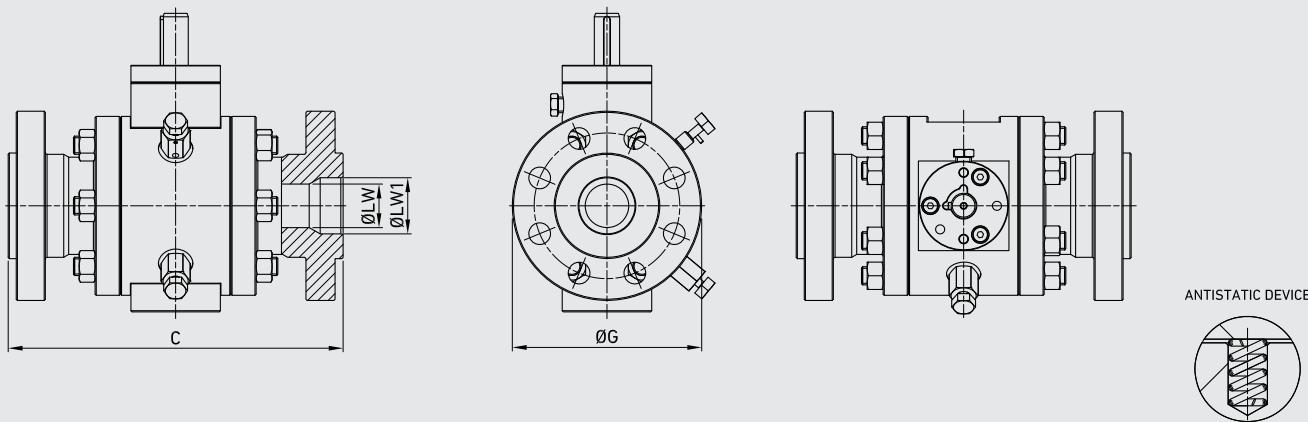

## ■ SBT ANSI 150 FB




TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A150	2	MPa 2	mm 49	-	178	191	150
		Psi 290	inch 1,93	-	7,01	7,52	5,91
SBT A150	2 1/2	MPa 2	mm 62	-	191	203	180
		Psi 290	inch 2,44	-	7,52	7,99	7,09
SBT A150	3	MPa 2	mm 74	-	203	216	190,5
		Psi 290	inch 2,91	-	7,99	8,50	7,50
SBT A150	4	MPa 2	mm 100	-	229	241	229
		Psi 290	inch 3,94	-	9,02	9,49	9,02

## ■ SBT ANSI 150 RB

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A150	2x1 1/2	MPa 2	mm 38	49	178	191	150
		Psi 290	inch 1,50	1,93	7,01	7,52	5,91
SBT A150	3x2	MPa 2	mm 49	74	203	216	190
		Psi 290	inch 1,93	2,91	7,99	8,50	7,48
SBT A150	4x3	MPa 2	mm 74	100	229	241	229
		Psi 290	inch 2,91	3,94	9,02	9,49	9,02
SBT A150	6x4	MPa 2	mm 100	150	394	406	280
		Psi 290	inch 3,94	5,91	15,51	15,98	11,02


## ■ SPLIT BODY

COMPONENTS	MATERIAL	MIN / MAX TEMP.	PROVISIONS
BODY AND FLANGE	ASTM A105	-20°+120°	• API 6D Specification for pipeline valves
	ASTM A105N	-29°+120°	• API 598 Valve inspection and test
	ASTM A182 F316	-60°+230°	• ASME B.16.34 Steel valves Flanged and butt welding ends
	ASTM A350 LF2	-40°+100°	• ASME B16.5 Steel pipe flanges and flanged fittings
STEM	ASTM A479 TP316	-60°+230°	• ASME B16.10 Face to face and end to end dimensions of ferrous valves
BALL	ASTM A182 F316	-60°+230°	• ASTM American society for testing materials
STEM SEALS	PTFE	-196°+230°	• BS 6755 Testing of valves
	GRAPHITE		• NACE MR-01 -75 Sulfide stress cracking resistant metallic materials or oil field equipment
BALL SEATS	RPTFE	-196°+230°	• UNI EN ISO 9001 quality system
	PEEK	-50°+250°	• DIN/ISO 5211 for mounting
	NYLON	-40°+90°	• BS 5351 steel ball valves for the petroleum, petrochemical and allied industries
	DEVILON	-40°+150°	
O-RING	METAL-TO-METAL	-60°+230°	
	NBR	-30°+100°	
	FKM	-40°+200°	
	EPDM	-50°+150°	
STUD/NUT	MVQ	-50°+150°	
	ASTM A193 B7/GR. 2H		
	ASTM A 193 B8/GR. 8		
	ASTM A320 L7/GR. 7		

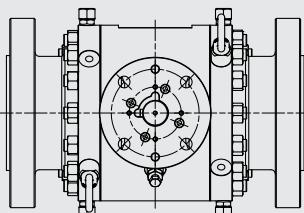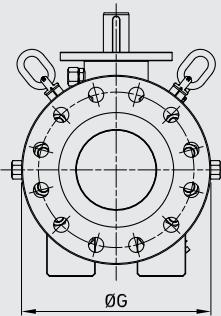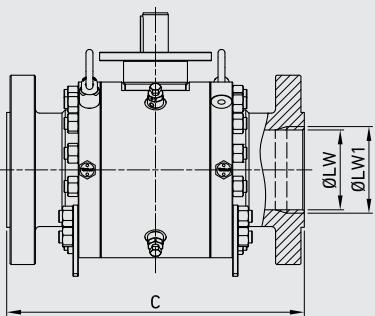

ALSO AVAILABLE IN  
FULLY WELDED VERSION

ANTISTATIC DEVICE



## ■ SBT ANSI 150 FB




TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBTA150	6	MPa 2	mm 150	-	394	406	280
		Psi 290	inch 5,91	-	15,51	15,98	11,02
SBTA150	8	MPa 2	mm 201	-	457	470	345
		Psi 290	inch 7,91	-	17,99	18,50	13,58
SBTA150	10	MPa 2	mm 252	-	533	546	405
		Psi 290	inch 9,92	-	20,98	21,50	15,94
SBTA150	12	MPa 2	mm 303	-	610	622	485
		Psi 290	inch 11,93	-	24,02	699,00	19,09
SBTA150	14	MPa 2	mm 334	-	689	699	533,5
		Psi 290	inch 13,15	-	27,13	27,52	21,00
SBTA150	16	MPa 2	mm 385	-	762	775	597
		Psi 290	inch 15,16	-	30,00	30,51	23,50
SBTA150	18	MPa 2	mm 436	-	864	876	635
		Psi 290	inch 17,17	-	34,02	34,49	25,00
SBTA150	20	MPa 2	mm 487	-	914	927	698,5
		Psi 290	inch 19,17	-	35,98	36,50	27,50
SBTA150	22	MPa 2	mm 538	-	-	-	750*
		Psi 290	inch 21,18	-	-	-	29,53
SBTA150	24	MPa 2	mm 589	-	1067	1080	813
		Psi 290	inch 23,19	-	42,01	42,52	32,01
SBTA150	26	MPa 2	mm 635	-	1143	-	-
		Psi 290	inch 25,00	-	45,00	-	-
SBTA150	28	MPa 2	mm 686	-	1245	-	-
		Psi 290	inch 27,01	-	49,02	-	-
SBTA150	30	MPa 2	mm 737	-	1295	-	-
		Psi 290	inch 29,02	-	50,98	-	-
SBTA150	32	MPa 2	mm 781	-	1372	-	-
		Psi 290	inch 30,75	-	54,02	-	-
SBTA150	34	MPa 2	mm 832	-	1473	-	-
		Psi 290	inch 32,76	-	57,99	-	-
SBTA150	36	MPa 2	mm 876	-	1524	-	-
		Psi 290	inch 34,49	-	60,00	-	-

\*According to MSS SP44


## ■ SBT ANSI 150 RB

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBTA150	8x6	MPa 2	mm 150	201	457	470	345
		Psi 290	inch 5,91	7,91	17,99	18,50	13,58
SBTA150	10x8	MPa 2	mm 201	252	533	546	405
		Psi 290	inch 7,91	9,92	20,98	21,50	15,94
SBTA150	12x10	MPa 2	mm 252	303	610	622	485
		Psi 290	inch 9,92	11,93	24,02	24,49	19,09
SBTA150	14x10	MPa 2	mm 252	334	689	699	533,5
		Psi 290	inch 9,92	13,15	27,13	27,52	21,00
SBTA150	16x12	MPa 2	mm 303	385	762	775	597
		Psi 290	inch 11,93	15,16	30,00	30,51	23,50
SBTA150	18x14	MPa 2	mm 334	436	864	876	635
		Psi 290	inch 13,15	17,17	34,02	34,49	25,00
SBTA150	20x16	MPa 2	mm 385	487	914	927	698,5
		Psi 290	inch 15,16	19,17	35,98	36,50	27,50
SBTA150	24x20	MPa 2	mm 487	589	1067	1080	813
		Psi 290	inch 19,17	23,19	42,01	42,52	32,01
SBTA150	28x24	MPa 2	mm 589	684	1245	-	925*
		Psi 290	inch 23,19	26,93	49,02	-	36,42
SBTA150	30x24	MPa 2	mm 591	737	1295	-	-
		Psi 290	inch 23,27	29,02	50,98	-	-
SBTA150	36x30	MPa 2	mm 737	876	1524	-	-
		Psi 290	inch 29,02	34,49	60,00	-	-

\*According to MSS SP44

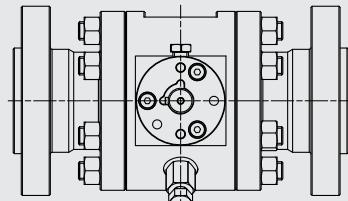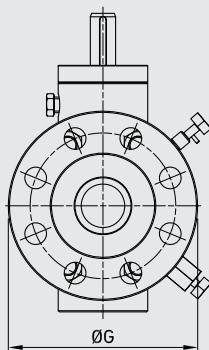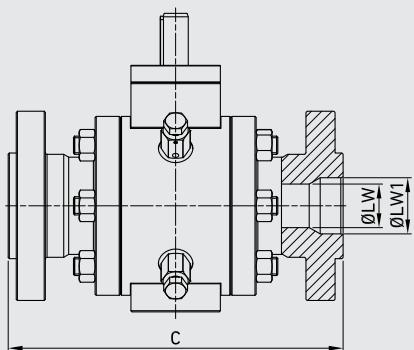

ANTISTATIC DEVICE






## ■ SBT ANSI 300 FB

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A300	2	MPa 5	mm 49	-	216	232	165
		Psi 725	inch 1,93	-	8,50	9,13	6,50
SBT A300	2 1/2	MPa 5	mm 62	-	241	257	190
		Psi 725	inch 2,44	-	9,49	10,12	7,48
SBT A300	3	MPa 5	mm 74	-	283	298	210
		Psi 725	inch 2,91	-	11,14	11,73	8,27
SBT A300	4	MPa 5	mm 100	-	305	321	255
		Psi 725	inch 3,94	-	12,01	12,64	10,04


## ■ SBT ANSI 300 RB

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A300	2x1 1/2	MPa 5	mm 38	49	216	232	165
		Psi 725	inch 1,50	1,93	8,50	9,13	6,50
SBT A300	3x2	MPa 5	mm 49	74	283	298	210
		Psi 725	inch 1,93	2,91	11,14	11,73	8,27
SBT A300	4x3	MPa 5	mm 74	100	305	321	255
		Psi 725	inch 2,91	3,94	12,01	12,64	10,04
SBT A300	6x4	MPa 5	mm 100	150	403	419	320
		Psi 725	inch 3,94	5,91	15,87	16,50	12,60

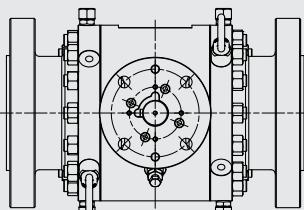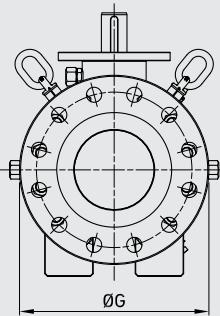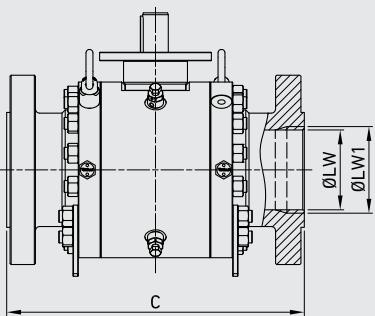

ALSO AVAILABLE IN  
FULLY WELDED VERSION

ANTISTATIC DEVICE



## SBT ANSI 300 FB




TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A300	6	MPa 5	mm 150	-	403	419	320
		Psi 725	inch 5,91	-	15,87	16,50	12,60
SBT A300	8	MPa 5	mm 201	-	502	518	380
		Psi 725	inch 7,91	-	19,76	20,39	14,96
SBT A300	10	MPa 5	mm 252	-	568	584	445
		Psi 725	inch 9,92	-	22,36	22,99	17,52
SBT A300	12	MPa 5	mm 303	-	648	664	520
		Psi 725	inch 11,93	-	25,51	26,14	20,47
SBT A300	14	MPa 5	mm 334	-	762	778	584,5
		Psi 725	inch 13,15	-	30,00	30,63	23,01
SBT A300	16	MPa 5	mm 385	-	838	854	648
		Psi 725	inch 15,16	-	32,99	33,62	25,51
SBT A300	18	MPa 5	mm 436	-	914	930	711,5
		Psi 725	inch 17,17	-	35,98	36,61	28,01
SBT A300	20	MPa 5	mm 487	-	991	1010	775
		Psi 725	inch 19,17	-	39,02	39,76	30,51
SBT A300	22	MPa 5	mm 538	-	1092	1114	840*
		Psi 725	inch 21,18	-	42,99	43,86	33,07
SBT A300	24	MPa 5	mm 589	-	1143	1165	914,5
		Psi 725	inch 23,19	-	45,00	45,87	36,00
SBT A300	26	MPa 5	mm 635	-	1245	1270	-
		Psi 725	inch 25,00	-	49,02	50,00	-
SBT A300	28	MPa 5	mm 686	-	1346	1372	-
		Psi 725	inch 27,01	-	52,99	54,02	-
SBT A300	30	MPa 5	mm 737	-	1397	1422	-
		Psi 725	inch 29,02	-	55,00	55,98	-
SBT A300	32	MPa 5	mm 781	-	1524	1553	-
		Psi 725	inch 30,75	-	60,00	61,14	-
SBT A300	34	MPa 5	mm 832	-	1626	1654	-
		Psi 725	inch 32,76	-	64,02	65,12	-
SBT A300	36	MPa 5	mm 876	-	1727	1756	-
		Psi 725	inch 34,49	-	67,99	69,13	-

\*According to MSS SP44

## SBT ANSI 300 RB

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A300	8x6	MPa 5	mm 150	201	502	518	380
		Psi 725	inch 5,91	7,91	19,76	20,39	14,96
SBT A300	10x8	MPa 5	mm 201	252	568	584	445
		Psi 725	inch 7,91	9,92	22,36	22,99	17,52
SBT A300	12x10	MPa 5	mm 252	303	648	664	520
		Psi 725	inch 9,92	11,93	25,51	26,14	20,47
SBT A300	14x10	MPa 5	mm 252	334	762	778	584,5
		Psi 725	inch 9,92	13,15	30,00	30,63	23,01
SBT A300	16x12	MPa 5	mm 303	385	838	854	648
		Psi 725	inch 11,93	15,16	32,99	33,62	25,51
SBT A300	18x14	MPa 5	mm 334	436	914	930	711,5
		Psi 725	inch 13,15	17,17	35,98	36,61	28,01
SBT A300	20x16	MPa 5	mm 385	487	991	1010	775
		Psi 725	inch 15,16	19,17	39,02	39,76	30,51
SBT A300	24x20	MPa 5	mm 487	589	1143	1165	914,5
		Psi 725	inch 19,17	23,19	45,00	45,87	36,00
SBT A300	28x24	MPa 5	mm 589	684	1346	1372	1035*
		Psi 725	inch 23,19	26,93	52,99	54,02	40,75
SBT A300	30x24	MPa 5	mm 591	737	1397	1422	-
		Psi 725	inch 23,27	29,02	55,00	55,98	-
SBT A300	36x30	MPa 5	mm 737	876	1727	1756	-
		Psi 725	inch 29,02	34,49	67,99	69,13	-

\*According to MSS SP44

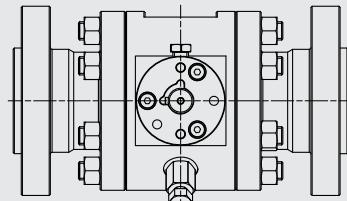
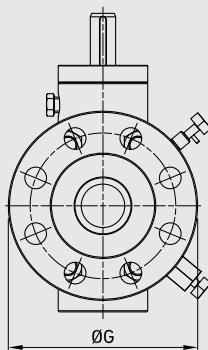
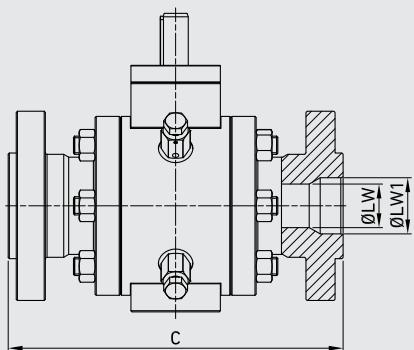


## ■ SBT ANSI 600 FB

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A600	2	MPa 10	mm 49	-	292	295	165
		Psi 1450	inch 1,93	-	11,50	11,61	6,50
SBT A600	2 1/2	MPa 10	mm 62	-	330	333	190
		Psi 1450	inch 2,44	-	12,99	13,11	7,48
SBT A600	3	MPa 10	mm 74	-	356	359	210
		Psi 1450	inch 2,91	-	14,02	14,13	8,27
SBT A600	4	MPa 10	mm 100	-	432	435	275
		Psi 1450	inch 3,94	-	17,01	17,13	10,83


## ■ SBT ANSI 600 RB

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A600	2x1 1/2	MPa 10	mm 38	49	292	295	165
		Psi 1450	inch 1,50	1,93	11,50	11,61	6,50
SBT A600	3x2	MPa 10	mm 49	74	356	359	210
		Psi 1450	inch 1,93	2,91	14,02	14,13	8,27
SBT A600	4x3	MPa 10	mm 74	100	432	435	275
		Psi 1450	inch 2,91	3,94	17,01	17,13	10,83
SBT A600	6x4	MPa 10	mm 100	150	559	562	355
		Psi 1450	inch 3,94	5,91	22,01	22,13	13,98

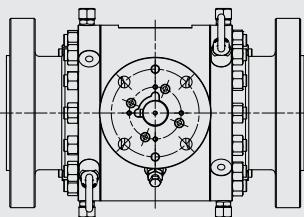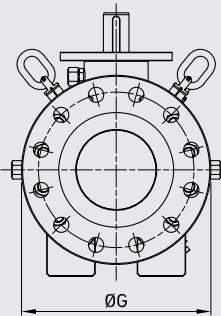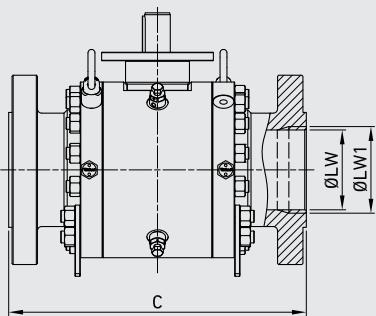

ALSO AVAILABLE IN  
FULLY WELDED VERSION

ANTISTATIC DEVICE



## ■ SBT ANSI 600 FB




TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A600	6	MPa 10	mm 150	-	559	562	35
		Psi 1450	inch 5,91	-	22,01	22,13	1,38
SBT A600	8	MPa 10	mm 201	-	660	664	420
		Psi 1450	inch 7,91	-	25,98	26,14	16,54
SBT A600	10	MPa 10	mm 252	-	787	791	510
		Psi 1450	inch 9,92	-	30,98	31,14	20,08
SBT A600	12	MPa 10	mm 303	-	838	841	560
		Psi 1450	inch 11,93	-	32,99	33,11	22,05
SBT A600	14	MPa 10	mm 334	-	889	892	603,5
		Psi 1450	inch 13,15	-	35,00	35,12	23,76
SBT A600	16	MPa 10	mm 385	-	991	994	686
		Psi 1450	inch 15,16	-	39,02	39,13	27,01
SBT A600	18	MPa 10	mm 436	-	1092	1095	743
		Psi 1450	inch 17,17	-	42,99	43,11	29,25
SBT A600	20	MPa 10	mm 487	-	1194	1200	813
		Psi 1450	inch 19,17	-	47,01	47,24	32,01
SBT A600	22	MPa 10	mm 538	-	1295	1305	870*
		Psi 1450	inch 21,18	-	50,98	51,38	34,25
SBT A600	24	MPa 10	mm 589	-	1397	1407	940
		Psi 1450	inch 23,19	-	55,00	55,39	37,01
SBT A600	26	MPa 10	mm 635	-	1448	1461	-
		Psi 1450	inch 25,00	-	57,01	57,52	-
SBT A600	28	MPa 10	mm 686	-	1549	1562	-
		Psi 1450	inch 27,01	-	60,98	61,50	-
SBT A600	30	MPa 10	mm 737	-	1651	1664	-
		Psi 1450	inch 29,02	-	65,00	65,51	-
SBT A600	32	MPa 10	mm 781	-	1778	1794	-
		Psi 1450	inch 30,75	-	70,00	70,63	-
SBT A600	34	MPa 10	mm 832	-	1930	1946	-
		Psi 1450	inch 32,76	-	75,98	76,61	-
SBT A600	36	MPa 10	mm 876	-	2083	2099	-
		Psi 1450	inch 34,49	-	82,01	82,64	-

\*According to MSS SP44

## ■ SBT ANSI 600 RB

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A600	8x6	MPa 10	mm 150	201	660	664	420
		Psi 1450	inch 5,91	7,91	25,98	26,14	16,54
SBT A600	10x8	MPa 10	mm 201	252	787	791	510
		Psi 1450	inch 7,91	9,92	30,98	31,14	20,08
SBT A600	12x10	MPa 10	mm 252	303	838	841	560
		Psi 1450	inch 9,92	11,93	32,99	33,11	22,05
SBT A600	14x10	MPa 10	mm 252	334	889	892	603,5
		Psi 1450	inch 9,92	13,15	35,00	35,12	23,76
SBT A600	16x12	MPa 10	mm 303	385	991	994	686
		Psi 1450	inch 11,93	15,16	39,02	39,13	27,01
SBT A600	18x14	MPa 10	mm 334	436	1092	1095	743
		Psi 1450	inch 13,15	17,17	42,99	43,11	29,25
SBT A600	20x16	MPa 10	mm 385	487	1194	1200	813
		Psi 1450	inch 15,16	19,17	47,01	47,24	32,01
SBT A600	24x20	MPa 10	mm 487	589	1397	1407	940
		Psi 1450	inch 19,17	23,19	55,00	55,39	37,01
SBT A600	28x24	MPa 10	mm 589	684	1549	1562	1075*
		Psi 1450	inch 23,19	26,93	60,98	61,50	42,32
SBT A600	30x24	MPa 10	mm 591	737	1651	1664	-
		Psi 1450	inch 23,27	29,02	65,00	65,51	-
SBT A600	36x30	MPa 10	mm 737	876	2083	2099	-
		Psi 1450	inch 29,02	34,49	82,01	82,64	-

\*According to MSS SP44

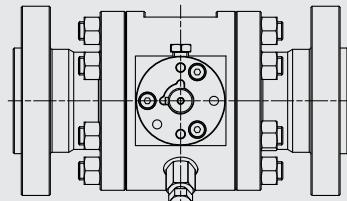
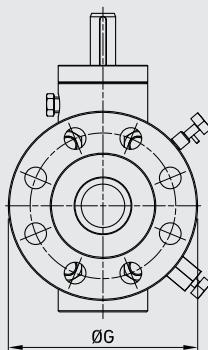
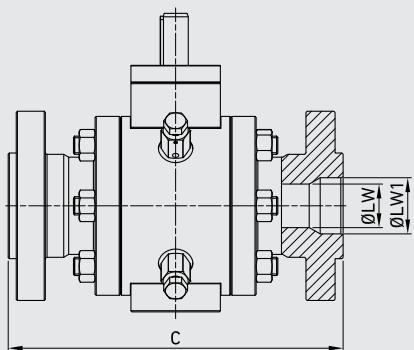


## ■ SBT ANSI 900 FB

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A900	2	MPa 15	mm 49	-	368	371	215
		Psi 2175	inch 1,93	-	14,49	14,61	8,46
SBT A900	2 1/2	MPa 15	mm 62	-	419	422	245
		Psi 2175	inch 2,44	-	16,50	16,61	9,65
SBT A900	3	MPa 15	mm 74	-	381	384	240
		Psi 2175	inch 2,91	-	15,00	15,12	9,45
SBT A900	4	MPa 15	mm 100	-	457	460	290
		Psi 2175	inch 3,94	-	17,99	18,11	11,42


## ■ SBT ANSI 900 RB

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A900	2x1 1/2	MPa 15	mm 38	49	368	371	215
		Psi 2175	inch 1,50	1,93	14,49	14,61	8,46
SBT A900	3x2	MPa 15	mm 49	74	381	384	240
		Psi 2175	inch 1,93	2,91	15,00	15,12	9,45
SBT A900	4x3	MPa 15	mm 74	100	457	460	290
		Psi 2175	inch 2,91	3,94	17,99	18,11	11,42
SBT A900	6x4	MPa 15	mm 100	150	610	613	380
		Psi 2175	inch 3,94	5,91	24,02	24,13	14,96

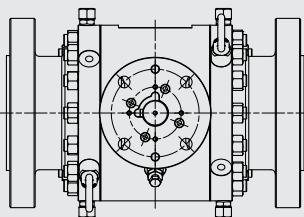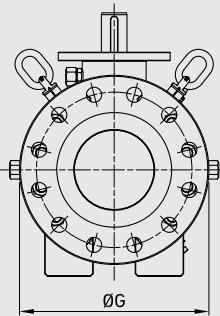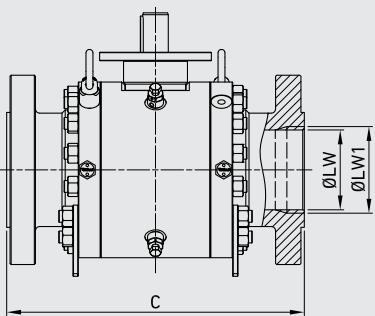

ALSO AVAILABLE IN  
FULLY WELDED VERSION

ANTISTATIC DEVICE







## ■ SBT ANSI 900 FB

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A900	6	MPa 15	mm 150	-	610	613	380
		Psi 2175	inch 5,91	-	24,02	24,13	14,96
SBT A900	8	MPa 15	mm 201	-	737	740	470
		Psi 2175	inch 7,91	-	29,02	29,13	18,50
SBT A900	10	MPa 15	mm 252	-	838	841	545
		Psi 2175	inch 9,92	-	32,99	33,11	21,46
SBT A900	12	MPa 15	mm 303	-	965	968	610
		Psi 2175	inch 11,93	-	37,99	38,11	24,02
SBT A900	14	MPa 15	mm 322	-	1029	1038	641,5
		Psi 2175	inch 12,68	-	40,51	40,87	25,26
SBT A900	16	MPa 15	mm 373	-	1130	1140	705
		Psi 2175	inch 14,69	-	44,49	44,88	27,76
SBT A900	18	MPa 15	mm 423	-	1219	1232	787,5
		Psi 2175	inch 16,65	-	47,99	48,50	31,00
SBT A900	20	MPa 15	mm 471	-	1321	1334	857,5
		Psi 2175	inch 18,54	-	52,01	52,52	33,76
SBT A900	22	MPa 15	mm 522	-	-	-	-
		Psi 2175	inch 20,55	-	-	-	-
SBT A900	24	MPa 15	mm 570	-	1549	1568	1041,5
		Psi 2175	inch 22,44	-	60,98	61,73	41,00
SBT A900	26	MPa 15	mm 619	-	1651	1673	-
		Psi 2175	inch 24,37	-	65,00	65,87	-
SBT A900	28	MPa 15	mm 667	-	1753	1775	-
		Psi 2175	inch 26,26	-	69,02	69,88	-
SBT A900	30	MPa 15	mm 714	-	1880	1902	-
		Psi 2175	inch 28,11	-	74,02	74,88	-
SBT A900	32	MPa 15	mm 762	-	2032	2054	-
		Psi 2175	inch 30,00	-	80,00	80,87	-
SBT A900	34	MPa 15	mm 810	-	2159	2188	-
		Psi 2175	inch 31,89	-	85,00	86,14	-
SBT A900	36	MPa 15	mm 857	-	2286	2315	-
		Psi 2175	inch 33,74	-	90,00	91,14	-

## ■ SBT ANSI 900 RB

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A900	8x6	MPa 15	mm 150	201	737	740	470
		Psi 2175	inch 5,91	7,91	29,02	29,13	18,50
SBT A900	10x8	MPa 15	mm 201	252	838	841	545
		Psi 2175	inch 7,91	9,92	32,99	33,11	21,46
SBT A900	12x10	MPa 15	mm 252	303	965	968	610
		Psi 2175	inch 9,92	11,93	37,99	38,11	24,02
SBT A900	14x10	MPa 15	mm 252	322	1029	1038	641,5
		Psi 2175	inch 9,92	12,68	40,51	40,87	25,26
SBT A900	16x12	MPa 15	mm 303	373	1130	1140	705
		Psi 2175	inch 11,93	14,69	44,49	44,88	27,76
SBT A900	18x14	MPa 15	mm 322	423	1219	1232	787,5
		Psi 2175	inch 12,68	16,65	47,99	48,50	31,00
SBT A900	20x16	MPa 15	mm 373	471	1321	1334	857,5
		Psi 2175	inch 14,69	18,54	52,01	52,52	33,76
SBT A900	24x20	MPa 15	mm 471	570	1549	1568	1041,5
		Psi 2175	inch 18,54	22,44	60,98	61,73	41,00
SBT A900	28x24	MPa 15	mm 570	665	-	-	-
		Psi 2175	inch 22,44	26,18	-	-	-
SBT A900	30x24	MPa 15	mm 572	714	1880	1902	-
		Psi 2175	inch 22,52	28,11	74,02	74,88	-
SBT A900	36x30	MPa 15	mm 714	857	2286	2315	-
		Psi 2175	inch 28,11	33,74	90,00	91,14	-

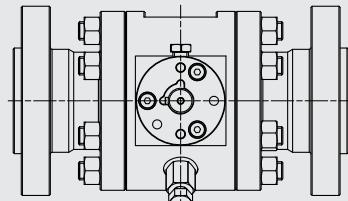
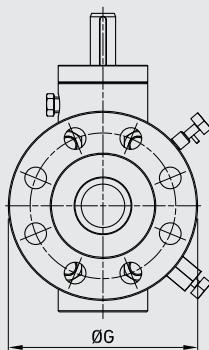
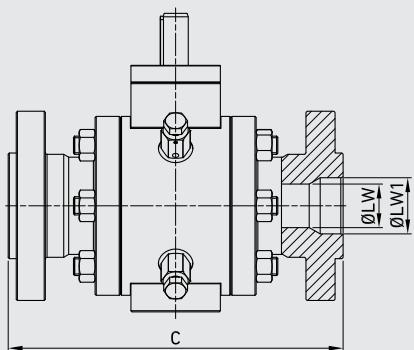


## **■ SBT ANSI 1500 FB**

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A1500	2	MPa 25	mm 49	-	368	371	215
		Psi 3625	inch 1,93	-	14,49	14,61	8,46
SBT A1500	2 1/2	MPa 25	mm 62	-	419	422	245
		Psi 3625	inch 2,44	-	16,50	16,61	9,65
SBT A1500	3	MPa 25	mm 74	-	470	473	265
		Psi 3625	inch 2,91	-	18,50	18,62	10,43
SBT A1500	4	MPa 25	mm 100	-	546	549	310
		Psi 3625	inch 3,94	-	21,50	21,61	12,20


## **■ SBT ANSI 1500 RB**

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A1500	2x1 1/2	MPa 25	mm 38	49	368	371	215
		Psi 3625	inch 1,50	1,93	14,49	14,61	8,46
SBT A1500	3x2	MPa 25	mm 49	74	470	473	265
		Psi 3625	inch 1,93	2,91	18,50	18,62	10,43
SBT A1500	4x3	MPa 25	mm 74	100	546	549	310
		Psi 3625	inch 2,91	3,94	21,50	21,61	12,20
SBT A1500	6x4	MPa 25	mm 100	144	705	711	395
		Psi 3625	inch 3,94	5,67	27,76	27,99	15,55

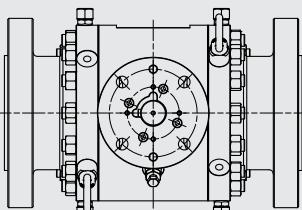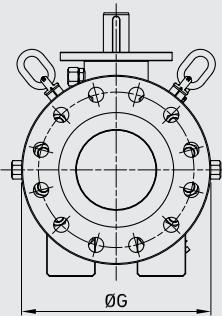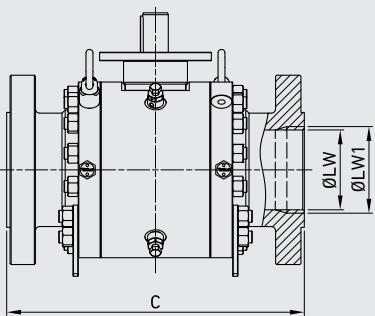

ALSO AVAILABLE IN  
FULLY WELDED VERSION

ANTISTATIC DEVICE






## ■ SBT ANSI 1500 FB

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBTA1500	6	MPa 25	mm 144	-	705	711	395
		Psi 3625	inch 5,67	-	27,76	27,99	15,55
SBTA1500	8	MPa 25	mm 192	-	832	841	485
		Psi 3625	inch 7,56	-	32,76	33,11	19,09
SBTA1500	10	MPa 25	mm 239	-	991	1000	585
		Psi 3625	inch 9,41	-	39,02	39,37	23,03
SBTA1500	12	MPa 25	mm 287	-	1130	1146	675
		Psi 3625	inch 11,30	-	44,49	45,12	26,57
SBTA1500	14	MPa 25	mm 315	-	1257	1276	749,5
		Psi 3625	inch 12,40	-	49,49	50,24	29,51
SBTA1500	16	MPa 25	mm 360	-	1384	1407	825,5
		Psi 3625	inch 14,17	-	54,49	55,39	32,50
SBTA1500	18	MPa 25	mm 406	-	1537	1559	914,5
		Psi 3625	inch 15,98	-	60,51	61,38	36,00
SBTA1500	20	MPa 25	mm 454	-	1664	1686	984,5
		Psi 3625	inch 17,87	-	65,51	66,38	38,76
SBTA1500	22	MPa 25	mm 500	-	-	-	-
		Psi 3625	inch 19,69	-	-	-	-
SBTA1500	24	MPa 25	mm 546	-	-	1972	1168,5
		Psi 3625	inch 21,50	-	-	77,64	46,00

## ■ SBT ANSI 1500 RB

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBTA1500	8x6	MPa 25	mm 144	192	832	841	485
		Psi 3625	inch 5,67	7,56	32,76	33,11	19,09
SBTA1500	10x8	MPa 25	mm 192	239	991	1000	585
		Psi 3625	inch 7,56	9,41	39,02	39,37	23,03
SBTA1500	12x10	MPa 25	mm 239	287	1130	1146	675
		Psi 3625	inch 9,41	11,30	44,49	45,12	26,57
SBTA1500	14x10	MPa 25	mm 239	315	1257	1276	749,5
		Psi 3625	inch 9,41	12,40	49,49	50,24	29,51
SBTA1500	16x12	MPa 25	mm 287	360	1384	1407	825,5
		Psi 3625	inch 11,30	14,17	54,49	55,39	32,50
SBTA1500	18x14	MPa 25	mm 315	406	1537	1559	914,5
		Psi 3625	inch 12,40	15,98	60,51	61,38	36,00
SBTA1500	20x16	MPa 25	mm 360	454	1664	1686	984,5
		Psi 3625	inch 14,17	17,87	65,51	65,67	38,76
SBTA1500	24x20	MPa 25	mm 454	546	-	1972	1168,5
		Psi 3625	inch 17,87	21,50	-	77,64	46,00
SBTA1500	28x24	MPa 25	mm 546	641	-	-	-
		Psi 3625	inch 21,50	25,24	-	-	-
SBTA1500	30x24	MPa 25	mm 546	686	-	-	-
		Psi 3625	inch 21,50	27,01	-	-	-

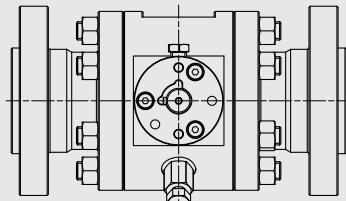
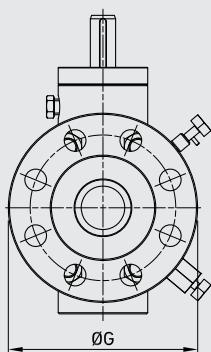
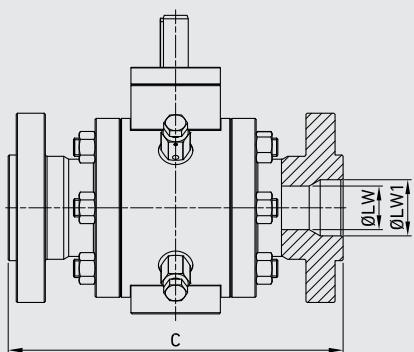


## **■ SBT ANSI 2500 FB**

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A2500	2	MPa 42	mm 42	-	451	454	235
		Psi 6090	inch 1,65	-	17,76	17,87	9,25
SBT A2500	2 1/2	MPa 42	mm 52	-	508	514	265
		Psi 6090	inch 2,05	-	20,00	20,24	10,43
SBT A2500	3	MPa 42	mm 62	-	578	584	305
		Psi 6090	inch 2,44	-	22,76	22,99	12,01
SBT A2500	4	MPa 42	mm 87	-	673	683	355
		Psi 6090	inch 3,43	-	26,50	26,89	13,98


## **■ SBT ANSI 2500 RB**

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A2500	2x1 1/2	MPa 42	mm 38	42	451	454	235
		Psi 6090	inch 1,50	1,65	17,76	17,87	9,25
SBT A2500	3x2	MPa 42	mm 42	62	578	584	305
		Psi 6090	inch 1,65	2,44	22,76	22,99	12,01
SBT A2500	4x3	MPa 42	mm 62	87	673	683	355
		Psi 6090	inch 2,44	3,43	26,50	26,89	13,98
SBT A2500	6x4	MPa 42	mm 87	131	914	927	485
		Psi 6090	inch 3,43	5,16	35,98	36,50	19,09

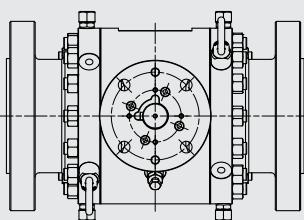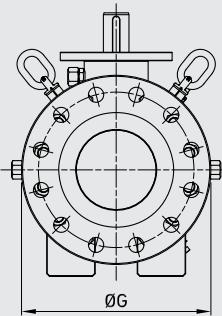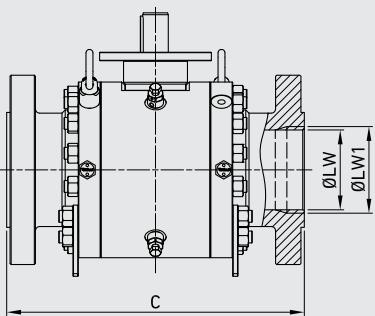

ALSO AVAILABLE IN  
FULLY WELDED VERSION

ANTISTATIC DEVICE



## ■ SBT ANSI 2500 FB

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A2500	6	MPa 42	mm 131	-	914	927	485
		Psi 6090	inch 5,16	-	35,98	36,50	19,09
SBT A2500	8	MPa 42	mm 179	-	1022	1038	550
		Psi 6090	inch 7,05	-	40,24	40,87	21,65
SBT A2500	10	MPa 42	mm 223	-	1270	1294	675
		Psi 6090	inch 8,78	-	50,00	50,94	26,57
SBT A2500	12	MPa 42	mm 265	-	1422	1445	760
		Psi 6090	inch 10,43	-	55,98	56,89	29,92
SBT A2500	14	MPa 42	mm 292	-	-	-	-
		Psi 6090	inch 11,50	-	-	-	-
SBT A2500	16	MPa 42	mm 333	-	-	-	-
		Psi 6090	inch 13,11	-	-	-	-
SBT A2500	18	MPa 42	mm 374	-	-	-	-
		Psi 6090	inch 14,72	-	-	-	-
SBT A2500	20	MPa 42	mm 419	-	-	-	-
		Psi 6090	inch 16,50	-	-	-	-

## ■ SBT ANSI 2500 RB

TYPE	INCH	PN	ØLW	ØLW1	C RF	C RTJ	ØG
SBT A2500	8x6	MPa 42	mm 131	179	1022	1038	550
		Psi 6090	inch 5,16	7,05	40,24	40,87	21,65
SBT A2500	10x8	MPa 42	mm 179	223	1270	1292	675
		Psi 6090	inch 7,05	8,78	50,00	50,87	26,57
SBT A2500	12x10	MPa 42	mm 223	265	1422	1445	760
		Psi 6090	inch 8,78	10,43	55,98	56,89	29,92
SBT A2500	14x10	MPa 42	mm 223	292	-	-	-
		Psi 6090	inch 8,78	11,50	-	-	-
SBT A2500	16x12	MPa 42	mm 265	333	-	-	-
		Psi 6090	inch 10,43	13,11	-	-	-
SBT A2500	18x14	MPa 42	mm 292	374	-	-	-
		Psi 6090	inch 11,50	14,72	-	-	-
SBT A2500	20x16	MPa 42	mm 333	419	-	-	-
		Psi 6090	inch 13,11	16,50	-	-	-



## DBB

## DOUBLE BLOCK AND BLEED

Edition. 21.0


CS Carbon Steel

SS Stainless Steel

## • CS, SS, DSS, ALLOY (Forged)

- Type: ball valve Double Block and Bleed
- Sizes: from DN13 up to DN200
- Pressure: ANSI 150-2500
- Temperature: from -50° up to +200° (depending on materials selected)

## STANDARD COMPOSITION OF VALVE

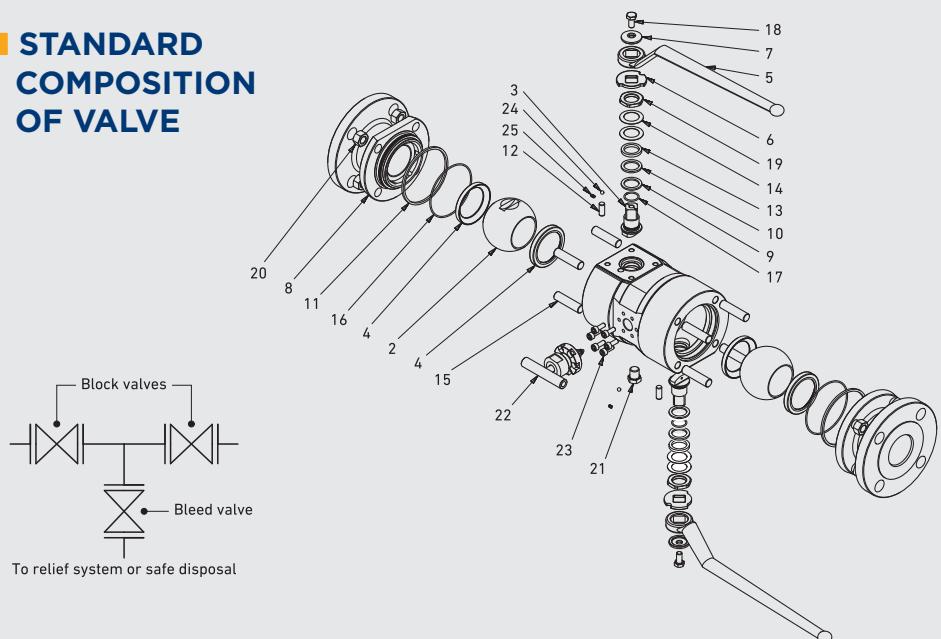

POS	DESCRIPTION	Q.TY	CS	SS	CS	SS
			Carbon Steel	Stainless Steel	Carbon Steel	Stainless Steel
1	Body	1	ASTM A350 LF2	ASTM A479 Tp.316	13	AISI 316
2	Ball	2	ASTM A479 Tp.316	ASTM A479 Tp.316	14	AISI 316
3	Stem	2	ASTM A479 Tp.316	ASTM A479 Tp.316	15	ASTM A320 L7M
4	Ball seat	4	RPTFE	RPTFE	16	FKM
5	Handle	2	Fe37	Fe37	17	FKM
6	Washer	2	AISI 316	AISI 316	18	ISO 4017 A4
7	Washer	2	AISI 316	AISI 316	19	ISO 4017 A4
8	Flange	2	ASTM A350 LF2	ASTM A479 Tp.316	20	AISI 316
9	Stem ring	2	PTFE	PTFE	21	AISI 316
10	Stem ring	2	Graphite	Graphite	22	AISI 316
11	Flange ring	2	Graphite	Graphite	23	AISI 316
12	Pin	2	AISI 316	AISI 316	24	AISI 316



## CODE DESCRIPTION STRUCTURE

<b>DBB</b>	<b>ANSI600</b>	<b>2"</b>	<b>DN50</b>	<b>FB</b>	<b>LF2</b>	<b>F316</b>	<b>RPTFE</b>	<b>FKM</b>	<b>RF</b>
------------	----------------	-----------	-------------	-----------	------------	-------------	--------------	------------	-----------

**Type and way of valve**

DBB Double block and bleed

**Valves dimension of pressure (LBS)**

ANSI150

ANSI300

ANSI600

ANSI900

ANSI1500

ANSI2500

**Sizes**

from 1/2" to 8"

**Sizes**

from DN13 to DN200

**Bore**

FB full bore

RB reduce bore

**Body material**

● A105\*      LF2

● F316

**Stem material**

● F316   A105\*   LF2\*   F51\*

● F316   F51\*

**Ball seat material**


RPTFE   PEEK\*   POM\*   DEVLON\*   MET-TO-MET\*

**Adapter and stem seal material**

FKM   NBR\*   EPDM\*   MVQ\*

**Flanged**

RF   RTJ\*   BW\*   FF\*

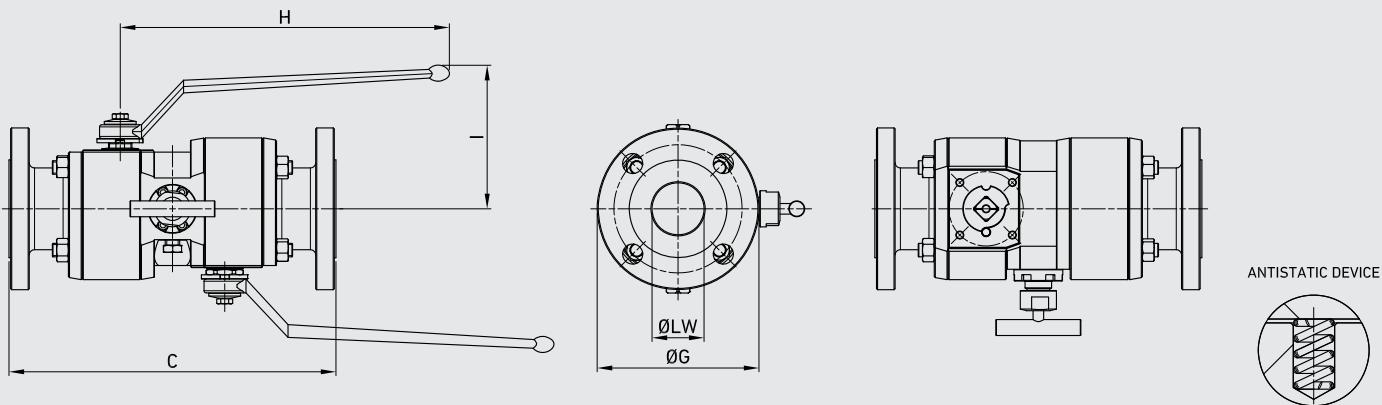

## DBB 150 FB

TYPE	INCH	PN	ØLW	ØLW1	CRF	C RTJ	ØG	H	I
FLOATING	1/2	MPa 2	mm 13	-	194,4	214,2	90	225	110
		Psi 290	inch 0,51	-	7,65	8,43	3,54	8,86	4,33
FLOATING	3/4	MPa 2	mm 20	-	210,6	234	100	228	112
		Psi 290	inch 0,79	-	8,29	9,21	3,94	8,98	4,41
FLOATING	1	MPa 2	mm 25	-	228,6	252	110	233	116
		Psi 290	inch 0,98	-	9,00	9,92	4,33	9,17	4,57
FLOATING	1 1/2	MPa 2	mm 38	-	297	320,4	125	305	135
		Psi 290	inch 1,50	-	11,69	12,61	4,92	12,01	5,31
FLOATING	2	MPa 2	mm 49	-	320,4	343,8	150	310	145
		Psi 290	inch 1,93	-	12,61	13,54	5,91	12,20	5,71
FLOATING	3	MPa 2	mm 74	-	365,4	388,8	190	520	190
		Psi 290	inch 2,91	-	14,39	15,31	7,48	20,47	7,48
FLOATING	4	MPa 2	mm 95	-	412,2	435,6	230	535	210
		Psi 290	inch 3,74	-	16,23	17,15	9,06	21,06	8,27
FLOATING	6	MPa 2	mm 150	-	709,2	732,6	280	-	250
		Psi 290	inch 5,91	-	27,92	28,84	11,02	-	9,84
TRUNNION	8	MPa 2	mm 201	-	822,6	846	345	-	280
		Psi 290	inch 7,91	-	32,39	33,31	13,58	-	11,02
TRUNNION	10	MPa 2	mm 252	-	-	-	-	-	-
		Psi 290	inch 9,92	-	-	-	-	-	-

## DBB 150 RB


TYPE	INCH	PN	ØLW	ØLW1	CRF	C RTJ	ØG	H	I
FLOATING	3/4 x 1/2	MPa 2	mm 13	20	210,6	234	100	225	110
		Psi 290	inch 0,51	0,79	8,29	9,21	3,94	8,86	4,33
FLOATING	1 x 3/4	MPa 2	mm 20	25	228,6	252	110	228	112
		Psi 290	inch 0,79	0,98	9,00	9,92	4,33	8,98	4,41
FLOATING	1 1/2 x 1	MPa 2	mm 25	38	297	320,4	125	233	116
		Psi 290	inch 0,98	1,50	11,69	12,61	4,92	9,17	4,57
FLOATING	2 x 1	MPa 2	mm 38	49	320,4	343,8	150	305	135
		Psi 290	inch 1,50	1,93	12,61	13,54	5,91	12,01	5,31
FLOATING	3x2	MPa 2	mm 49	74	365,4	388,8	190	310	145
		Psi 290	inch 1,93	2,91	14,39	15,31	7,48	12,20	5,71
FLOATING	4x3	MPa 2	mm 74	95	412,2	435,6	230	520	190
		Psi 290	inch 2,91	3,74	16,23	17,15	9,06	20,47	7,48
FLOATING	6x4	MPa 2	mm 95	150	709,2	732,6	280	535	210
		Psi 290	inch 3,74	5,91	27,92	28,84	11,02	21,06	8,27
FLOATING	8x6	MPa 2	mm 150	201	822,6	846	345	870	250
		Psi 290	inch 5,91	7,91	32,39	33,31	13,58	34,25	9,84

## DBB 300 FB

TYPE	INCH	PN	ØLW	ØLW1	CRF	CRTJ	ØG	H	I
FLOATING	1/2	MPa 5	mm 13	-	252	271,8	95	225	110
		Psi 725	inch 0,51	-	9,92	10,70	3,74	8,86	4,33
FLOATING	3/4	MPa 5	mm 20	-	273,6	297	115	228	112
		Psi 725	inch 0,79	-	10,77	11,69	4,53	8,98	4,41
FLOATING	1	MPa 5	mm 25	-	297	320,4	125	233	116
		Psi 725	inch 0,98	-	11,69	12,61	4,92	9,17	4,57
FLOATING	1 1/2	MPa 5	mm 38	-	343,8	365,4	155	305	135
		Psi 725	inch 1,50	-	13,54	14,39	6,10	12,01	5,31
FLOATING	2	MPa 5	mm 49	-	388,8	417,6	165	310	145
		Psi 725	inch 1,93	-	15,31	16,44	6,50	12,20	5,71
FLOATING	3	MPa 5	mm 74	-	509,4	538,2	210	520	190
		Psi 725	inch 2,91	-	20,06	21,19	8,27	20,47	7,48
FLOATING	4	MPa 5	mm 95	-	549	577,8	255	535	210
		Psi 725	inch 3,74	-	21,61	22,75	10,04	21,06	8,27
FLOATING	6	MPa 5	mm 150	-	725,4	754,2	320	-	250
		Psi 725	inch 5,91	-	28,56	29,69	12,60	-	9,84
TRUNNION	8	MPa 5	mm 201	-	903,6	932,4	380	-	280
		Psi 725	inch 7,91	-	35,57	36,71	14,96	-	11,02
TRUNNION	10	MPa 5	mm 252	-	1022,4	1051,2	445	-	-
		Psi 725	inch 9,92	-	40,25	41,39	17,52	-	-

## DBB 300 RB

TYPE	INCH	PN	ØLW	ØLW1	CRF	CRTJ	ØG	H	I
FLOATING	3/4 x 1/2	MPa 5	mm 13	20	273,6	297	115	225	110
		Psi 725	inch 0,51	0,79	10,77	11,69	4,53	8,86	4,33
FLOATING	1 x 3/4	MPa 5	mm 20	25	297	267	125	228	112
		Psi 725	inch 0,79	0,98	11,69	10,51	4,92	8,98	4,41
FLOATING	1 1/2 x 1	MPa 5	mm 25	38	343,8	365,4	155	233	116
		Psi 725	inch 0,98	1,50	13,54	14,39	6,10	9,17	4,57
FLOATING	2 x 1 1/2	MPa 5	mm 38	49	388,8	417,6	165	305	135
		Psi 725	inch 1,50	1,93	15,31	16,44	6,50	12,01	5,31
FLOATING	3x2	MPa 5	mm 49	74	509,4	538,2	210	310	145
		Psi 725	inch 1,93	2,91	20,06	21,19	8,27	12,20	5,71
FLOATING	4x3	MPa 5	mm 74	95	549	577,8	255	520	190
		Psi 725	inch 2,91	3,74	21,61	22,75	10,04	20,47	7,48
FLOATING	6x4	MPa 5	mm 95	150	725,4	754,2	320	535	210
		Psi 725	inch 3,74	5,91	28,56	29,69	12,60	21,06	8,27
FLOATING	8x6	MPa 5	mm 150	201	903,6	932,2	380	-	250
		Psi 725	inch 5,91	7,91	35,57	36,70	14,96	-	9,84

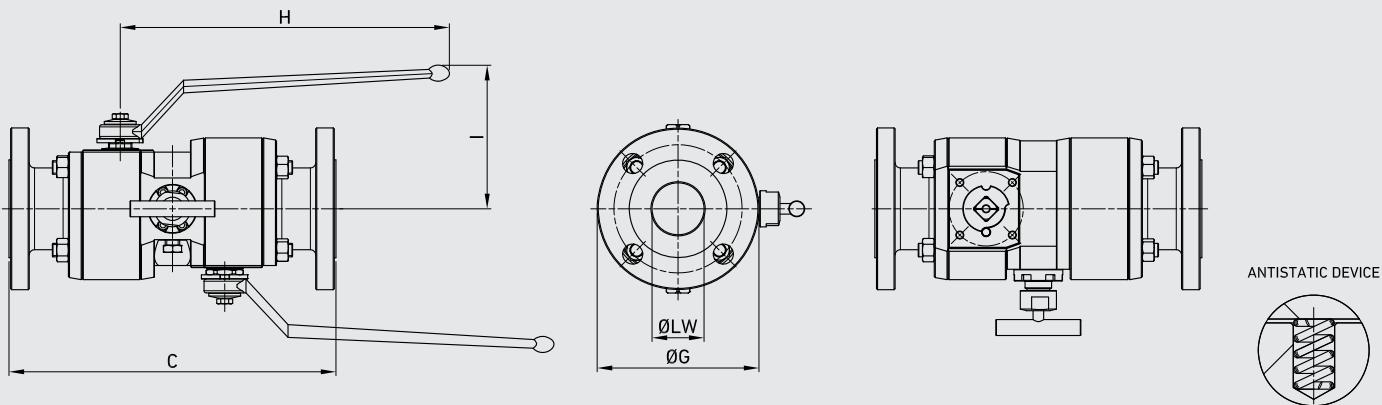

## DBB 600 FB

TYPE	INCH	PN	ØLW	ØLW1	CRF	C RTJ	ØG	H	I
FLOATING	1/2	MPa 10	mm 13	-	228	226	95	225	110
		Psi 1450	inch 0,51	-	8,98	8,90	3,74	8,86	4,33
FLOATING	3/4	MPa 10	mm 20	-	234	234	115	228	112
		Psi 1450	inch 0,79	-	9,21	9,21	4,53	8,98	4,41
FLOATING	1	MPa 10	mm 25	-	252	252	125	233	116
		Psi 1450	inch 0,98	-	9,92	9,92	4,92	9,17	4,57
FLOATING	1 1/2	MPa 10	mm 38	-	325	325	155	305	135
		Psi 1450	inch 1,50	-	12,80	12,80	6,10	12,01	5,31
FLOATING	2	MPa 10	mm 49	-	353	356	165	310	145
		Psi 1450	inch 1,93	-	13,90	14,02	6,50	12,20	5,71
FLOATING	3	MPa 10	mm 74	-	462	465	210	520	190
		Psi 1450	inch 2,91	-	18,19	18,31	8,27	20,47	7,48
FLOATING	4	MPa 10	mm 95	-	697	700	275	-	197
		Psi 1450	inch 3,74	-	27,44	27,56	10,83	-	7,76
FLOATING	6	MPa 10	mm 150	-	877	880	355	-	250
		Psi 1450	inch 5,91	-	34,53	34,65	13,98	-	9,84
TRUNNION	8	MPa 10	mm 201	-	1050	1053	420	-	290
		Psi 1450	inch 7,91	-	41,34	41,46	16,54	-	11,42
TRUNNION	10	MPa 10	mm 252	-	1259,2	1265,6	510	-	-
		Psi 1450	inch 9,92	-	49,57	49,83	20,08	-	-

## DBB 600 RB


TYPE	INCH	PN	ØLW	ØLW1	CRF	C RTJ	ØG	H	I
FLOATING	3/4 x1/2	MPa 10	mm 13	20	230	230	115	225	110
		Psi 1450	inch 0,51	0,79	9,06	9,06	4,53	8,86	4,33
FLOATING	1 x 3/4	MPa 10	mm 20	25	238	238	125	228	112
		Psi 1450	inch 0,79	0,98	9,37	9,37	4,92	8,98	4,41
FLOATING	1 1/2 x1	MPa 10	mm 25	38	262	262	155	233	116
		Psi 1450	inch 0,98	1,50	10,31	10,31	6,10	9,17	4,57
FLOATING	2 x 1 1/2	MPa 10	mm 38	49	332	338	165	305	135
		Psi 1450	inch 1,50	1,93	13,07	13,31	6,50	12,01	5,31
FLOATING	3x2	MPa 10	mm 49	74	368	371	210	310	145
		Psi 1450	inch 1,93	2,91	14,49	14,61	8,27	12,20	5,71
FLOATING	4x3	MPa 10	mm 74	95	477	480	275	520	190
		Psi 1450	inch 2,91	3,74	18,78	18,90	10,83	20,47	7,48
FLOATING	6x4	MPa 10	mm 95	150	727	730	355	-	197
		Psi 1450	inch 3,74	5,91	28,62	28,74	13,98	-	7,76
FLOATING	8x6	MPa 10	mm 150	201	907	910	420	-	250
		Psi 1450	inch 5,91	7,91	35,71	35,83	16,54	-	9,84

## DBB 900 FB

TYPE	INCH	PN	ØLW	ØLW1	CRF	CRTJ	ØG	H	I
FLOATING	1/2	MPa 15	mm 13	-	276	276	120	225	112
		Psi 2175	inch 0,51	-	10,87	10,87	4,72	8,86	4,41
FLOATING	3/4	MPa 15	mm 20	-	287	287	130	228	114
		Psi 2175	inch 0,79	-	11,30	11,30	5,12	8,98	4,49
FLOATING	1	MPa 15	mm 25	-	330	330	150	295	122
		Psi 2175	inch 0,98	-	12,99	12,99	5,91	11,61	4,80
FLOATING	1 1/2	MPa 15	mm 38	-	400	400	180	410	155
		Psi 2175	inch 1,50	-	15,75	15,75	7,09	16,14	6,10
FLOATING	2	MPa 15	mm 49	-	464	467	215	415	162
		Psi 2175	inch 1,93	-	18,27	18,39	8,46	16,34	6,38
FLOATING	3	MPa 15	mm 74	-	647	650	240	-	180
		Psi 2175	inch 2,91	-	25,47	25,59	9,45	-	7,09
FLOATING	4	MPa 15	mm 95	-	747	750	290	-	220
		Psi 2175	inch 3,74	-	29,41	29,53	11,42	-	8,66
FLOATING	6	MPa 15	mm 150	-	977	980	380	-	260
		Psi 2175	inch 5,91	-	38,46	38,58	14,96	-	10,24
TRUNNION	8	MPa 15	mm 201	-	1197	1200	470	-	300
		Psi 2175	inch 7,91	-	47,13	47,24	18,50	-	11,81
TRUNNION	10	MPa 15	mm 252	-	1340,8	1513,8	545	-	-
		Psi 2175	inch 9,92	-	52,79	59,60	21,46	-	-

## DBB 900 RB

TYPE	INCH	PN	ØLW	ØLW1	CRF	CRTJ	ØG	H	I
FLOATING	3/4 x 1/2	MPa 15	mm 13	20	282	282	130	225	112
		Psi 2175	inch 0,51	0,79	11,10	11,10	5,12	8,86	4,41
FLOATING	1 x 3/4	MPa 15	mm 20	25	295	295	150	228	114
		Psi 2175	inch 0,79	0,98	11,61	11,61	5,91	8,98	4,49
FLOATING	1 1/2 x 1	MPa 15	mm 25	38	340	340	180	295	122
		Psi 2175	inch 0,98	1,50	13,39	13,39	7,09	11,61	4,80
FLOATING	2 x 1 1/2	MPa 15	mm 38	49	412	415	215	410	155
		Psi 2175	inch 1,50	1,93	16,22	16,34	8,46	16,14	6,10
FLOATING	3x2	MPa 15	mm 49	74	442	445	240	415	162
		Psi 2175	inch 1,93	2,91	17,40	17,52	9,45	16,34	6,38
FLOATING	4x3	MPa 15	mm 74	95	662	665	290	-	180
		Psi 2175	inch 2,91	3,74	26,06	26,18	11,42	-	7,09
FLOATING	6x4	MPa 15	mm 95	150	772	775	380	-	220
		Psi 2175	inch 3,74	5,91	30,39	30,51	14,96	-	8,66
TRUNNION	8x6	MPa 15	mm 150	201	1017	1020	470	-	260
		Psi 2175	inch 5,91	7,91	40,04	40,16	18,50	-	10,24

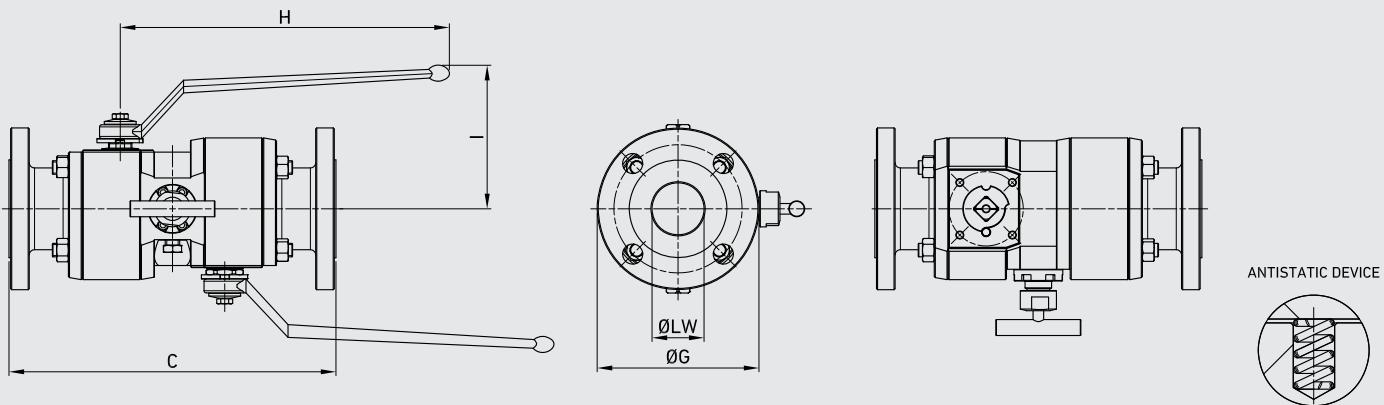

## DBB 1500 FB

TYPE	INCH	PN	ØLW	ØLW1	CRF	C RTJ	ØG	H	I
FLOATING	1/2	MPa 25	mm 13	-	276	276	120	225	112
		Psi 3625	inch 0,51	-	10,87	10,87	4,72	8,86	4,41
FLOATING	3/4	MPa 25	mm 20	-	287	287	130	228	114
		Psi 3625	inch 0,79	-	11,30	11,30	5,12	8,98	4,49
FLOATING	1	MPa 25	mm 25	-	330	330	150	295	122
		Psi 3625	inch 0,98	-	12,99	12,99	5,91	11,61	4,80
FLOATING	1 1/2	MPa 25	mm 38	-	400	400	180	410	155
		Psi 3625	inch 1,50	-	15,75	15,75	7,09	16,14	6,10
FLOATING	2	MPa 25	mm 49	-	464	467	215	415	162
		Psi 3625	inch 1,93	-	18,27	18,39	8,46	16,34	6,38
FLOATING	3	MPa 25	mm 74	-	697	700	265	-	180
		Psi 3625	inch 2,91	-	27,44	27,56	10,43	-	7,09
FLOATING	4	MPa 25	mm 95	-	827	830	310	-	220
		Psi 3625	inch 3,74	-	32,56	32,68	12,20	-	8,66
FLOATING	6	MPa 25	mm 144	-	1084	1090	395	-	270
		Psi 3625	inch 5,67	-	42,68	42,91	15,55	-	10,63
TRUNNION	8	MPa 25	mm 192	-	1340	1350	485	-	310
		Psi 3625	inch 7,56	-	52,76	53,15	19,09	-	12,20
TRUNNION	10	MPa 25	mm 239	-	1585,6	1600	585	-	-
		Psi 3625	inch 9,41	-	62,43	62,99	23,03	-	-

## DBB 1500 RB

TYPE	INCH	PN	ØLW	ØLW1	CRF	C RTJ	ØG	H	I
FLOATING	3/4 x 1/2	MPa 25	mm 13	20	282	282	130	225	112
		Psi 3625	inch 0,51	0,79	11,10	11,10	5,12	8,86	4,41
FLOATING	1 x 3/4	MPa 25	mm 20	25	295	295	150	228	114
		Psi 3625	inch 0,79	0,98	11,61	11,61	5,91	8,98	4,49
FLOATING	1 1/2 x 1	MPa 25	mm 25	38	340	340	180	295	122
		Psi 3625	inch 0,98	1,50	13,39	13,39	7,09	11,61	4,80
FLOATING	2 x 1	MPa 25	mm 38	49	412	415	215	410	155
		Psi 3625	inch 1,50	1,93	16,22	16,34	8,46	16,14	6,10
FLOATING	3x2	MPa 25	mm 49	74	737	740	265	415	162
		Psi 3625	inch 1,93	2,91	29,02	29,13	10,43	16,34	6,38
FLOATING	4x3	MPa 25	mm 74	95	894	900	310	-	180
		Psi 3625	inch 2,91	3,74	35,20	35,43	12,20	-	7,09
FLOATING	6x4	MPa 25	mm 95	144	1120	1130	395	-	220
		Psi 3625	inch 3,74	5,67	44,09	44,49	15,55	-	8,66
TRUNNION	8x6	MPa 25	mm 144	192	-	-	485	-	270
		Psi 3625	inch 5,67	7,56	-	-	19,09	-	10,63

## DBB 2500 FB

TYPE	INCH	PN	ØLW	ØLW1	CRF	CRTJ	ØG	H	I
FLOATING	1/2	MPa 42	mm 13	-	291	291	135	225	112
		Psi 6090	inch 0,51	-	11,46	11,46	5,31	8,86	4,41
FLOATING	3/4	MPa 42	mm 20	-	300	300	140	228	114
		Psi 6090	inch 0,79	-	11,81	11,81	5,51	8,98	4,49
FLOATING	1	MPa 42	mm 25	-	350	350	160	295	122
		Psi 6090	inch 0,98	-	13,78	13,78	6,30	11,61	4,80
FLOATING	1 1/2	MPa 42	mm 38	-	565	565	205	-	100
		Psi 6090	inch 1,50	-	22,24	22,24	8,07	-	3,94
FLOATING	2	MPa 42	mm 42	-	652	655	235	-	125
		Psi 6090	inch 1,65	-	25,67	25,79	9,25	-	4,92
FLOATING	3	MPa 42	mm 62	-	864	870	305	-	190
		Psi 6090	inch 2,44	-	34,02	34,25	12,01	-	7,48
FLOATING	4	MPa 42	mm 87	-	990	1000	355	-	240
		Psi 6090	inch 3,43	-	38,98	39,37	13,98	-	9,45
FLOATING	6	MPa 42	mm 131	-	1317	1330	485	-	280
		Psi 6090	inch 5,16	-	51,85	52,36	19,09	-	11,02
TRUNNION	8	MPa 42	mm 179	-	1484	1500	550	-	380
		Psi 6090	inch 7,05	-	58,43	59,06	21,65	-	14,96
TRUNNION	10	MPa 42	mm 223	-	1905	1941	675	-	-
		Psi 6090	inch 8,78	-	75,00	76,42	26,57	-	-

## DBB 2500 RB

TYPE	INCH	PN	ØLW	ØLW1	CRF	CRTJ	ØG	H	I
FLOATING	3/4 x 1/2	MPa 42	mm 13	20	294	294	140	225	112
		Psi 6090	inch 0,51	0,79	11,57	11,57	5,51	8,86	4,41
FLOATING	1 x 3/4	MPa 42	mm 20	25	310	310	160	228	114
		Psi 6090	inch 0,79	0,98	12,20	12,20	6,30	8,98	4,49
FLOATING	1 1/2 x 1	MPa 42	mm 25	38	370	373	205	295	122
		Psi 6090	inch 0,98	1,50	14,57	14,69	8,07	11,61	4,80
FLOATING	2 x 1 1/2	MPa 42	mm 38	42	577	580	235	-	100
		Psi 6090	inch 1,50	1,65	22,72	22,83	9,25	-	3,94
FLOATING	3x2	MPa 42	mm 42	62	694	700	305	-	125
		Psi 6090	inch 1,65	2,44	27,32	27,56	12,01	-	4,92
FLOATING	4x3	MPa 42	mm 62	87	890	900	355	-	190
		Psi 6090	inch 2,44	3,43	35,04	35,43	13,98	-	7,48
FLOATING	6x4	MPa 42	mm 87	131	1067	1080	485	-	240
		Psi 6090	inch 3,43	5,16	42,01	42,52	19,09	-	9,45
TRUNNION	8x6	MPa 42	mm 131	179	1384	1400	675	-	280
		Psi 6090	inch 5,16	7,05	54,49	55,12	26,57	-	11,02





# KITS

**GEMELS**, with its product package, also provides to its customers Spare Parts, such as levers, locking devices, actuators and limit switches. In this way, **GEMELS** supplies a complete package and is able to provide a service to customers from all over the world, especially thanks to its knowledge of the field and of the multiple applications.




# LOCKING DEVICE

Edition. 21.0


- **LKB** FOR GM - GN
- **LKF** FOR GE - GB - GHP - GPK
- **LKR** FOR GR
- **SECURITY BLOCK** FOR GE - GB  
GHP - GPK (except DN6) - G3/4K
- **LKS** FOR SBF - SBF-W



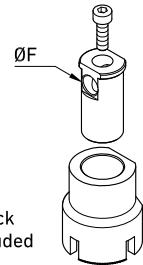

### LKB FOR GM - GN

TYPE	DN	SW	ØF	MATERIAL	TREATMENT	WEIGHT	ITEM CODE
LK6-B	6-10-13	mm	9	CARBON STEEL	GALVANIZED	kg	0,178
		inch	0,35			lb	0,39
LK6-B	6-10-13	mm	9	STAINLESS STEEL	-	kg	0,178
		inch	0,35			lb	0,39
LK20-B	20-25	mm	14	CARBON STEEL	GALVANIZED	kg	0,413
		inch	0,55			lb	0,91
LK20-B	20-25	mm	14	STAINLESS STEEL	-	kg	0,413
		inch	0,55			lb	0,91
LK32-B	32-40-50	mm	17	CARBON STEEL	GALVANIZED	kg	0,53
		inch	0,67			lb	1,17
LK32-B	32-40-50	mm	17	STAINLESS STEEL	-	kg	0,53
		inch	0,67			lb	1,17

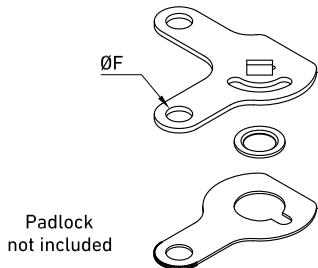


### LKF FOR GE - GB - GHP - GPK

TYPE	DN	SW	ØF	MATERIAL	TREATMENT	WEIGHT	ITEM CODE
LK6-MF	6 only for GPK	mm	6	CARBON STEEL	GALVANIZED	kg	0,043
		inch	0,24			lb	0,09
LK6-F	6-10-13	mm	9	CARBON STEEL	GALVANIZED	kg	0,043
		inch	0,35			lb	0,09
LK6-F	6-10-13	mm	9	STAINLESS STEEL	-	kg	0,043
		inch	0,35			lb	0,09
LK20-F	20-25	mm	14	CARBON STEEL	GALVANIZED	kg	0,121
		inch	0,55			lb	0,27
LK20-F	20-25	mm	14	STAINLESS STEEL	-	kg	0,121
		inch	0,55			lb	0,27
LK32-F	32-40-50	mm	17	CARBON STEEL	GALVANIZED	kg	0,187
		inch	0,67			lb	0,41
LK32-F	32-40-50	mm	17	STAINLESS STEEL	-	kg	0,187
		inch	0,67			lb	0,41




Padlock  
not included

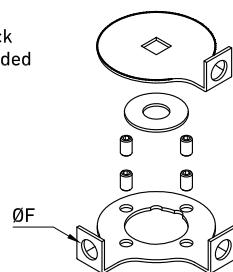


### LKR FOR GR

TYPE	DN	SW	ØF	MATERIAL	TREATMENT	WEIGHT	ITEM CODE
LKR13	13	mm 9	9,5	CARBON STEEL	GALVANIZED	kg 0,1	KOK00LKR132Z
		inch 0,35	0,37			lb 0,22	
LKR13	13	mm 9	9,5	STAINLESS STEEL	-	kg 0,1	KOK00LKR136H
		inch 0,35	0,37			lb 0,22	
LKR20	20-25	mm 14	9,5	CARBON STEEL	GALVANIZED	kg 0,18	KOK00LKR202Z
		inch 0,55	0,37			lb 0,40	
LKR20	20-25	mm 14	9,5	STAINLESS STEEL	-	kg 0,18	KOK00LKR206H
		inch 0,55	0,37			lb 0,40	
LKR32	32-40-50	mm 17	9,5	CARBON STEEL	GALVANIZED	kg 0,34	KOK00LKR322Z
		inch 0,67	0,37			lb 0,75	
LKR32	32-40-50	mm 17	9,5	STAINLESS STEEL	-	kg 0,34	KOK00LKR326H
		inch 0,67	0,37			lb 0,75	
LKR65	65-80	mm 19	9,5	CARBON STEEL	GALVANIZED	kg 0,55	KOK00LKR652Z
		inch 0,75	0,37			lb 1,21	
LKR65	65-80	mm 19	9,5	STAINLESS STEEL	-	kg 0,55	KOK00LKR656H
		inch 0,75	0,37			lb 1,21	
LKR100	100	mm 24	9,5	CARBON STEEL	GALVANIZED	kg 1,08	KOK00LKR1002Z
		inch 0,94	0,37			lb 2,38	
LKR100	100	mm 24	9,5	STAINLESS STEEL	-	kg 1,08	KOK00LKR1006H
		inch 0,94	0,37			lb 2,38	

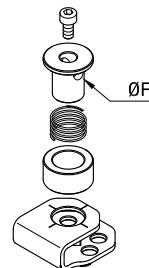


### SECURITY BLOCK FOR GE - GB - GHP - GPK (EXCEPT DN6) - G3/4K

TYPE	DN	SW	ØF	MATERIAL	TREATMENT	WEIGHT	ITEM CODE
SB6	6-10-13 6 only for G3/4K	mm 6	6,8	CARBON STEEL	GALVANIZED	kg 0,066	KOB00SB61Z
		inch 0,24	0,27			lb 0,15	
SB20	20-25 10-13-20 only for G3/4K	mm 9	9,5	CARBON STEEL	GALVANIZED	kg 0,221	KOB00SB201Z
		inch 0,35	0,37			lb 0,49	
SB32	32-40-50 25 only for G3/4K	mm 17	9,5	CARBON STEEL	GALVANIZED	kg 0,24	KOB00SB321Z
		inch 0,67	0,37			lb 0,53	

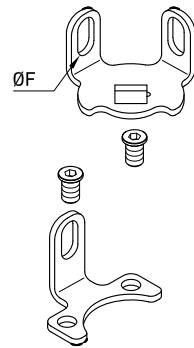

## LKS FOR SBF - SBF-W

TYPE	DN	ANSI	SW	ØF	MATERIAL	TREATMENT	WEIGHT
LK13 - S	LK13 - S	150-300-600	mm	9	6,5	CARBON STEEL	GALVANIZED
			inch	0,35	0,26		
LK13 - S	LK13 - S	150-300-600	mm	9	6,5	STAINLESS STEEL	-
			inch	0,35	0,26		
LK20 - S 150	LK20 - S 150	150	mm	14	6,5	CARBON STEEL	GALVANIZED
			inch	0,55	0,26		
LK20 - S 150	LK20 - S 150	150	mm	14	6,5	STAINLESS STEEL	-
			inch	0,55	0,26		
LK20 - S	LK20 - S	300-600	mm	14	6,5	CARBON STEEL	GALVANIZED
			inch	0,55	0,26		
LK20 - S	LK20 - S	300-600	mm	14	6,5	STAINLESS STEEL	-
			inch	0,55	0,26		
LK32 - S	LK32 - S	150-300-600	mm	17	6,5	CARBON STEEL	GALVANIZED
			inch	0,67	0,26		
LK32 - S	LK32 - S	150-300-600	mm	17	6,5	STAINLESS STEEL	-
			inch	0,67	0,26		
LK80 - S	LK80 - S	150-300-600	mm	19	10	CARBON STEEL	GALVANIZED
			inch	0,75	0,39		
LK80 - S	LK80 - S	150-300-600	mm	19	10	STAINLESS STEEL	-
			inch	0,75	0,39		
LK100 - S	LK100 - S	150-300-600	mm	24	12	CARBON STEEL	GALVANIZED
			inch	0,94	0,47		
LK100 - S	LK100 - S	150-300-600	mm	24	12	STAINLESS STEEL	-
			inch	0,94	0,47		

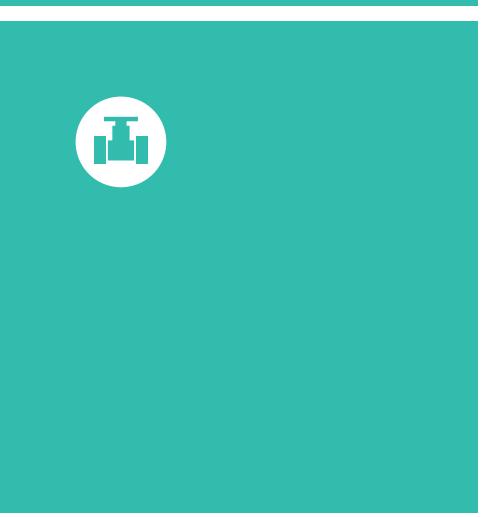


# HANDLES

Edition. 21.0


- BENT HANDLES
  - BUTTERFLY HANDLES
  - CUT STRAIGHT HANDLES
  - CUT BENT HANDLES
  - PIPE HANDLES
  - SHORT HANDLES
  - STRAIGHT HANDLES
- 



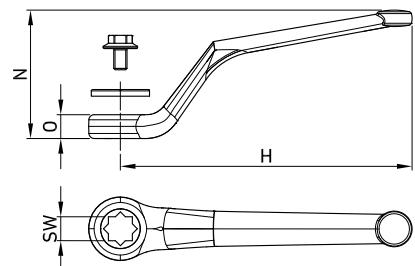


## BENT HANDLES

SW	H	N	O	MATERIAL	TREATMENT	WEIGHT	HANDLE CODE	KIT CODE
mm 9	110	53	9	ZAMAK	CHROMING	kg 0,082	C001010ZC	KOL0011ZZ
inch 0,35	4,33	2,09	0,35			lb 0,18		
mm 9	110	53	9	CARBON STEEL	GALVANIZED	kg 0,097	C001010Z2	KOL0011ZZ
inch 0,35	4,33	2,09	0,35			lb 0,21		
mm 9	110	53	9	STAINLESS STEEL	-	kg 0,098	C0010104H	KOL00116H
inch 0,35	4,33	2,09	0,35			lb 0,22		
mm 14	180	48	13	ZAMAK	CHROMING	kg 0,18	C008550ZC	KOL0016ZZ
inch 0,55	7,09	1,89	0,51			lb 0,40		
mm 14	180	48	14	CARBON STEEL	GALVANIZED	kg 0,248	C0069202Z	KOL00152Z
inch 0,55	7,09	1,89	0,55			lb 0,55		
mm 14	180	48	14	STAINLESS STEEL	-	kg 0,257	C0069204H	KOL00156H
inch 0,55	7,09	1,89	0,55			lb 0,57		
mm 17	200	60	13	CARBON STEEL	GALVANIZED	kg 0,36	C0505502Z	K06A0019902000Z
inch 0,67	7,87	2,36	0,51			lb 0,79		
mm 17	300	71	14	CARBON STEEL	GALVANIZED	kg 0,662	C0092502Z	KBL00132Z
inch 0,67	11,81	2,80	0,55			lb 1,46		
mm 17	300	71	14	STAINLESS STEEL	-	kg 0,675	C0092506H	KBL00136H
inch 0,67	11,81	2,80	0,55			lb 1,49		

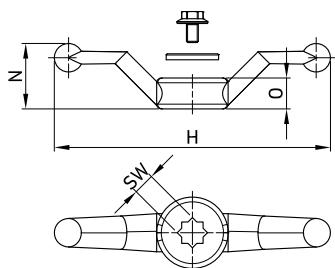


## BUTTERFLY HANDLES

SW	H	N	O	MATERIAL	TREATMENT	WEIGHT	HANDLE CODE	KIT CODE
mm 9	116	27,5	13	ZAMAK	GALVANIZED	kg 0,107	C010740Z2	KOL0018ZZ
inch 0,35	4,57	1,08	0,51			lb 0,24		
mm 14	116	27,5	13	ZAMAK	GALVANIZED	kg 0,097	C010750Z2	KOL0019ZZ
inch 0,55	4,57	1,08	0,51			lb 0,21		

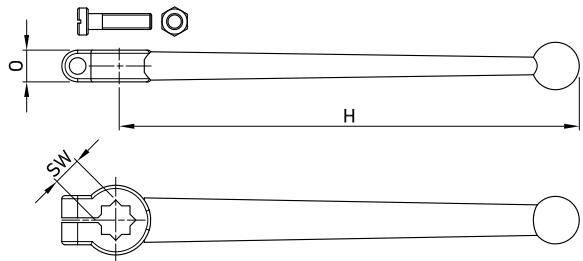


### CUT STRAIGHT HANDLES

SW	H	N	O	MATERIAL	TREATMENT	WEIGHT	HANDLE CODE	KIT CODE
mm	9	145	-	ZAMAK	CHROMING	kg 0,042	C000020ZC	KEL006ZZ
inch	0,35	5,71	-			lb 0,09		
mm	14	300	-	ALLUMINIUM	RED PAINTED	kg 0,208	C002890AV	KBL009HV
inch	0,55	11,81	-			lb 0,46		

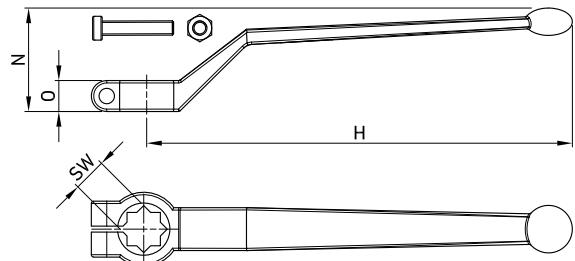


### CUT BENT HANDLES

SW	H	N	O	MATERIAL	TREATMENT	WEIGHT	HANDLE CODE	KIT CODE
mm	14	180	43	ZAMAK	CHROMING	kg 0,195	C001200ZC	KEL007ZZ
inch	0,55	7,09	1,69			lb 0,43		
mm	14	330	71	ALLUMINIUM	RED PAINTED	kg 0,222	C000360AV	KBL001HV
inch	0,55	12,99	2,80			lb 0,49		

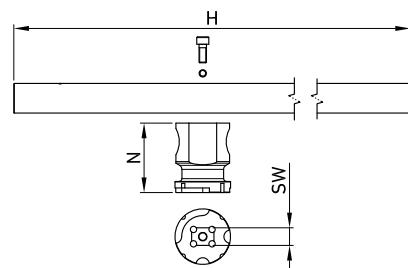


### PIPE HANDLES

SW	H	N	O	MATERIAL	TREATMENT	WEIGHT	HANDLE CODE	KIT CODE
mm	19	650	75	CARBON STEEL	GALVANIZED	kg 2,112	C0012502Z	KOL00202Z
inch	0,75	25,59	2,95			lb 4,66		
mm	19	650	75	STAINLESS STEEL	-	kg 2,312	C0012504H	KOL00206H
inch	0,75	25,59	2,95			lb 5,10		
mm	24	650	79	CARBON STEEL	GALVANIZED	kg 3,912	C0012502Z	KOL00212Z
inch	0,94	25,59	3,11			lb 8,62		

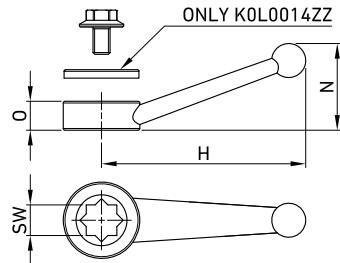

## SHORT HANDLES

SW	H	N	O	MATERIAL	TREATMENT	WEIGHT	HANDLE CODE	KIT CODE
mm 6	60	25,5	8,5	ZAMAK	RED PAINTED	kg 0,024	C001490ZV	K1LT117ZV
inch 0,24	2,36	1,00	0,33			lb 0,05		
mm 9	60	25,5	8,5	ZAMAK	GALVANIZED	kg 0,022	C009490ZC	K0L0014ZZ
inch 0,35	2,36	1,00	0,33			lb 0,05		

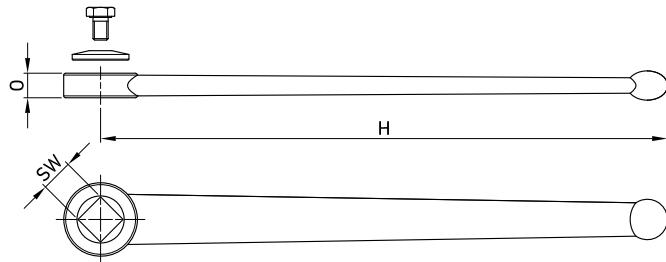

## STRAIGHT HANDLES

SW	H	N	O	MATERIAL	TREATMENT	WEIGHT	HANDLE CODE	KIT CODE
mm 14	200	-	14	ALLUMINIUM	RED PAINTED	kg 0,109	C002950AV	KEL008HV
inch 0,55	7,87	-	0,55			lb 0,24		
mm 17	300	-	13	CARBON STEEL	GALVANIZED	kg 0,457	C0081302Z	K0L00122Z
inch 0,67	11,81	-	0,51			lb 1,01		
mm 17	300	-	13	STAINLESS STEEL	-	kg 0,467	C0081306H	K0L00126H
inch 0,67	11,81	-	0,51			lb 1,03		



# ACTUATORS

Edition. 21.0

- INSTALLATION, OPERATION AND MAINTENANCE
- TECHNICAL DETAILS
- Quarter-Turn Rack & Pinion ACTUATORS
- Pneumatic/Electric actuators



## INTRODUCTION

### STANDARDS


Gemels actuators are designed and in compliance with the following standards:

**ISO5211:** Orientation of actuator to valve mounting flange (i.e.F05,F07....)

**VDI/VDE 3845:** Namur mounting for accessories such as switchboxes, solenoid valves and positioners.

**ATEX:** Directive 2014/34/UE.

**PED:** PRessure Equipment Directive 2014/68/EU.

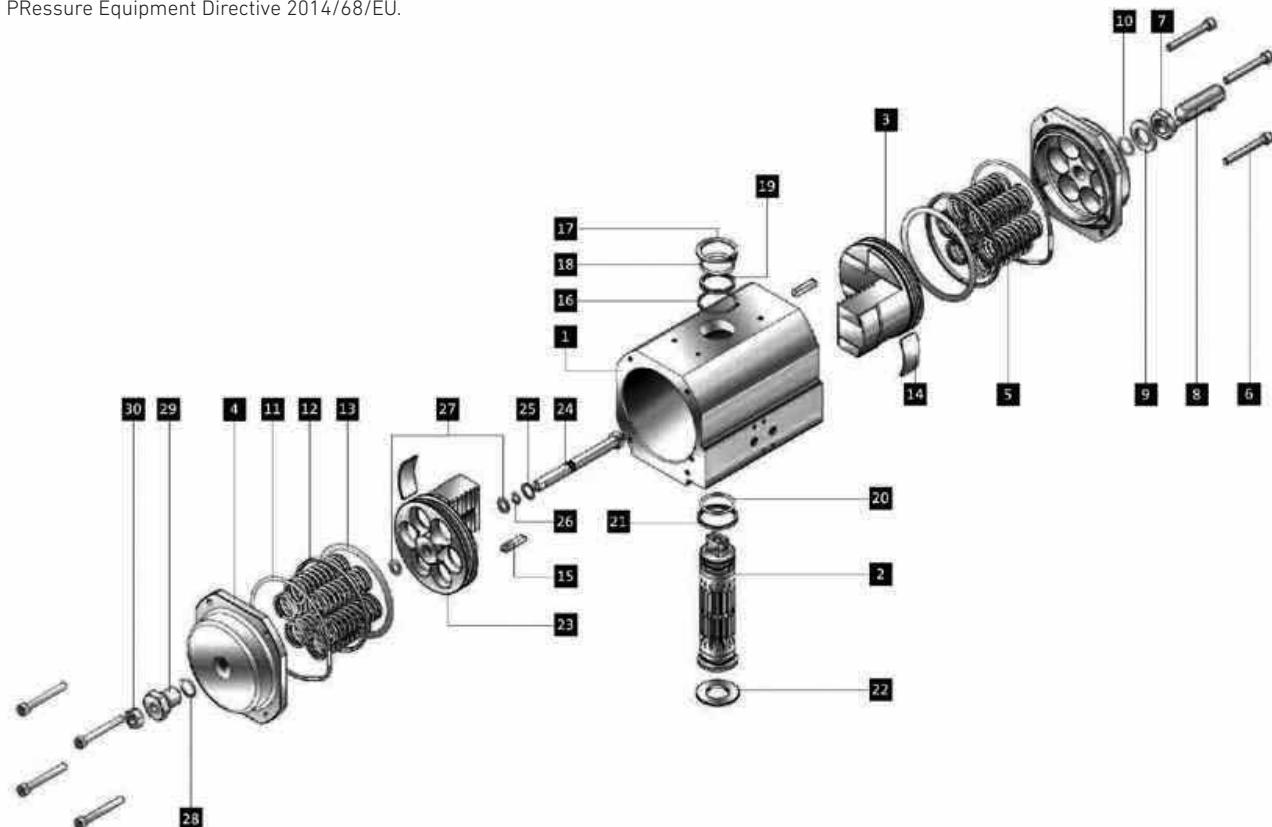

REF NO	DESCRIPTION	QTY	MATERIAL STD UNIT	COMMENTS
1	Body	1	Aluminium Anod.	-
2	Driveshaft	1	Steel	Alt. CNI 425
3	Piston	2	Aluminium	Alt. Hard Anodized/PTFE
4	Endcap with Stop Adj.	2	Aluminium Anod.	-
5	Spring	12 max	SiCr	S1 Double Acting only
6	Endcap Bolt	8	Stainless Steel	-
7	Open Stop Adj. Bolt	1	Stainless Steel	-
8	Open Stop Adj. Nut	1	Stainless Steel	-
9	Open Stop Adj. Washer	1	Polyethylene	-
10	Open Stop Adj.'O'Ring	1	Buna Nitrile	Alt. Viton/Silicone/EPDM
11*	Endcap 'O'Ring	2	Buna Nitrile	Alt. Viton/Silicone/EPDM
12*	Piston Back-up Bearing	2	POM Delrin	-
13*	Piston 'O'Ring	2	Buna Nitrile	Alt. Viton/Silicone/EPDM
14*	Piston Wearpad	2	POM Delrin	-
15*	Piston Guidebar	2	Steel	-

REF NO	DESCRIPTION	QTY	MATERIAL STD UNIT	COMMENTS
16*	Driveshaft Washer	1	Polyethylene	-
17*	Driveshaft Circlip	1	Steel	-
18*	Driveshaft Upper 'O'Ring	1	Buna Nitrile	Alt. Viton/Silicone/EPDM
19*	Driveshaft Upper Bearing	1	POM Delrin	-
20*	Driveshaft Lower 'O'Ring	1	Buna Nitrile	Alt. Viton/Silicone/EPDM
21*	Driveshaft Lower Bearing	1	POM Delrin	-
22	Centralization Ring	1	POM Delrin	-
23 (G10)	Piston (Closed Stop Adj.)	1	Aluminium	Alt. Hard Anodized/PTFE
24 (G10)	Closed Stop Adj.Bolt	1	Stainless Steel	-
25 (G10)	Closed Stop Adj.Damper	1	POM Delrin	-
26 (G10)	Stop Bolt 'O' Ring	1	Buna Nitrile	Alt. Viton/Silicone/EPDM
27 (G10)	Piston Stop Bolt 'O'Ring	2	Buna Nitrile	Alt. Viton/Silicone/EPDM
28 (G10)	Stop Bolt Retainer 'O'Ring	1	Buna Nitrile	Alt. Viton/Silicone/EPDM
29 (G10)	Stop Bolt Retainer	1	Stainless Steel	-
30 (G10)	Closed Stop Adj.Nut	1	Stainless Steel	-

## ACTUATOR OPERATION

### Maximum Operating Time Per Second (0.55 MPaG / 80 PSIG)

Actuator Size	FATDA0500401SH FATSR0500401SH	FATDA1000401SH FATSR1000401SH	FATDA2000401SH FATSR2000401SH	FATDA3750401SH FATSR3750401SH	FATDA6000401SH FATSR6000401SH	FATDA8250401SH FATSR8250401SH
DA open	<1	<1	2	2,5	3,5	4
DA close	<1	<1	2	2,5	3,5	4
SR open	<1	<1	2	2,5	3,5	4
SR close	<1	<1	1,5	2	3	3

### Air Consumption per Stroke

Actuator Size	FATDA0500401SH FATSR0500401SH	FATDA1000401SH FATSR1000401SH	FATDA2000401SH FATSR2000401SH	FATDA3750401SH FATSR3750401SH	FATDA6000401SH FATSR6000401SH	FATDA8250401SH FATSR8250401SH
Port 'A' to open (liters)	0,18	0,38	0,9	1,69	2,8	3,05
Port 'B' to close (liters)	0,24	0,5	1	1,9	3,4	3,7
Port 'A' to open (cubic inch)	10,98	23,18	54,92	103,13	170,86	186,12
Port 'B' to close (cubic inch)	14,65	30,52	61,02	115,95	207,47	225,79

### Overall Actuator Weight

Actuator Size	3	10	35	70
DA Kilograms (kg)	1.0	2.8	10.4	20.2
SR Kilograms (kg)	1.1	2.9	11.9	23.9
DA pounds (lbs)	2.2	6.2	22.8	44.4
SR pounds (lbs)	2.4	6.4	26.1	52.5

### Minimum Recommended Solenoid Valve Cv

Actuator Size	3	10	35	70
Solenoid Cv	0.2	0.2	0.5	0.8

## TECHNICAL DATA

**GDA** = DoubleActing

**DA Port 'A'** = Air To Open (Anti-Clockwise)

**DA Port 'B'** = Air To Close (Clockwise)

**Fail Safe Open** = Rotate Pistons 180° About Own Axis

**Drive Medium** = Air (Dry or Lubricated); Non Corrosive Gas; Light Hydraulic Oil

**GSR** = SpringReturn

**SR Port 'A'** = Air To Oper (Anti-Clockwise compressing Springs)

**SR Port 'B'** = Spring To Close (Clockwise)

### Temperature:

- Buna Nitrile 'O' Seals

-40 to +100°C

or -40 to +212°F

- Viton 'O' Seals

-25 to +250°C

or -13 to +482°F

## DOUBLE ACTING



### OPENING STROKE

- Looking at the front of the Actuator, PORT 'A' is on the left and PORT 'B' is on the right.
- To open the Actuator, connect the air supply to PORT 'A' to fill the central chamber of the Actuator.
- The two opposing Pistons will open and rotate the driveshaft in a counter-clockwise direction.
- When the pistons reach the end of their travel, the actuator driveshaft will be in the open position.



### CLOSING STROKE

- Looking at the front of the Actuator, PORT 'A' is on the left and PORT 'B' is on the right.
- To close the Actuator, connect the air supply to PORT 'B' to fill the outer chambers of the Actuator
- The two opposing Pistons will close and rotate the actuator driveshaft in a clockwise direction.
- When the pistons reach the end of their travel, the actuator driveshaft will be in the closed position.

## TORQUE VALUE GEMELS ACTUATORS

### TORQUE DIAGRAM DOUBLE ACTING ACTUATOR

With reference to the above diagram, is possible to note that the torque of a double acting actuator remain constant throughout the complete action.



## **TORQUES (Nm) ACTUATOR GEMELS DOUBLE ACTING**

MODEL	AIR SUPPLY						
	Mpa PSI	0,3 43,5	0,4 58	0,5 72,5	0,55 79,75	0,6 87	0,7 101,5
DA 25	Nm	11,9	15,8	19,8	21,7	23,7	27,7
	lbf-ft	8,78	11,65	14,60	16,01	17,48	20,43
DA40	Nm	20,8	27,7	34,6	38,1	41,6	48,5
	lbf-ft	15,34	20,43	25,52	28,10	30,68	35,77
DA 50	Nm	25,4	33,8	42,3	46,5	50,7	59,2
	lbf-ft	18,73	24,93	31,20	34,30	37,39	43,66
DA 100	Nm	50,7	67,6	84,5	93	101,4	118,3
	lbf-ft	37,39	49,86	62,32	68,59	74,79	87,25
DA 200	Nm	101	134,6	168,3	185,1	201,9	235,6
	lbf-ft	74,49	99,28	124,13	136,52	148,91	173,77
DA 375	Nm	187	249	312	343	374	437
	lbf-ft	137,92	183,65	230,12	252,98	275,85	322,31
DA 580	Nm	298	398	497	547	597	696
	lbf-ft	219,79	293,55	366,57	403,45	440,32	513,34
DA 825	Nm	412	550	687	756	825	962
	lbf-ft	303,87	405,66	506,70	557,60	608,49	709,53

## SPRING RETURN



### OPENING STROKE

- Looking at the front of the Actuator, PORT 'A' is on the left and PORT 'B' is on the right.
- To open the Actuator, connect the air supply to PORT 'A' to fill the central chamber of the Actuator.
- The two opposing Pistons will open, compressing the springs in the outer chambers and rotate the driveshaft in a counter-clockwise direction.
- When the pistons reach the end of their travel, the springs will be fully compressed and the actuator driveshaft will be in the open position.





### CLOSING STROKE

- Looking at the front of the Actuator, PORT 'A' is on the left and PORT 'B' is on the right.
- To close the Actuator, disconnect the air supply from PORT 'A'. This will allow the compressed springs to push the pistons back to their starting position.
- As the springs decompress the two opposing Pistons will close and rotate the actuator driveshaft in a clockwise direction.
- When the pistons reach the end of their travel, the actuator driveshaft will be in the closed position.

## TORQUE VALUE GEMELS ACTUATORS

### TORQUE DIAGRAM DOUBLE ACTING ACTUATOR

With reference to the above diagram the torque of a Spring Return actuator is not constant but decreasing. This is due to the action of the springs.

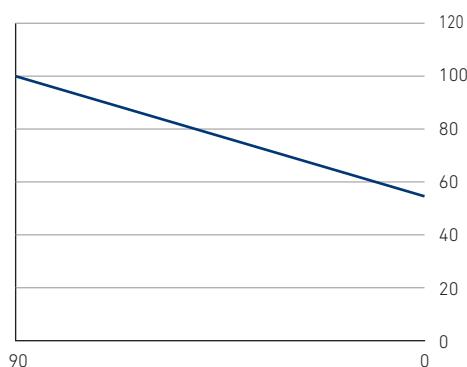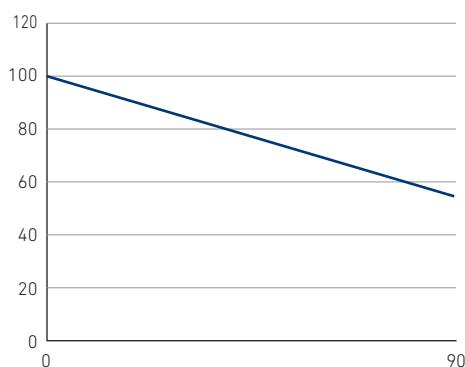

## TORQUES (Nm) ACTUATOR GEMELS SPRING RETURN

**Note:** For a continuous improvement, Gemels reserves the right to operate changes without prior notice. For the values highlighted, or are missing, or with a minus sign (-), it is reported that with the number of standard springs, at 3 bar, the actuator is not able to overcome the force of the internal springs, therefore the actuator can not to perform one complete rotation. Therefore with air supply of 3 Bar, it will be necessary evaluate the reduction of the number of springs or buy a bigger model.

TYPE	Springs Q.ty	Spring Torque	AIR SUPPLY													
			Mpa	0,3		0,4		0,5		0,55		0,6		0,7		
			PSI	43,5	58	72,5	79,75	87	101,5	Start	End	Start	End	Start	End	
		Start	End	Start	End	Start	End	Start	End	Start	End	Start	End	Start	End	
SR35/(18)	1	2,72	1,50	Nm	23,90	22,60	32,30	31,10	40,80	39,50	45,00	43,80	49,20	48,00	57,70	56,40
		2,01	1,11	Ibf-ft	17,63	16,67	23,82	22,94	30,09	29,13	33,19	32,31	36,29	35,40	42,56	41,60
SR60/(40)	2	5,44	3,00	Nm	22,40	19,90	30,80	28,40	39,30	36,80	43,50	41,00	47,70	45,30	56,20	53,70
		4,01	2,21	Ibf-ft	16,52	14,68	22,72	20,95	28,99	27,14	32,08	30,24	35,18	33,41	41,45	39,61
SR35/(18)	3	8,16	4,50	Nm	20,90	17,20	29,30	25,60	37,80	34,10	42,00	38,30	46,20	42,50	54,70	51,00
		6,02	3,32	Ibf-ft	15,42	12,69	21,61	18,88	27,88	25,15	30,98	28,25	34,08	31,35	40,34	37,62
SR60/(40)	4	10,88	6,00	Nm	19,40	14,50	27,80	22,90	36,30	31,40	40,50	35,60	44,70	39,80	53,20	48,30
		8,02	4,43	Ibf-ft	14,31	10,69	20,50	16,89	26,77	23,16	29,87	26,26	32,97	29,35	39,24	35,62
SR35/(18)	5	13,60	7,50	Nm	17,90	11,80	26,30	20,20	34,80	28,70	39,00	32,90	43,20	37,10	51,70	45,60
		10,03	5,53	Ibf-ft	13,20	8,70	19,40	14,90	25,67	21,17	28,76	24,27	31,86	27,36	38,13	33,63
SR60/(40)	6	16,32	9,00	Nm	16,40	9,00	24,80	17,50	33,30	25,90	37,50	30,20	41,70	34,40	50,20	42,80
		12,04	6,64	Ibf-ft	12,10	6,64	18,29	12,91	24,56	19,10	27,66	22,27	30,76	25,37	37,03	31,57
SR35/(18)	7	19,04	10,50	Nm	-	-	23,30	14,80	31,80	23,20	36,00	27,40	40,20	31,70	48,70	40,10
		14,04	7,74	Ibf-ft	-	-	17,19	10,92	23,45	17,11	26,55	20,21	29,65	23,38	35,92	29,58
SR60/(40)	8	21,76	12,00	Nm	-	-	21,80	12,00	30,30	20,50	34,50	24,70	38,70	28,90	47,20	37,40
		16,05	8,85	Ibf-ft	-	-	16,08	8,85	22,35	15,12	25,45	18,22	28,54	21,32	34,81	27,58
SR35/(18)	9	24,48	13,50	Nm	-	-	-	-	28,80	17,80	33,00	22,00	37,20	26,20	45,70	34,70
		18,06	9,96	Ibf-ft	-	-	-	-	21,24	13,13	24,34	16,23	27,44	19,32	33,71	25,59
SR60/(40)	10	27,20	15,00	Nm	-	-	-	-	27,30	15,10	31,50	19,30	35,70	23,50	44,20	32,00
		20,06	11,06	Ibf-ft	-	-	-	-	20,14	11,14	23,23	14,23	26,33	17,33	32,60	23,60
SR35/(18)	11	29,92	16,50	Nm	-	-	-	-	-	-	30,00	16,60	34,20	20,80	42,70	29,20
		22,07	12,17	Ibf-ft	-	-	-	-	-	-	22,13	12,24	25,22	15,34	31,49	21,54
SR60/(40)	12	32,64	18,00	Nm	-	-	-	-	-	-	28,50	13,80	32,70	18,10	41,20	26,50
		24,07	13,28	Ibf-ft	-	-	-	-	-	-	21,02	10,18	24,12	13,35	30,39	19,55
SR35/(18)	1	5,12	3,34	Nm	47,40	45,60	64,30	62,50	81,20	79,40	89,60	87,80	98,10	96,30	115,00	113,20
		3,78	2,46	Ibf-ft	34,96	33,63	47,43	46,10	59,89	58,56	66,09	64,76	72,35	71,03	84,82	83,49
SR60/(40)	2	10,24	6,68	Nm	44,00	40,50	60,90	57,40	77,80	74,30	86,30	82,70	94,70	91,20	111,60	108,10
		7,55	4,93	Ibf-ft	32,45	29,87	44,92	42,34	57,38	54,80	63,65	61,00	69,85	67,27	82,31	79,73
SR35/(18)	3	15,36	10,02	Nm	40,70	35,30	57,60	52,20	74,50	69,10	82,90	77,60	91,40	86,00	108,30	102,90
		11,33	7,39	Ibf-ft	30,02	26,04	42,48	38,50	54,95	50,97	61,14	57,23	67,41	63,43	79,88	75,89
SR60/(40)	4	20,48	13,36	Nm	37,30	30,20	54,20	47,10	71,10	64,00	79,60	72,50	88,00	80,90	104,90	97,80
		15,11	9,85	Ibf-ft	27,51	22,27	39,98	34,74	52,44	47,20	58,71	53,47	64,91	59,67	77,37	72,13
SR35/(18)	5	25,60	16,70	Nm	34,00	25,10	50,90	42,00	67,80	58,90	76,30	67,40	84,70	75,80	101,60	92,70
		18,88	12,32	Ibf-ft	25,08	18,51	37,54	30,98	50,01	43,44	56,28	49,71	62,47	55,91	74,94	68,37
SR60/(40)	6	30,72	20,04	Nm	30,70	20,00	47,60	36,90	64,50	53,80	72,90	62,20	81,40	70,70	98,30	87,60
		22,66	14,78	Ibf-ft	22,64	14,75	35,11	27,22	47,57	39,68	53,77	45,88	60,04	52,15	72,50	64,61
SR35/(18)	7	35,84	23,38	Nm	-	-	44,20	31,80	61,10	48,70	69,60	57,10	78,00	65,60	94,90	82,50
		26,43	17,24	Ibf-ft	-	-	32,60	23,45	45,06	35,92	51,33	42,11	57,53	48,38	69,99	60,85
SR60/(40)	8	40,96	26,72	Nm	-	-	40,90	26,60	57,80	43,50	66,20	52,00	74,70	60,40	91,60	77,30
		30,21	19,71	Ibf-ft	-	-	30,17	19,62	42,63	32,08	48,83	38,35	55,10	44,55	67,56	57,01
SR35/(18)	9	46,08	30,06	Nm	-	-	-	-	54,40	38,40	62,90	46,90	71,30	55,30	88,20	72,20
		33,99	22,17	Ibf-ft	-	-	-	-	40,12	28,32	46,39	34,59	52,59	40,79	65,05	53,25
SR60/(40)	10	51,20	33,40	Nm	-	-	-	-	51,10	33,30	59,60	41,80	68,00	50,20	84,90	67,10
		37,76	24,63	Ibf-ft	-	-	-	-	37,69	24,56	43,96	30,83	50,15	37,03	62,62	49,49
SR35/(18)	11	56,32	36,74	Nm	-	-	-	-	-	-	56,20	36,60	64,70	45,10	81,60	62,00
		41,54	27,10	Ibf-ft	-	-	-	-	-	-	41,45	26,99	47,72	33,26	60,18	45,73
SR60/(40)	12	61,44	40,08	Nm	-	-	-	-	-	-	52,90	31,50	61,30	40,00	78,20	56,90
		45,32	29,56	Ibf-ft	-	-	-	-	-	-	39,02	23,23	45,21	29,50	57,68	41,97

## TORQUES (Nm) ACTUATOR GEMELS SPRING RETURN

TYPE	Springs	Spring Torque	AIR SUPPLY														
			Mpa	0,3		0,4		0,5		0,55		0,6		0,7			
			PSI	43,5	58	72,5	79,75	87	101,5	Start	End	Start	End	Start	End		
	Outer	Inner	Start	End		Start	End										
SR130(72)	1	0	21,70	11,90	Nm	89,00	79,30	122,70	112,90	156,30	146,60	173,20	163,40	190,00	180,20	223,70	213,90
			16,01	8,78	lbf-ft	65,64	58,49	90,50	83,27	115,28	108,13	127,75	120,52	140,14	132,91	164,99	157,76
	1	1	32,60	17,90	Nm	83,10	68,40	116,70	102,10	150,40	135,70	167,20	152,60	184,00	169,40	217,70	203,00
			24,04	13,20	lbf-ft	61,29	50,45	86,07	75,30	110,93	100,09	123,32	112,55	135,71	124,94	160,57	149,72
	2	0	43,40	23,90	Nm	77,10	57,60	110,80	91,20	144,40	124,90	161,20	141,70	178,10	158,50	211,70	192,20
			32,01	17,63	lbf-ft	56,87	42,48	81,72	67,27	106,50	92,12	118,89	104,51	131,36	116,90	156,14	141,76
	2	1	54,30	29,80	Nm	71,10	46,70	104,80	80,40	138,40	114,00	155,30	130,90	172,10	147,70	205,80	181,30
			40,05	21,98	lbf-ft	52,44	34,44	77,30	59,30	102,08	84,08	114,54	96,55	126,93	108,94	151,79	133,72
	2	2	65,10	35,80	Nm	65,20	35,90	98,80	69,50	132,50	103,20	149,30	120,00	166,10	136,80	199,80	170,50
			48,02	26,40	lbf-ft	48,09	26,48	72,87	51,26	97,73	76,12	110,12	88,51	122,51	100,90	147,36	125,75
	3	0	65,10	35,80	Nm	65,20	35,90	98,80	69,50	132,50	103,20	149,30	120,00	166,10	136,80	199,80	170,50
			48,02	26,40	lbf-ft	48,09	26,48	72,87	51,26	97,73	76,12	110,12	88,51	122,51	100,90	147,36	125,75
	3	1	76,00	41,80	Nm	59,20	25,00	92,90	58,70	126,50	92,30	143,30	109,20	160,20	126,00	193,80	159,60
SR240(132)			56,05	30,83	lbf-ft	43,66	18,44	68,52	43,29	93,30	68,08	105,69	80,54	118,16	92,93	142,94	117,71
	3	2	86,80	47,70	Nm	53,20	14,20	86,90	47,80	120,50	81,50	137,40	98,30	154,20	115,10	187,90	148,80
			64,02	35,18	lbf-ft	39,24	10,47	64,09	35,26	88,88	60,11	101,34	72,50	113,73	84,89	138,59	109,75
	3	3	97,70	53,70	Nm	47,30	3,30	80,90	37,00	114,60	70,60	131,40	87,50	148,20	104,30	181,90	137,90
			72,06	39,61	lbf-ft	34,89	2,43	59,67	27,29	84,52	52,07	96,92	64,54	109,31	76,93	134,16	101,71
	4	0	86,80	47,70	Nm	53,20	14,20	86,90	47,80	120,60	81,50	137,40	98,30	154,20	115,10	187,90	148,80
			64,02	35,18	lbf-ft	39,24	10,47	64,09	35,26	88,88	60,11	101,34	72,50	113,73	84,89	138,59	109,75
	4	1	97,70	53,70	Nm	47,30	3,30	80,90	37,00	114,60	70,60	131,40	87,50	148,20	104,30	181,90	137,90
			72,06	39,61	lbf-ft	34,89	2,43	59,67	27,29	84,52	52,07	96,92	64,54	109,31	76,93	134,16	101,71
	4	2	108,50	59,70	Nm	41,30	-7,50	75,00	26,10	108,60	59,80	125,40	76,60	142,30	93,40	175,90	127,10
			80,03	44,03	lbf-ft	30,46	-5,53	55,32	19,25	80,10	44,11	92,49	56,50	104,95	68,89	129,74	93,74
	4	3	119,40	65,60	Nm	35,30	-18,40	69,00	15,30	102,60	48,90	119,50	65,80	136,30	82,60	170,00	116,20
			88,06	48,38	lbf-ft	26,04	-13,57	50,89	11,28	75,67	36,07	88,14	48,53	100,53	60,92	125,39	85,70
	4	4	130,20	71,60	Nm	29,40	-29,20	63,00	4,40	96,70	38,10	113,50	54,90	130,30	71,70	164,00	105,40
			96,03	52,81	lbf-ft	21,68	-21,54	46,47	3,25	71,32	28,10	83,71	40,49	96,10	52,88	120,96	77,74
SR240(132)	1	0	40,20	22,10	Nm	165,00	146,90	227,30	209,30	289,70	271,60	320,90	302,80	352,10	334,00	414,40	396,30
			29,65	16,30	lbf-ft	121,70	108,35	167,65	154,37	213,67	200,32	236,68	223,33	259,69	246,35	305,64	292,30
	1	1	60,30	33,20	Nm	153,90	126,80	216,30	189,20	278,70	251,50	309,80	282,70	341,00	313,90	403,40	376,20
			44,47	24,49	lbf-ft	113,51	93,52	159,53	139,55	205,56	185,50	228,50	208,51	251,51	231,52	297,53	277,47
	2	0	80,40	44,20	Nm	142,90	106,70	205,20	169,10	267,60	231,40	298,80	262,60	330,00	293,80	392,30	356,10
			59,30	32,60	lbf-ft	105,40	78,70	151,35	124,72	197,37	170,67	220,38	193,68	243,39	216,70	289,34	262,65
	2	1	100,50	55,30	Nm	131,80	86,60	194,20	149,00	256,50	211,30	287,70	242,50	318,90	273,70	381,30	336,00
			74,12	40,79	lbf-ft	97,21	63,87	143,23	109,90	189,18	155,85	212,20	178,86	235,21	201,87	281,23	247,82
	2	2	120,60	66,30	Nm	120,80	66,50	183,10	128,90	245,50	191,20	276,70	222,40	307,90	253,60	370,20	315,90
			88,95	48,90	lbf-ft	89,10	49,05	135,05	95,07	181,07	141,02	204,08	164,03	227,09	187,05	273,04	233,00
	3	0	120,60	66,30	Nm	120,80	66,50	183,10	128,90	245,50	191,20	276,70	222,40	307,90	253,60	370,20	315,90
			88,95	48,90	lbf-ft	89,10	49,05	135,05	95,07	181,07	141,02	204,08	164,03	227,09	187,05	273,04	233,00
	3	1	140,70	77,40	Nm	109,70	46,40	172,10	108,80	234,40	171,10	265,60	202,30	296,80	233,50	359,20	295,80
			103,77	57,09	lbf-ft	80,91	34,22	126,93	80,25	172,88	126,20	195,90	149,21	218,91	172,22	264,93	218,17
	3	2	160,80	88,40	Nm	98,70	26,30	161,00	88,70	223,40	151,00	254,60	182,20	285,80	213,40	348,10	275,70
			118,60	65,20	lbf-ft	72,80	19,40	118,75	65,42	164,77	111,37	187,78	134,38	210,79	157,40	256,74	203,35
	3	3	180,90	99,50	Nm	87,60	6,20	150,00	68,60	212,30	130,90	243,50	162,10	274,70	193,30	337,10	255,60
			133,42	73,39	lbf-ft	64,61	4,57	110,63	50,60	156,58	96,55	179,60	119,56	202,61	142,57	248,63	188,52
	4	0	160,80	88,40	Nm	98,70	26,30	161,00	88,70	223,40	151,00	254,60	182,20	285,80	213,40	348,10	275,70
			118,60	65,20	lbf-ft	72,80	19,40	118,75	65,42	164,77	111,37	187,78	134,38	210,79	157,40	256,74	203,35
	4	1	180,90	99,50	Nm	87,60	6,20	150,00	68,60	212,30	130,90	243,50	162,10	274,70	193,30	337,10	255,60
			133,42	73,39	lbf-ft	64,61	4,57	110,63	50,60	156,58	96,55	179,60	119,56	202,61	142,57	248,63	188,52
	4	2	201,00110,50	Nm	76,60	-13,90	138,90	48,50	201,30	110,80	232,50	142,00	263,60	173,20	326,00	235,50	
			148,25	81,50	lbf-ft	56,50	-10,25	102,45	35,77	148,47	81,72	171,48	104,73	194,42	127,75	240,44	173,70
	4	3	221,10121,60	Nm	65,50	-34,00	127,90	28,40	190,20	90,70	221,40	121,90	252,60	153,10	315,00	215,40	
			163,07	89,69	lbf-ft	48,31	-25,08	94,33	20,95	140,28	66,90	163,30	89,91	186,31	112,92	232,33	158,87
	4	4	241,20132,60	Nm	54,50	-54,10	116,80	8,30	179,20	70,60	210,40	101,80	241,50	133,00	303,90	195,30	
			177,90	97,80	lbf-ft	40,20	-39,90	86,15	6,12	132,17	52,07	155,18	75,08	178,12	98,10	224,14	144,05

**Note:** For a continuous improvement, Gemels reserves the right to operate changes without prior notice.

For the values highlighted, or are missing, or with a minus sign (-), it is reported that with the number of standard springs, at 3 bar, the actuator is not able to overcome the force of the internal springs, therefore the actuator can not perform one complete rotation. Therefore with air supply of 3 Bar, it will be necessary evaluate the reduction of the number of springs or buy a bigger model.

### Other Information

Actuator Lubricant: BERULUB FR16

## TORQUES (Nm) ACTUATOR GEMELS SPRING RETURN

**Note:** For a continuous improvement, Gemels reserves the right to operate changes without prior notice. For the values highlighted, or are missing, or with a minus sign (-), it is reported that with the number of standard springs, at 3 bar, the actuator is not able to overcome the force of the internal springs, therefore the actuator can not to perform one complete rotation. Therefore with air supply of 3 Bar, it will be necessary evaluate the reduction of the number of springs or buy a bigger model.





TYPE	Springs Outer Inner	Spring Torque	AIR SUPPLY														
			Mpa		0,3		0,4		0,5		0,55		0,6				
			PSI		43,5		58		72,5		79,75		87				
			Start	End	Start	End	Start	End	Start	End	Start	End	Start	End			
SR365/(210)	1	0	64,1	35,3	Nm	263,1	234,3	362,6	333,7	462	433,2	511,8	482,9	561,5	532,6	660,9	632,1
			47,28	26,04	lbf·ft	194,05	172,81	267,44	246,12	340,75	319,51	377,48	356,17	414,14	392,82	487,45	466,21
	1	1	96,2	52,9	Nm	245,5	202,2	344,9	301,7	444,4	401,1	494,1	450,9	543,8	500,6	643,3	600
			70,95	39,02	lbf·ft	181,07	149,13	254,38	222,52	327,77	295,84	364,43	332,57	401,09	369,22	474,47	442,54
	2	0	128,2	70,5	Nm	227,9	170,2	327,3	269,6	426,8	369,1	476,5	418,8	526,2	468,5	625,7	568
			94,56	52,00	lbf·ft	168,09	125,53	241,40	198,85	314,79	272,23	351,45	308,89	388,10	345,55	461,49	418,93
	2	1	160,3	88,1	Nm	210,2	138,1	309,7	237,6	409,1	337	458,9	386,8	508,6	436,5	608,1	535,9
			118,23	64,98	lbf·ft	155,04	101,86	228,42	175,24	301,74	248,56	338,47	285,29	375,12	321,94	448,51	395,26
	2	2	192,3	105,8	Nm	192,6	106,1	292,1	205,5	391,5	305	441,2	354,7	491	404,4	590,4	503,9
			141,83	78,03	lbf·ft	142,05	78,26	215,44	151,57	288,75	224,96	325,41	261,61	362,14	298,27	435,46	371,66
SR360/(290)	3	0	192,3	105,8	Nm	192,6	106,1	292,1	205,5	391,5	305	441,3	354,7	491	404,4	590,4	503,9
			141,83	78,03	lbf·ft	142,05	78,26	215,44	151,57	288,75	224,96	325,49	261,61	362,14	298,27	435,46	371,66
	3	1	224,4	123,4	Nm	175	74	274,4	173,5	373,9	272,9	423,6	322,7	473,3	372,4	572,8	471,8
			165,51	91,01	lbf·ft	129,07	54,58	202,39	127,97	275,77	201,28	312,43	238,01	349,09	274,67	422,47	347,98
	3	2	256,4	141	Nm	157,4	42	256,8	141,4	356,3	240,9	406	290,6	455,7	340,3	555,2	439,8
			189,11104,00		lbf·ft	116,09	30,98	189,41	104,29	262,79	177,68	299,45	214,33	336,11	250,99	409,49	324,38
	3	3	288,5	158,6	Nm	139,7	9,9	239,2	109,4	338,6	208,8	388,4	258,6	438,1	308,3	537,5	407,7
			212,79116,98		lbf·ft	103,04	7,30	176,42	80,69	249,74	154,00	286,47	190,73	323,13	227,39	396,44	300,70
	4	0	256,4	141	Nm	157,4	42	256,8	141,4	356,3	240,9	406	290,6	455,7	340,3	555,2	439,8
			189,11104,00		lbf·ft	116,09	30,98	189,41	104,29	262,79	177,68	299,45	214,33	336,11	250,99	409,49	324,38
SR360/(290)	4	1	288,5	158,6	Nm	139,7	9,9	239,2	109,4	338,6	208,8	388,4	258,6	438,1	308,3	537,6	407,7
			212,79116,98		lbf·ft	103,04	7,30	176,42	80,69	249,74	154,00	286,47	190,73	323,13	227,39	396,51	300,70
	4	2	320,5	176,3	Nm	122,1	-22,1	221,6	77,3	321	176,8	370,7	226,5	420,5	276,2	519,9	375,7
			236,39130,03		lbf·ft	90,06	-16,30	163,44	57,01	236,76	130,40	273,41	167,06	310,14	203,71	383,46	277,10
	4	3	352,6	193,9	Nm	104,5	-54,2	203,9	45,3	303,4	144,7	353,1	194,5	402,8	244,2	502,3	343,6
			260,06143,01		lbf·ft	77,08	-39,98	150,39	33,41	223,78	106,72	260,43	143,46	297,09	180,11	370,48	253,43
	4	4	384,6	211,5	Nm	86,8	-86,2	186,3	13,2	285,8	112,7	335,5	162,4	385,2	212,1	484,7	311,6
			283,67155,99		lbf·ft	64,02	-63,58	137,41	9,74	210,79	83,12	247,45	119,78	284,11	156,44	357,50	229,82
	1	0	89	49	Nm	364	324	501	461	639	599	707	668	776	736	914	874
			65,64	36,14	lbf·ft	268,47	238,97	369,52	340,02	471,30	441,80	521,45	492,69	572,35	542,84	674,13	644,63
SR360/(290)	1	1	133	73	Nm	339	280	477	417	614	555	683	623	752	692	889	829
			98,10	53,84	lbf·ft	250,03	206,52	351,82	307,56	452,86	409,35	503,75	459,50	554,65	510,39	655,69	611,44
	2	0	177	97	Nm	315	235	452	373	590	510	659	579	727	648	865	785
			130,55	71,54	lbf·ft	232,33	173,33	333,38	275,11	435,16	376,16	486,05	427,05	536,21	477,94	637,99	578,98
	2	1	221	122	Nm	291	191	428	329	566	466	634	535	703	603	841	741
			163,00	89,98	lbf·ft	214,63	140,87	315,68	242,66	417,46	343,70	467,61	394,59	518,50	444,75	620,29	546,53
	2	2	266	146	Nm	266	147	404	284	541	422	610	491	679	559	816	697
			196,19107,68		lbf·ft	196,19	108,42	297,97	209,47	399,02	311,25	449,91	362,14	500,80	412,30	601,85	514,08
	3	0	266	146	Nm	266	147	404	284	541	422	610	491	679	559	816	697
			196,19107,68		lbf·ft	196,19	108,42	297,97	209,47	399,02	311,25	449,91	362,14	500,80	412,30	601,85	514,08
SR360/(290)	3	1	310	170	Nm	242	103	379	240	517	378	586	446	654	515	792	652
			228,64125,39		lbf·ft	178,49	75,97	279,54	177,01	381,32	278,80	432,21	328,95	482,36	379,84	584,15	480,89
	3	2	354	195	Nm	218	58	355	196	493	333	561	402	630	471	767	608
			261,10143,82		lbf·ft	160,79	42,78	261,83	144,56	363,62	245,61	413,77	296,50	464,66	347,39	565,71	448,44
	3	3	398	219	Nm	193	14	331	152	468	289	537	358	606	426	743	564
			293,55161,53		lbf·ft	142,35	10,33	244,13	112,11	345,18	213,15	396,07	264,05	446,96	314,20	548,01	415,98
	4	0	354	195	Nm	218	58	355	196	493	333	561	402	630	471	768	608
			261,10143,82		lbf·ft	160,79	42,78	261,83	144,56	363,62	245,61	413,77	296,50	464,66	347,39	566,45	448,44
	4	1	398	219	Nm	193	14	331	152	468	289	537	358	606	426	743	564
			293,55161,53		lbf·ft	142,35	10,33	244,13	112,11	345,18	213,15	396,07	264,05	446,96	314,20	548,01	415,98
SR360/(290)	4	2	443	243	Nm	169	-30	306	107	444	245	513	314	581	382	719	520
			326,74179,23		lbf·ft	124,65	-22,13	225,69	78,92	327,48	180,70	378,37	231,59	428,52	281,75	530,31	383,53
	4	3	487	268	Nm	145	-74	282	63	448	269	557	338	694	475		
			359,19197,67		lbf·ft	106,95	-54,58	207,99	46,47	309,78	148,25	359,93	198,40	410,82	249,30	511,87	350,34
	4	4	531	292	Nm	120	-119	258	19	395	156	464	225	533	294	670	431
			391,64215,37		lbf·ft	88,51	-87,77	190,29	14,01	291,34	115,06	342,23	165,95	393,12	216,84	494,17	317,89

## SOLENOID VALVE MOUNTING: NAMUR TYPE

Please ensure you read the IOM manual that is supplied with the solenoid valve in order to ensure correct function. This section is a guide to the function of a solenoid valve in conjunction with a pneumatic quarter turn actuator. The solenoid valves mentioned here are “**namur mounted**” with a modular “**5/2 way / 3/2 way**” (meaning either mode is possible with the same valve).

Certain facts need to be taken into consideration when mounting a namur solenoid valve to a quarter turn pneumatic actuator:


- Port “2” and “4” are always on the namur interface of the solenoid valve
- Port “2” and “4” are always connected to the namur interface of the quarter turn pneumatic actuator
- Port “1” is where instrument air is always connected to the solenoid valve
- Port “1” is always referred to as the air inlet or pressure port on a solenoid valve

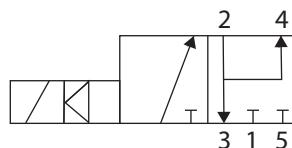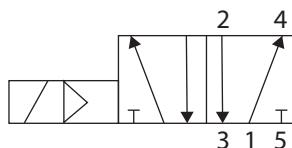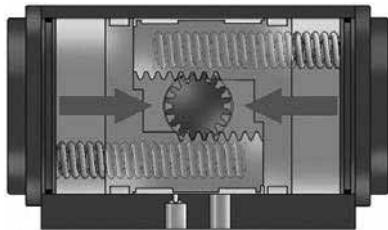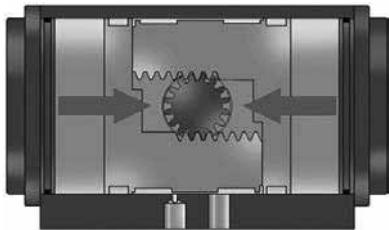

The above diagrams show a double acting actuator with 5/2 way solenoid valve (10.1) and a spring return actuator with a 5/2 way valve set up to function as a 3/2 way valve (10.2). Both valves are shown in the de-energised state (coil inactive, no electrical current). In both cases the solenoid valves port “2” is connected to the actuators port “A” through which air will vent out of port “3”. When connecting a namur solenoid valve, the pneumatic diagram will determine how to connect the ports. Only solenoid valve ports “2” and ‘4’ can be connected to the actuator. Whichever of the two ports shows a vertical arrow pointing away from it, is the port that needs to be connected to the actuators central chamber, in this case port “A”.


Please ensure you read the IOM manual that is supplied with the solenoid valve in order to ensure correct function. This section is a guide to the function of a solenoid valve in conjunction with a pneumatic quarter turn actuator. The solenoid valves mentioned here are “**namur mounted**” with a modular “**5/2 way / 3/2 way**” (meaning either mode is possible with the same valve).

## OPERATION WITH SOLENOID VALVES: DOUBLE ACTING

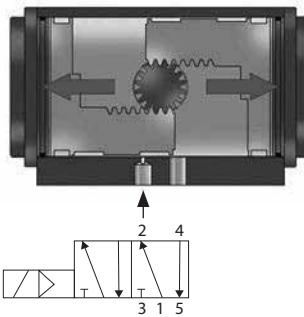

**SOLENOID COIL ENERGISED**


- This allows air to flow from solenoid inlet port "1" to solenoid port "2" which is connected to actuator port "A".
- As the air enters the center chamber of the actuator, the pistons start to move towards the open position (as indicated by the large red arrows).
- Atmospheric air from the outer chambers will vent out of actuator port "B", which is connected to solenoid port "4" and the exhausts via solenoid port "5".
- Solenoid port "3" is not used.

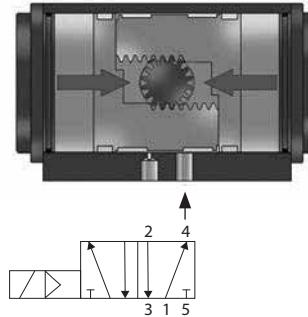

**SOLENOID COIL DE-ENERGISED**


- This allows air to flow from solenoid inlet port "1" to solenoid port "4" which is connected to actuator port "B".
- As the air enters the outer chambers of the actuator, the pistons start to move towards the closed position (as indicated by the large red arrows).
- Atmospheric air from the inner chamber will vent out of actuator port "A", which is connected to solenoid port "2" and the exhausts via solenoid port "3".
- Solenoid port "5" is not used.

## OPERATION WITH SOLENOID VALVES: SPRING RETURN

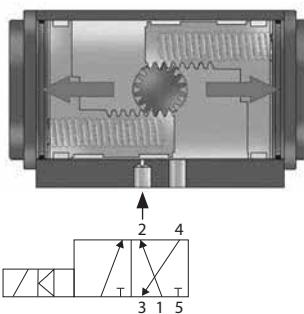

**SOLENOID COIL ENERGISED**

- This allows air to flow from solenoid inlet port "1" to solenoid port "2" which is connected to actuator port 'A'.
- As the air enters the center chamber of the actuator, the pistons start to move towards the open position and compressing the springs in the outer chambers (as indicated by the large red arrows).
- Atmospheric air from the outer chambers will vent out of actuator port "B", which is connected to solenoid port "4" and then exhausts via solenoid port "3".
- Solenoid port "5" is not used.

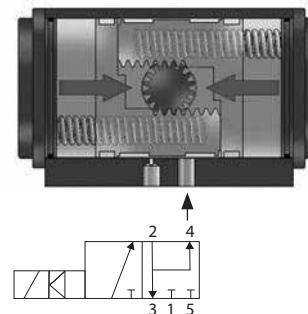

**SOLENOID COIL DE-ENERGISED**

- This closes solenoid port "1" and stops inlet air from flowing.
- The springs in the outer chambers will move the pistons back to the closed position (as indicated by the large red arrows).
- Residual air from the inner chamber will vent out of actuator port "A", which is connected to solenoid port "2" and the exhausts via solenoid port "3".
- Solenoid port "5" is not used.
- Solenoid port "2" and port "4" are also connected in a loop so no dirty air may enter the actuator (this is available only on some solenoid valves).

## MOUNTING VARIATIONS

Below are the two common variations to mounting a 90 degree or 180 degree actuator to a valve. Mounting actuators in these varying positions is due to space constraints in the global assembly or simply due to consistency with prior assemblies already in existence. Please note how the indicator puck always correctly shows the position of the valve disc and hence showing the flowpath of the medium running through the pipe.



**13.1 in-line, closed position**

Mounted in-line or parallel to the pipe, the actuator and valve are in the standard closed position.



**13.2 in-line, open position**

Mounted in-line or parallel to the pipe, the actuator and valve are in the standard open position.



**13.3 crossmount, closed position**

Mounted crossmount or offset to the pipe, the actuator and valve are in the standard closed position.



**13.4 crossmount, open position**


Mounted crossmount or offset to the pipe, the actuator and valve are in the standard open position.




## ACTUATORS DA

### Basic Operating Details

- Port "A" Air to open (anti clockwise)
- Port "B" Air to close (clockwise)
- Air supply: 6 bar; maximum 7 bar
- Drive Medium = Air (Dry or lubricated); not corrosive Gas; light hydraulic oil
- Temperature= Buna nitrile o'seals  
-40° to 80°C or -40 to 176° F
- Standard indicator position
- Basic Operating Details

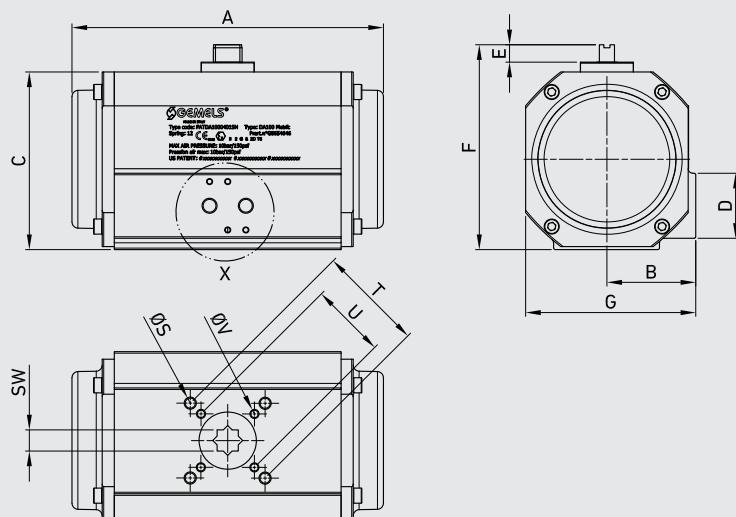

TYPE	AIR SUPPLY	Nm	lbf-ft
DA25	MPa 0,6	23,7	17,48
	Psi 87		
DA40	MPa 0,6	41,6	30,68
	Psi 87		
DA100	MPa 0,6	101,5	74,86
	Psi 87		
DA200	MPa 0,6	201,9	148,91
	Psi 87		
DA375	MPa 0,6	374	275,85
	Psi 87		
DA825	MPa 0,6	824	607,75
	Psi 87		

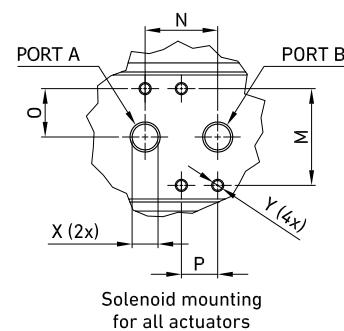


## DA ACTUATORS (double acting)

TYPE	ISO5211	A	B	C	D	E	F	G	M	N	O	P	ØS	T	ØV	U	X	Y	SW	WEIGHT	ITEM CODE
DA25	F03-F05	mm 160	38	70	40	20	90	69,5	32	24	16	12	M6	50 1,97	M5	36 1,42	G1/8 x 12	M5X8	9 0,35	kg 1 lb 2,20	FATDA0250401SH
		inch 6,30	1,50	2,76	1,57	0,79	3,54	2,74	1,26	0,94	0,63	0,47									
DA40	F05	mm 138,5	47,5	90,5	41	20	110,5	87,5	32	24	16	12	-	-	M6	50 1,97	G1/8 x 12	M5X8	11 0,43	kg 1,8 lb 3,97	FATDA0400401SH
		inch 5,45	1,87	3,56	1,61	0,79	4,35	3,44	1,26	0,94	0,63	0,47									
DA100	F05-F07	mm 222,5	59	118	43	20	138	113	32	24	16	12	M8	70 2,76	M6	50 1,97	G1/8 x 12	M5X8	14 0,55	kg 2,8 lb 6,17	FATDA1000401SH
		inch 8,76	2,32	4,65	1,69	0,79	5,43	4,45	1,26	0,94	0,63	0,47									
DA200	F05-F07	mm 238	72	140,5	43	20	160,5	136,5	32	24	16	12	M8	70 2,76	M6	50 1,97	G1/4 x 12	M5X8	17 0,67	kg 7 lb 15,43	FATDA2000401SH
		inch 9,37	2,83	5,53	1,69	0,79	6,32	5,37	1,26	0,94	0,63	0,47									
DA375	F07-F10	mm 286	78	166,5	43	30	196,5	156	32	24	16	12	M10	102 4,02	M8	70 2,76	G1/4 x 12	M5X8	22 0,87	kg 10,5 lb 23,15	FATDA3750401SH
		inch 11,26	3,07	6,56	1,69	1,18	7,74	6,14	1,26	0,94	0,63	0,47									
DA825	F10-F12	mm 360	95,5	207,5	43	30	237,5	191	32	24	16	12	M12	125 4,92	M10	102 4,02	G1/4 x 12	M5X8	27 1,06	kg 22,4 lb 49,38	FATDA8250401SH
		inch 14,17	3,76	8,17	1,69	1,18	9,35	7,52	1,26	0,94	0,63	0,47									

## DA ACTUATORS KITS

TYPE	BALL VALVES	DN	MATERIAL	ISO5211	WEIGHT	ITEM CODE
AK6	GE-GHP-GR-SB	06-10-13	CARBON STEEL	F03-F03	kg 0,25 lb 0,55	K0C00AK61X
AK6S	GN	06-10	CARBON STEEL	F03 F05-F03 F05	kg 0,30 lb 0,66	K0C00AK6S1X
AK6S2	GM1-GN	06-10-13	CARBON STEEL	F03-F05	kg 0,25 lb 0,55	K01A00194AAAA0H
AK13	GE-GHP-GR	13	CARBON STEEL	F03-F05	kg 0,31 lb 0,68	K0C00AK131X
AK20	GE-GB-GHP GN-GR-SB	20-25	CARBON STELL	F05 F07-F05	kg 0,52 lb 1,15	K0C00AK201X
AK32	SB	32-40	CARBON STEEL	F05 F07-F05	kg 0,60 lb 1,32	K0C00AK321X
AK40	GB-GHP-G GR-SB	32-40	CARBON STEEL	F05 F07-F05	kg 0,67 lb 1,48	K0C00AK401X
AK50	GB-GHP-GN GR-SB	50	CARBON STEEL	F05 F07-F05	kg 0,71 lb 1,57	K0C00AK501X
AK65	SB	65-80	CARBON STEEL	F05 F07-F05	kg 0,74 lb 1,63	K0C00AK651X
AK100	GR-SB	100-125	CARBON STEEL	F10 F12-F12	kg 2,05 lb 4,52	K0C00AK1001X

KIT WASHER  
ONLY FOR GN-GB VALVES  
KIT ACTUATOR  
C0034406H FROM DN6 TO DN32  
C0034306H FOR DN40-DN50


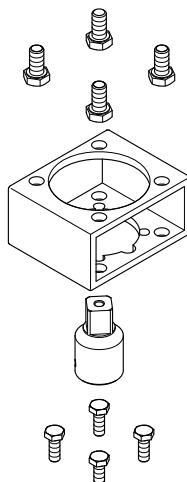




## ACTUATORS SR

### Basic Operating Details


- Port "A" Air to open (anti clockwise)
- Port "B" Air to close (clockwise)
- Air supply: 6 bar; maximum 7 bar
- Drive Medium = Air (Dry or lubricated); not corrosive Gas; light hydraulic oil
- Temperature= Buna nitrile o'seals  
-40° to 80°C or -40 to 176° F
- Standard indicator position

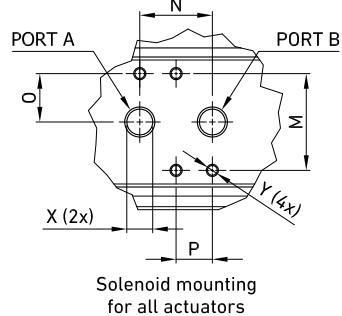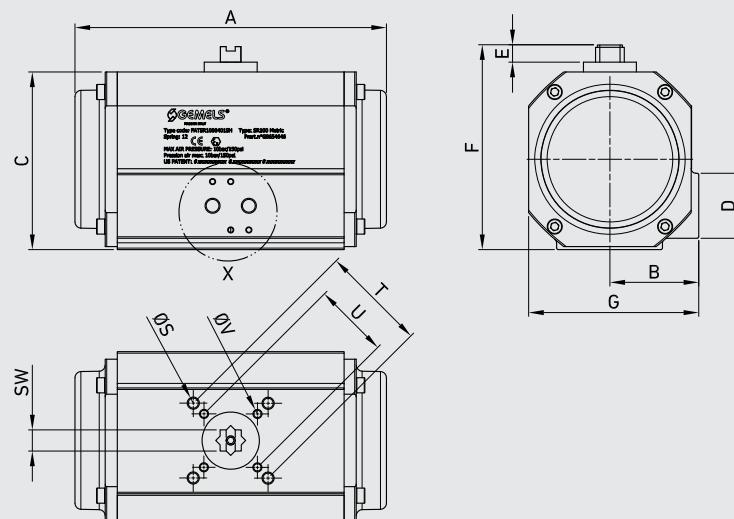

TYPE	AIR SUPPLY	AIR-START		AIR-END		SPRING-START		SPRING-END		N°SPRING
		Nm	lbf·ft	Nm	lbf·ft	Nm	lbf·ft	Nm	lbf·ft	
SR35/(18)	MPa 0,6	32,7	24,12	18,1	13,35	32,64	24,07	18	13,28	12
	Psi 87									
SR60/(40)	MPa 0,6	61,4	45,29	40,1	29,58	61,3	45,21	40	29,50	12
	Psi 87									
SR130/(72)	MPa 0,6	130,33	96,13	71,73	52,91	130,2	96,03	71,6	52,81	4X4
	Psi 87									
SR240/(132)	MPa 0,6	241,54	178,15	132,98	98,08	241,2	177,90	132,64	97,83	4X4
	Psi 87									
SR385/(210)	MPa 0,6	385,2	284,11	212,1	156,44	384,6	283,67	211,5	155,99	4X4
	Psi 87									
SR530/(290)	MPa 0,6	533	393,12	294	216,84	531	391,64	292	215,37	4X4
	Psi 87									

## SR ACTUATORS (SPRING RETURN)

TYPE	ISO5211	A	B	C	D	E	F	G	M	N	O	P	ØS	T	ØV	U	X	Y	SW	WEIGHT	ITEM CODE
SR35/(18)	F05-F07	mm 203	49	87	40	20	107	90,5	32	24	16	12	M8	70	M6	50	G1/8x12	M5x8	11	kg 1,9	FATSR0500401SH
		inch 7,99	1,93	3,43	1,57	0,79	4,21	3,56	1,26	0,94	0,63	0,47		2,76		1,97			0,43	lb 4,19	
SR60/(40)	F05-F07	mm 222,5	59	118	43	20	138	113	32	24	16	12	M8	70	M6	50	G1/8x12	M5x8	14	kg 2,8	FATSR1000401SH
		inch 8,76	2,32	4,65	1,69	0,79	5,43	4,45	1,26	0,94	0,63	0,47		2,76		1,97			0,55	lb	
SR130/(72)	F07-F10	mm 238	72	140,5	43	20	160,5	136,5	32	24	16	12	M8	102	M6	70	G1/4x12	M5x8	17	kg 7	FATSR2000401SH
		inch 9,37	2,83	5,53	1,69	0,79	6,32	5,37	1,26	0,94	0,63	0,47		4,02		2,76			0,67	lb 15,43	
SR240/(132)	F07-F10	mm 286	78	166,5	43	30	196,5	156	32	24	16	12	M10	102	M8	70	G1/4x12	M5x8	22	kg 10,5	FATSR3750401SH
		inch 11,26	3,07	6,56	1,69	1,18	7,74	6,14	1,26	0,94	0,63	0,47		4,02		2,76			0,87	lb 23,15	
SR385/(210)	F10-F12	mm 334	95,5	207,5	43	30	237,5	191	32	24	16	12	M12	125	M10	102	G1/4x12	M5x8	27	kg 20,6	FATSR6000401SH
		inch 13,15	3,76	8,17	1,69	1,18	9,35	7,52	1,26	0,94	0,63	0,47		4,92		4,02			1,06	lb 45,42	
SR530/(290)	F10-F12	mm 360	95,5	207,5	43	30	237,5	191	32	24	16	12	M12	125	M10	102	G1/4x12	M5x8	27	kg 22,4	FATSR8250401SH
		inch 14,17	3,76	8,17	1,69	1,18	9,35	7,52	1,26	0,94	0,63	0,47		4,92		4,02			1,06	lb 49,38	

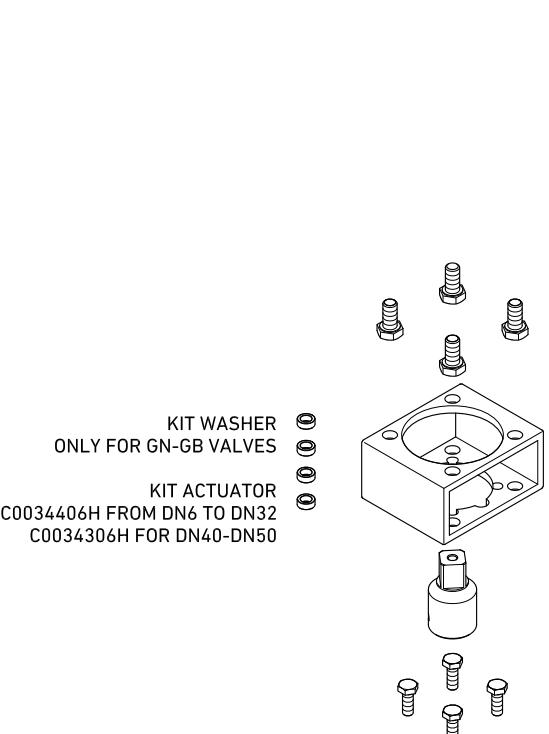


## DA ACTUATORS KITS

TYPE	BALL VALVES	DN	MATERIAL	ISO5211	WEIGHT	ITEM CODE
AK6	GE-GHP-GR-SB	06-10-13	CARBON STEEL	F03-F03	kg 0,25 lb 0,55	K0C00AK61X
AK6S	GN	06-10	CARBON STEEL	F03 F05-F03 F05	kg 0,30 lb 0,66	K0C00AK6S1X
AK6S2	GM1-GN	06-10-13	CARBON STEEL	F03-F05	kg 0,25 lb 0,55	K01A00194AAAAOH
AK13	GE-GHP-GR	13	CARBON STEEL	F03-F05	kg 0,31 lb 0,68	K0C00AK131X
AK20	GE-GB-GHP GN-GR-SB	20-25	CARBON STELL	F05 F07-F05	kg 0,52 lb 1,15	K0C00AK201X
AK32	SB	32-40	CARBON STEEL	F05 F07-F05	kg 0,60 lb 1,32	K0C00AK321X
AK40	GB-GHP-G GR-SB	32-40	CARBON STEEL	F05 F07-F05	kg 0,67 lb 1,48	K0C00AK401X
AK50	GB-GHP-GN GR-SB	50	CARBON STEEL	F05 F07-F05	kg 0,71 lb 1,57	K0C00AK501X
AK65	SB	65-80	CARBON STEEL	F05 F07-F05	kg 0,74 lb 1,63	K0C00AK651X
AK100	GR-SB	100-125	CARBON STEEL	F10 F12-F12	kg 2,05 lb 4,52	K0C00AK1001X



## J4C ELECTRIC ACTUATOR

- Housing: Anticorrosive polyamide (lid & body)
- Main external shaft: Anticorrosive polyamide
- External screws: stainless steel
- Gears: steel and polyamide
- Visual position indicator: Polyamide
- Dome: Polycarbonate
- Adjustable internal cams: Polyamide
- Electric motor: 24VDS Brushless motor
- Insulation: Class B

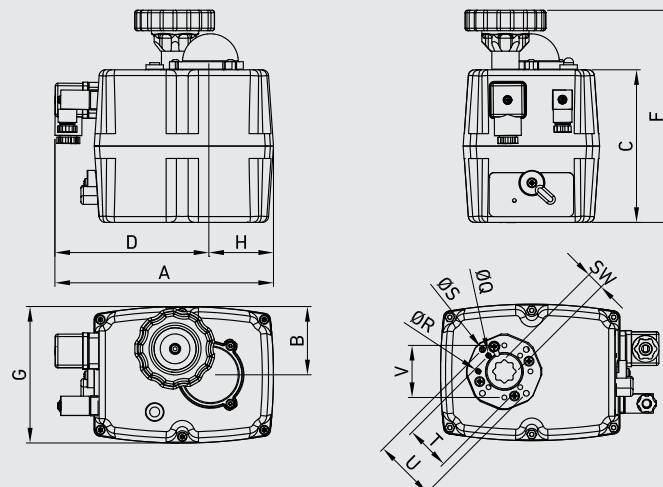

### OPTIONS

- J4C S20/S85 DPS 2015 digital positioner: 4-20mA, 0-20mA, 0-10V or 1-10V.
- J4C S20/S85 BSR 2015 emergency fail safe kit system by battery
- Digital potentiometer: 1K, 5K or 10K.
- 3 position actuator: 0o-45o-90o or 0o-90o-180o (only for J4C-S35)

TYPE	BALL VALVES	DN
J4C-20	GE-GHP-GN	06-10
J4C-35	GE-GHP-GN-GR-SB	13

## VALVE WITH ELECTRICAL ACTUATORS

TYPE	VOLTAGE	ISO5211	A	B	C	D	F	G	H	ØQ	ØR	ØS	T	U	V	SW	WEIGHT	ITEM CODE
J4C-S20	24 to 240 VAC/VDC	F03-F04-F05	mm 181 inch 7,13	55 2,17	123 4,84	130 5,12	169 6,65	110 4,33	51 2,01	M5	M5	M6	36 1,42	50 1,97	42 1,65	9 or 11 or 14	kg 1,8 lb 3,97	FAEJ3H2025HH
J4C-B20	12 VAC/VDC	F03-F04-F05	mm 181 inch 7,13	55 2,17	123 4,84	130 5,12	169 6,65	110 4,33	51 2,01	M5	M5	M6	36 1,42	50 1,97	42 1,65	9 or 11 or 14	kg 1,8 lb 3,97	FAEJ3L2025HH
J4C-S35	24 to 240 VAC/VDC	F03-F04-F05	mm 181 inch 7,13	55 2,17	123 4,84	130 5,12	169 6,65	110 4,33	51 2,01	M5	M5	M6	36 1,42	50 1,97	42 1,65	9 or 11 or 14	kg 1,9 lb 4,19	FAEJ3H3540HH
J4C-B35	12 VAC/VDC	F03-F04-F05	mm 181 inch 7,13	55 2,17	123 4,84	130 5,12	169 6,65	110 4,33	51 2,01	M5	M5	M6	36 1,42	50 1,97	42 1,65	9 or 11 or 14	kg 1,9 lb 4,19	FAEJ3L3540HH

		J4C-S20		J4C-S35	
Voltage		24 a to 240 VAC/VDC -0/+5% 12 VDC/VAC 0/+5% Change the power supply PCB		24 a to 240 VAC/VDC -0/+5% 12 VDC/VAC 0/+5% Change the power supply PCB	
Operation time unload		10 Sec./90°		10 Sec./90°	
Maximum torque break	Nm	25		38	
	lbf-ft	18,44		28,03	
Maximum operational torque	Nm	20		35	
	lbf-ft	14,75		25,81	
Duty rating %		75,00%		75,00%	
Working angle		0° TO 270°		0° TO 270°	
Limit switch		4 SPDT NO micro (2 motor stop and 2 confirmations)		4 SPDT NO micro (2 motor stop and 2 confirmations)	
Heater		3,5W		3,5W	
Big Plugs		EN175301-803 FORM A		EN175301-803 FORM A	
Small Plug		DIN43650/C		DIN43650/C	
IP rating		IP-67		IP-67	
Temperature	°C	-20°+70°		-20°+70°	
	F°	-4° + 158°		-4° + 158°	
Weight	kg	1,8		1,9	
	lbs	3,97		4,19	


## ACTUATORS

## KITS



## J4C ELECTRIC ACTUATOR

- Housing: Anticorrosive polyamide (lid & body)
- Main external shaft: stainless steel
- External screws: stainless steel
- Gears: Steel and polyamide
- Visual position indicator: Polyamide
- Dome: Polycarbonate
- Adjustable internal cams: Polyamide
- Electric motor: 24VDS Brushless motor
- Insulation: Class B

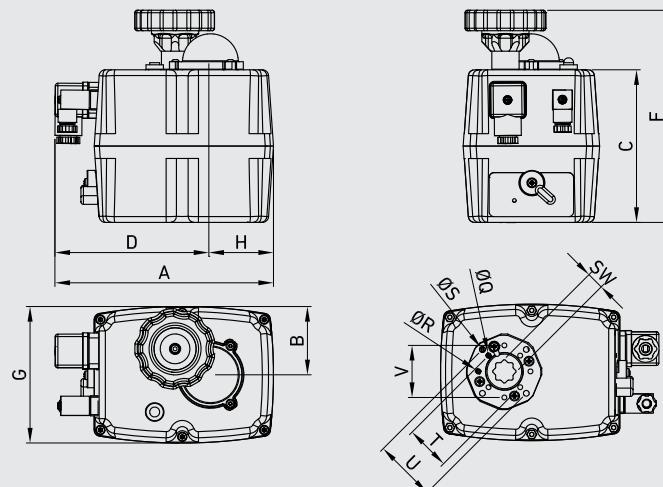

## OPTIONS

- J4C S20/S85 DPS 2015 digital positioner: 4-20mA, 0-20mA, 0-10V or 1-10V.
- J4C S20/S85 BSR 2015 emergency fail safe kit system by battery
- Digital potentiometer: 1K, 5K or 10K.
- 3 position actuator: 0o-45o-90o or 0o-90o-180o

TYPE	BALL VALVES	DN
J4C-55	GE-GHP-GN-GR-SB	20
J4C-85	GE-GHP-GN-GR-SB	25

## VALVE WITH ELECTRICAL ACTUATORS

TYPE	VOLTAGE	ISO5211	A	B	C	D	F	G	H	ØQ	ØR	ØS	T	U	V	SW	WEIGHT	ITEM CODE
J4C-S55	24 to 240 VAC/VDC	F05-F07	mm 181 inch 7,13	55 2,17	148 5,83	130 5,12	196 7,72	110 4,33	51 2,01	M6	M8	-	50 1,97	70 2,76	-	11 or 14 or 17	kg 2,4 lb 5,29	FAEJ3H5560HH
J4C-B55	12 VAC/VDC	F05-F07	mm 181 inch 7,13	55 2,17	148 5,83	130 5,12	196 7,72	110 4,33	51 2,01	M6	M8	-	50 1,97	70 2,76	-	11 or 14 or 17	kg 2,4 lb 5,29	FAEJ3L5560HH
J4C-S85	24 to 240 VAC/VDC	F05-F07	mm 181 inch 7,13	55 2,17	148 5,83	130 5,12	196 7,72	110 4,33	51 2,01	M6	M8	-	50 1,97	70 2,76	-	11 or 14 or 17	kg 3 lb 6,61	FAEJ3H8590HH
J4C-B85	12 VAC/VDC	F05-F07	mm 181 inch 7,13	55 2,17	148 5,83	130 5,12	196 7,72	110 4,33	51 2,01	M6	M8	-	50 1,97	70 2,76	-	11 or 14 or 17	kg 3 lb 6,61	FAEJ3L8590HH

		J4C-S55	J4C-S85
Voltage		24 a to 240 VAC/VDC -0/+5% 12 VDC/VAC 0/+5%	24 a to 240 VAC/VDC -0/+5% 12 VDC/VAC 0/+5%
Operation time unload		13sec/90°	29sec/90°
Maximum torque break	Nm	60	90
	lbf-ft	44,25	66,38
Maximum operational torque	Nm	55	85
	lbf-ft	40,57	62,69
Duty rating %		75,00%	75,00%
Working angle		0° TO 270°	0° TO 270°
Limit switch		4 SPDT NO micro (2 motor stop and 2 confirmations)	4 SPDT NO micro (2 motor stop and 2 confirmations)
Heater		3,5W	3,5W
Big Plugs		EN175301-803 FORM A	EN175301-803 FORM A
Small Plug		DIN43650/C	DIN43650/C
IP rating		IP-67	IP-67
Temperature	C°	-20°+70°	-20°+70°
	F°	-4° + 158°	-4° + 158°
Weight	kg	2,4	3
	lbs	5,29	6,61


## ACTUATORS

## KITS



## J4C ELECTRIC ACTUATOR

- Housing:  
Body and cover: anticorrosive polyamide  
Main external shaft: stainless steel
- Fastening: stainless steel
- Gears: steel and polyamide
- Indicator: polyamide + glass filled
- Internal cams: polyamide + glass filled
- Electric motor: 24VDS Brushless motor
- Insulation: class B
- Service S4
- Duty range: 75%

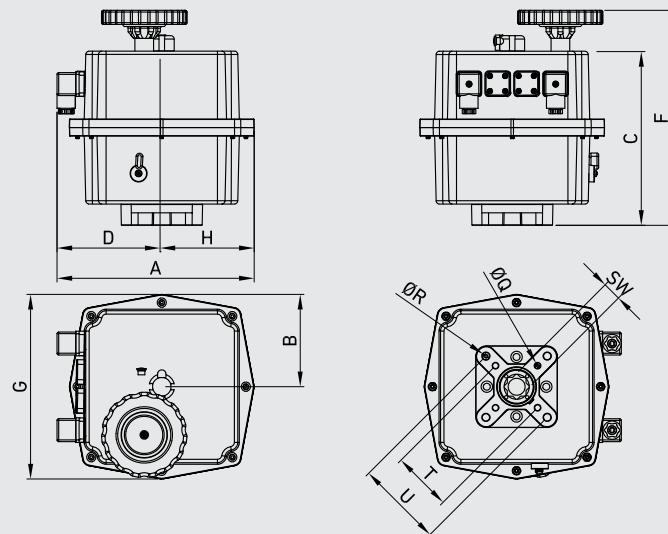

### OPTIONS

- DPS2005 digital positioner: 0÷20mA, 4÷20mA o 0÷10V
- Digital potentiometer kit: 1K, 5K and 10K
- BSR battery fail safe kit
- 3 positions: 0° 45° 90° / 0° 90° 180°

TYPE	BALL VALVES	DN
J4-140	GB-GHP-GN-GR-SB	32-40
J4-300	GB-GHP-GN-GR-SB	50


## VALVE WITH ELECTRICAL ACTUATORS

TYPE	VOLTAGE	ISO5211	A	B	C	D	F	G	H	ØQ	ØR	ØS	T	U	V	SW	WEIGHT	ITEM CODE
J4C-S140	24 to 240 VAC/VDC	F07-F10	mm 235	107	205	128	254	214	107	M6	M8	-	70	102	-	17 or 22	kg 5,2 lb 11,46	FAEJ3H140170HH
			inch 9,25	4,21	8,07	5,04	10,00	8,43	4,21				2,76	4,02				
J4C-B140	12 VAC/VDC	F07-F10	mm 235	107	205	128	254	214	107	M6	M8	-	70	102	-	17 or 22	kg 5,2 lb 11,46	FAEJ3L140170HH
			inch 9,25	4,21	8,07	5,04	10,00	8,43	4,21				2,76	4,02				
J4C-S300	24 to 240 VAC/VDC	F07-F10	mm 235	107	205	128	254	214	107	M6	M8	-	70	102	-	17 or 22	kg 5,2 lb 11,46	FAEJ3H300350HH
			inch 9,25	4,21	8,07	5,04	10,00	8,43	4,21				2,76	4,02				
J4C-B300	12 VAC/VDC	F07-F10	mm 235	107	205	128	254	214	107	M6	M8	-	70	102	-	17 or 22	kg 5,2 lb 11,46	FAEJ3L300350HH
			inch 9,25	4,21	8,07	5,04	10,00	8,43	4,21				2,76	4,02				

		J4C-S140		J4C-S300	
Voltage		24 a to 240 VAC/VDC -0/+5% 12 VDC/VAC 0/+5%		24 a to 240 VAC/VDC -0/+5% 12 VDC/VAC 0/+5%	
Operation time unload		25sec/90°		48sec/90°	
Maximum torque break		Nm		170	
		lbf-ft		125,39	
Maximum operational torque		Nm		140	
		lbf-ft		103,26	
Duty rating %		75,00%		75,00%	
Working angle		0° TO 270°		0° TO 270°	
Limit switch		4 SPDT NO micro (2 motor stop and 2 confirmations)		4 SPDT NO micro (2 motor stop and 2 confirmations)	
Heater		3,5W		3,5W	
Big Plugs		EN175301-803 FORM A		EN175301-803 FORM A	
Small Plug		DIN43650/C		DIN43650/C	
IP rating		IP-67		IP-67	
Temperature		C°		-20°+70°	
		F°		-4° + 158°	
Weight		kg		5,2	
		lbs		11,46	

## ACTUATORS KITS

TYPE	BALL VALVES	DN	MATERIAL	ISO5211	WEIGHT	ITEM CODE
AK65	SB	65-80	CARBON STEEL	F05 F07-F05	kg 0,74 lb 1,63	KOC00AK651X
AK32	SB	32-40	CARBON STEEL	F05 F07-F05	kg 0,60 lb 1,32	KOC00AK321X
AK40	GB-GHP-GN-GR-SB	32-40	CARBON STEEL	F05 F07-F05	kg 0,67 lb 1,48	KOC00AK401X
AK20	GE-GB-GHP-GN-GR-SB	20-25	CARBON STEEL	F05 F07-F05	kg 0,52 lb 1,15	KOC00AK201X
AK6	GE-GHP-GN-GR-SB	06-10-13	CARBON STEEL	F03-F03	kg 0,25 lb 0,55	KOC00AK61X
AK13	GE-GHP-GN-GR	13	CARBON STEEL	F03-F05	kg 0,31 lb 0,68	KOC00AK131X
AK100	GR-SB	100-125	CARBON STEEL	F10 F12-F12	kg 2,05 lb 4,52	KOC00AK1001X
AK50	GB-GHP-GN-GR-SB	50	CARBON STEEL	F05 F07-F05	kg 0,71 lb 1,57	KOC00AK501X
AK6S	GN	06-10-13	CARBON STEEL	F03 F05-F03 F05	kg 0,30 lb 0,66	KOC00AK6S1X

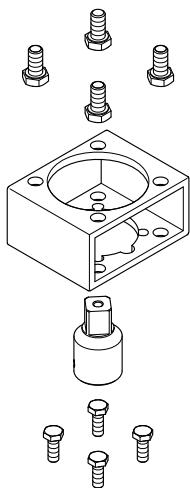

KIT WASHER  
ONLY FOR GN-GB VALVES  
KIT ACTUATOR  
C0034406H FROM DN6 TO DN32  
C0034306H FOR DN40-DN50

## J4C 20 CONSUMPTION

Voltage	Model	Unload		Max. Operational Torque 20Nm		Max. Torque Break 25Nm	
		A	W	A	W	A	W
12VDC	B20	Nm	0,75	9,06	1,8	21,6	1,95
		lbf-ft	0,55	6,68	1,33	15,93	1,44
24VDC	S20	Nm	0,45	10,77	0,9	21,49	0,97
		lbf-ft	0,33	7,94	0,66	15,85	0,72
48VDC	S20	Nm	0,21	9,93	0,42	20,38	0,46
		lbf-ft	0,15	7,32	0,31	15,03	0,34
110 VDC	S20	Nm	0,07	8	0,13	14,3	0,14
		lbf-ft	0,05	5,90	0,10	10,55	0,10
12VAC	B20	Nm	1,04	12,51	1,85	22,18	2,28
		lbf-ft	0,77	9,23	1,36	16,36	1,68
24VAC	S20	Nm	0,59	14,2	1,12	26,77	1,28
		lbf-ft	0,44	10,47	0,83	19,74	0,94
48VAC	S20	Nm	0,34	16,37	0,69	33,16	0,75
		lbf-ft	0,25	12,07	0,51	24,46	0,55
110 VAC	S20	Nm	0,14	15,73	0,27	29,52	0,3
		lbf-ft	0,10	11,60	0,20	21,77	0,22
240 VAC	S20	Nm	0,1	23,76	0,15	36,43	0,16
		lbf-ft	0,07	17,52	0,11	26,87	0,12

## J4C 35 CONSUMPTION

Voltage	Model	Unload		Max. Operational Torque 35Nm		Max. Torque Break 38Nm	
		A	W	A	W	A	W
12VDC	B35	Nm	0,75	9,06	2,38	28,62	2,62
		lbf-ft	0,55	6,68	1,76	21,11	1,93
24VDC	S35	Nm	0,45	10,77	1,28	30,78	1,37
		lbf-ft	0,33	7,94	0,94	22,70	1,01
48VDC	S35	Nm	0,21	9,93	0,56	26,72	0,59
		lbf-ft	0,15	7,32	0,41	19,71	0,44
110 VDC	S35	Nm	0,07	7,7	0,17	18,9	0,18
		lbf-ft	0,05	5,68	0,13	13,94	0,13
12VAC	B35	Nm	1,04	12,51	2,75	33	3,19
		lbf-ft	0,77	9,23	2,03	24,34	2,35
24VAC	S35	Nm	0,59	14,2	1,58	37,8	1,67
		lbf-ft	0,44	10,47	1,17	27,88	1,23
48VAC	S35	Nm	0,34	16,37	0,92	44,04	0,99
		lbf-ft	0,25	12,07	0,68	32,48	0,73
110 VAC	S35	Nm	0,14	15,73	0,36	39,45	0,38
		lbf-ft	0,10	11,60	0,27	29,10	0,28
240 VAC	S35	Nm	0,1	23,76	0,19	45,41	0,2
		lbf-ft	0,07	17,52	0,14	33,49	0,15

## J4C 55 CONSUMPTION

Voltage	Model		Unload		Max. Operational Torque 55Nm		Max. Torque Break 60Nm	
			A	W	A	W	A	W
12VDC	B55	Nm	0,7	8,45	3,04	36,43	3,42	41,05
		lbf-ft	0,52	6,23	2,24	26,87	2,52	30,28
24VDC	S55	Nm	0,42	10,19	1,55	37,17	1,63	39,02
		lbf-ft	0,31	7,52	1,14	27,42	1,20	28,78
48VDC	S55	Nm	0,2	9,72	0,61	29,25	0,67	32,31
		lbf-ft	0,15	7,17	0,45	21,57	0,49	23,83
110 VDC	S55	Nm	0,07	7,5	0,19	20,8	0,21	23,2
		lbf-ft	0,05	5,53	0,14	15,34	0,15	17,11
12VAC	B55	Nm	0,94	11,3	3,43	41,18	3,78	45,41
		lbf-ft	0,69	8,33	2,53	30,37	2,79	33,49
24VAC	S55	Nm	0,58	13,89	1,87	44,88	1,98	47,52
		lbf-ft	0,43	10,24	1,38	33,10	1,46	35,05
48VAC	S55	Nm	0,33	15,73	1,1	52,8	1,21	58,29
		lbf-ft	0,24	11,60	0,81	38,94	0,89	42,99
110 VAC	S55	Nm	0,14	15,73	0,4	43,8	0,43	46,95
		lbf-ft	0,10	11,60	0,30	32,31	0,32	34,63
240 VAC	S55	Nm	0,09	22,7	0,2	47,52	0,21	50,16
		lbf-ft	0,07	16,74	0,15	35,05	0,15	37,00

## J4C 85 CONSUMPTION

Voltage	Model		Unload		Max. Operational Torque -85Nm		Max. Torque Break -90Nm	
			A	W	A	W	A	W
12VDC	B85	Nm	0,62	7,42	2,11	25,34	2,28	27,32
		lbf-ft	0,46	5,47	1,56	18,69	1,68	20,15
24VDC	S85	Nm	0,36	8,55	1,08	25,87	1,22	29,3
		lbf-ft	0,27	6,31	0,80	19,08	0,90	21,61
48VDC	S85	Nm	0,17	8,24	0,48	22,92	0,53	25,56
		lbf-ft	0,13	6,08	0,35	16,90	0,39	18,85
110 VDC	S85	Nm	0,05	5,8	0,14	15,2	0,16	17,9
		lbf-ft	0,04	4,28	0,10	11,21	0,12	13,20
12VAC	B85	Nm	0,81	9,69	2,38	28,51	2,65	31,81
		lbf-ft	0,60	7,15	1,76	21,03	1,95	23,46
24VAC	S85	Nm	0,5	11,88	1,36	32,74	1,5	36,01
		lbf-ft	0,37	8,76	1,00	24,15	1,11	26,56
48VAC	S85	Nm	0,25	11,83	0,77	37,07	0,86	41,18
		lbf-ft	0,18	8,73	0,57	27,34	0,63	30,37
110 VAC	S85	Nm	0,12	12,83	0,31	33,64	0,33	36,54
		lbf-ft	0,09	9,46	0,23	24,81	0,24	26,95
240 VAC	S85	Nm	0,08	20,06	0,17	40,13	0,18	42,77
		lbf-ft	0,06	14,80	0,13	29,60	0,13	31,55

## J4C 140 CONSUMPTION

Voltage	Model	Unload		Max. Operational Torque -140Nm		Max. Torque Break -170Nm	
		A	W	A	W	A	W
12VDC	B140	Nm	1,93	23,1	4,73	56,76	5,39
		lbf-ft	1,42	17,04	3,49	41,86	3,98
24VDC	S140	Nm	0,66	15,84	2,15	51,48	2,53
		lbf-ft	0,49	11,68	1,59	37,97	1,87
48VDC	S140	Nm	0,3	14,25	0,88	42,24	1,1
		lbf-ft	0,22	10,51	0,65	31,15	0,81
110 VDC	S140	Nm	0,1	10,89	0,28	30,25	0,39
		lbf-ft	0,07	8,03	0,21	22,31	0,29
12VAC	B140	Nm	2,75	33	6,6	79,2	8,47
		lbf-ft	2,03	24,34	4,87	58,41	6,25
24VAC	S140	Nm	0,83	19,8	2,59	62,04	3,3
		lbf-ft	0,61	14,60	1,91	45,76	2,43
48VAC	S140	Nm	0,48	23,23	1,43	68,64	1,79
		lbf-ft	0,35	17,13	1,05	50,63	1,32
110 VAC	S140	Nm	0,23	25,41	0,63	68,97	0,72
		lbf-ft	0,17	18,74	0,46	50,87	0,53
240 VAC	S140	Nm	0,18	42,24	0,39	90,4	0,44
		lbf-ft	0,13	31,15	0,29	66,68	0,32


## J4C 300 CONSUMPTION

Voltage	Model	Unload		Max. Operational Torque -300Nm		Max. Torque Break -350Nm	
		A	W	A	W	A	W
12VDC	B300	Nm	1,32	15,84	5,17	62,04	5,45
		lbf-ft	0,97	11,68	3,81	45,76	4,02
24VDC	S300	Nm	0,5	11,88	2,31	55,44	2,7
		lbf-ft	0,37	8,76	1,70	40,89	1,99
48VDC	S300	Nm	0,22	10,56	1,1	52,8	1,19
		lbf-ft	0,16	7,79	0,81	38,94	0,88
110 VDC	S300	Nm	0,09	9,68	0,33	36,3	0,39
		lbf-ft	0,07	7,14	0,24	26,77	0,29
12VAC	B300	Nm	1,98	23,76	7,26	87,12	8,64
		lbf-ft	1,46	17,52	5,35	64,26	6,37
24VAC	S300	Nm	0,66	15,84	2,75	66	3,3
		lbf-ft	0,49	11,68	2,03	48,68	2,43
48VAC	S300	Nm	0,36	17,42	1,65	79,2	1,87
		lbf-ft	0,27	12,85	1,22	58,41	1,38
110 VAC	S300	Nm	0,19	20,57	0,66	72,6	0,77
		lbf-ft	0,14	15,17	0,49	53,55	0,57
240 VAC	S300	Nm	0,15	36,96	0,42	100,32	0,47
		lbf-ft	0,11	27,26	0,31	73,99	0,35

## TECHNICAL DATA

## ELECTRIC ACTUATOR

MANUAL OVERRIDE

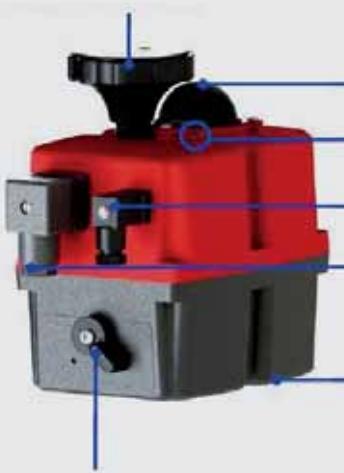

POSITION INDICATOR

VOLT FREE CONTACT PLUG

POWER SUPPLY PLUG

ISO MULTIFLANGE

AUTOMATIC - MANUAL LEVER

## 3 WIRES ON - OFF

A = power supply plug

A: VAC 3 WIRES (Grey plug)

PIN 1 = Neutral + PIN 2 = Phase = Close  
PIN 1 = Neutral + PIN 3 = Phase = Open


A: VDC 3 WIRES (Grey plug)

PIN 1 = (-) Negative + PIN 2 = Phase = Close  
PIN 1 = (-) Negative + PIN 3 = Phase = Open


B: Volt free contact, plug

PIN 1 / PIN 2 = Close  
PIN 1 / PIN 3 = Open

J4C 20/85

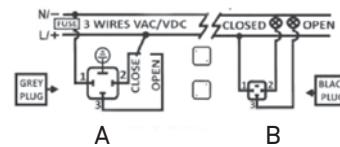

J4C 20/85

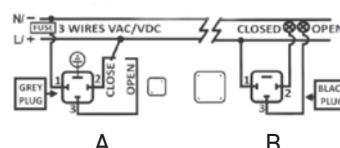

ON-OFF ACTUATOR	ACTUATOR OPERATIONAL STATUS											
Without power supply												
In open position												
In close position												
Opening												
Closing												
Torque limiter function on, moving from close to open												
Torque limiter function on, moving from open to open												
Actuator in manual mode (exceed time)												
The actuators has stopped (no close/no open position)												
In middle position												

## 2 WIRES ON - OFF

A = power supply plug


A: VDC 2 WIRES (Grey plug)

PIN 2 = (+) Positive + PIN 3 = (-) Negative = Close  
PIN 2 = (-) Negative + PIN 3 = (+) Positive = Open


B: Volt free contact, plug

PIN 1 / PIN 2 = Close  
PIN 1 / PIN 3 = Open

**J4C 20/85**

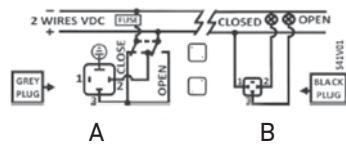

**J4C 20/85**

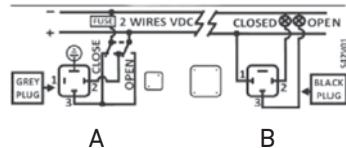

## LIMIT SWITCH Series


KITS




# LIMIT SWITCH

Edition. 21.0

## ACTUATED / MANUAL VALVES

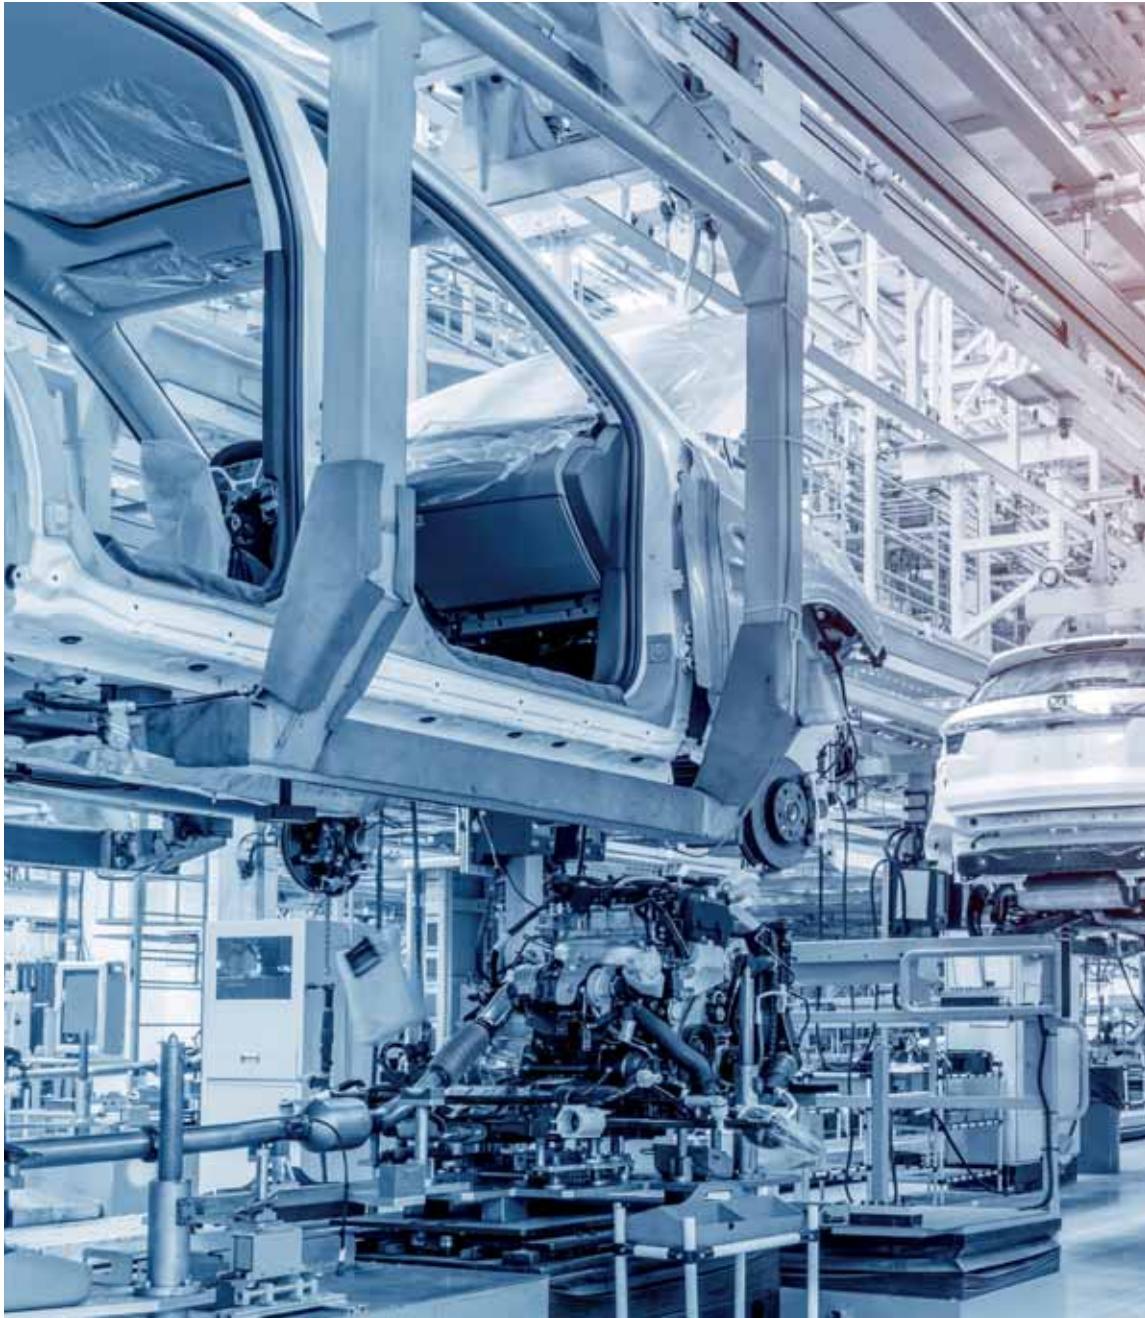

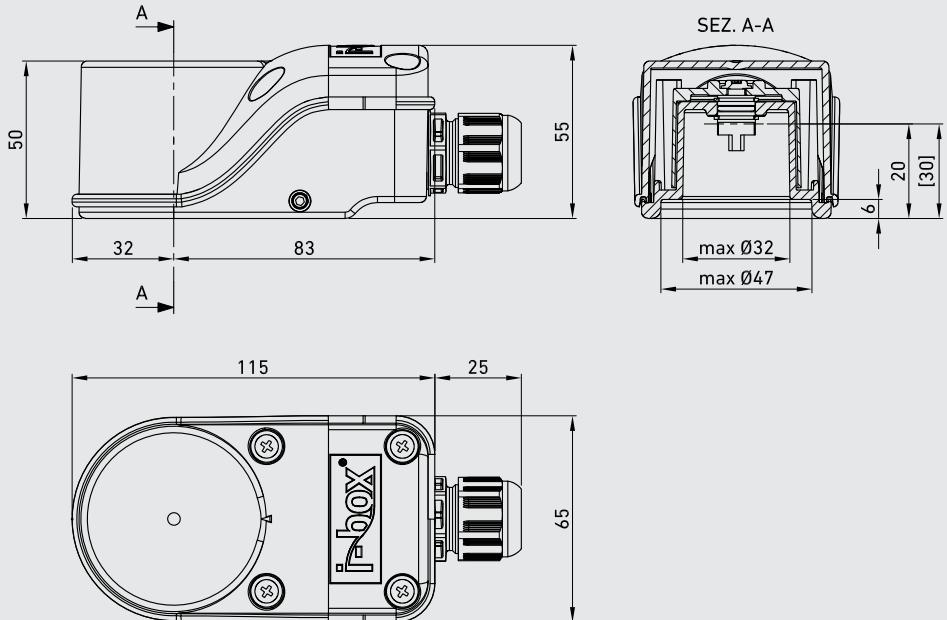


## IP

CODE	DESCRIPTION	HOLDS
FAAAAAAA010AA0H	Limit switch IP2M01	80x30

## DESCRIPTION

- Very compact limit switch box polyamide PA6
- Transparent polycarbonate cover with integrated large OPEN-CLOSED indicator (Optional 2D indicator for L- or T-bores)
- Direct mounting without mounting bracket on actuators according to VDI/VDE 3845: Hole spacing: 80 x 30mm Shaft heights: 20
- Easy and time-saving fastening system
- Enclosure IP66 + IP67 according to DIN EN 60529

- (tested by external test laboratory)
- Cable gland M20x1,5 black (for cable Ø 6-12mm)
  - Sealings TPE and NBR, Screws AISI 304, Stainless steel Shaft AISI 303
  - Application: Standard applications without explosive atmosphere.
  - 1-2 mechanical switches
  - 1-2 proximity sensors in V3 design
  - Atex available on request

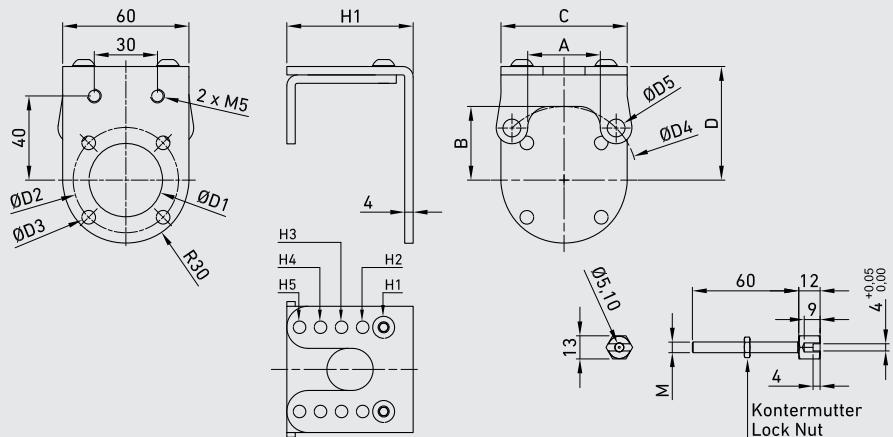


## IP

CODE	BALL VALVES	DN
K07A0018421000H	GE-GPK-G3K/G4K	DN6 DN10 DN13
K07A0018121000H	GE-GPK-G3K/G4K	DN20
K07A0018121000H	GE-GPK	DN25
K07A0019521000H	GB-GPK	DN32 DN40 DN50

QUOTE		K07A0018421000H	K07A0018121000H
A	mm	16	24,36
	inch	0,63	0,96
B	mm	20	15
	inch	0,79	0,59
C	mm	60	60
	inch	2,36	2,36
D	mm	54	54
	inch	2,13	2,13
D1	mm	35,5	35,5
	inch	1,40	1,40
D2	mm	50	50
	inch	1,97	1,97
D3	mm	6,5	6,5
	inch	0,26	0,26
D4	mm	36	50
	inch	1,42	1,97
D5	mm	5,3	6,5
	inch	0,21	0,26
H1	mm	60	60
	inch	2,36	2,36
H2	mm	70	70
	inch	2,76	2,76
H3	mm	80	80
	inch	3,15	3,15
H4	mm	90	90
	inch	3,54	3,54
H5	mm	100	100
	inch	3,94	3,94

## DESCRIPTION

- This mounting kit helps you to add a position feedback in form of a limit switch box to your manual valve. The mounting kit includes the following parts:
- Upper part with F05 flange and hole spacing 80x30mm e.g. for i-box assembly
- Bottom part matching the ISO top flange of the valve (F03-F05)
- Drive screw (M4-M6-M8), length: 60mm
- Lock nut for height fixation
- All parts stainless steel AISI 304 or AISI 303

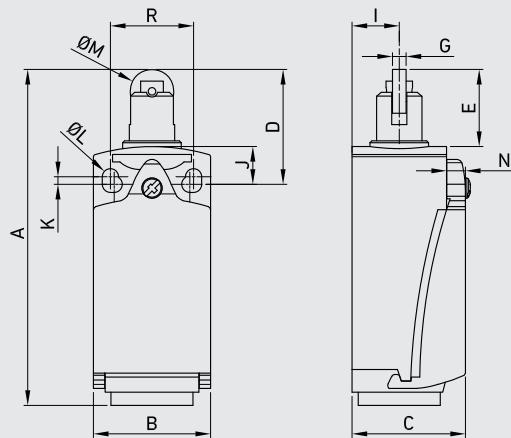


## OSISWITCH METAL

CODE	DESCRIPTION	A	B	C	D	E	F	G	H	J	K	L	M	N	WEIGHT	ITEM CODE
FLSXCKDZCE02HH	AC 15 240V 3A ITH 10A	mm 99,5	31	30	30	20,6	12,5	3	22	9,41	1,91	2	5,8	5	kg 5,2	FAEJ3H140170HH
		inch 3,92	1,22	1,18	1,18	0,81	0,49	0,12	0,87	0,37	0,08	0,08	0,23	0,20	lb 11,46	

### DESCRIPTION

- Ambient air temperature:  
- operation: -25°C to +70°C - storage: -40°C to +70°C
- Vibration resistance: conforming to IEC 60068-2-6
- Shock resistance: conforming to IEC 60068-2-27
- Electric shock protection:
- Class II conforming to IEC 61140 and NF C 20-030 for XCKP and XCKT
- Class I conforming to IEC 61140 and NF C 20-030 for XCKD
- Degree of protection: IP66 and IP67 conforming to IEC 60529; IK4 conforming to EN50102 for XCKP and XCKT, IK06 conforming to EN50102 for XCKD
- Repeat accuracy: 0,1mm on the tripping points, with 1 milion operating cycles for head with end plunger
- Material: metal

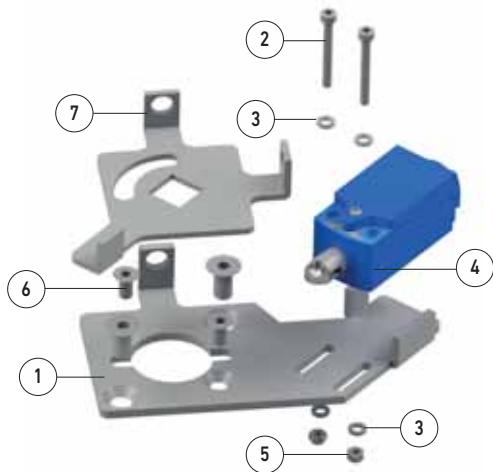

### LIMIT SWITCH OSISWITCH METAL KITS

CODE	BALL VALVES	DN
KOM00LS6EHH	GE - GV	DN6 DN10 DN13
KOM00LS6NHH	GN	DN6 DN10 DN13
KOM00LS20EHH	GE - GV	DN20 DN25
KOM00LS20NHH	GN	DN20 DN25
KOM00LS32BHH	GB - GV	DN32 DN40 DN50
KOM00LS32NHH	GN	DN32 DN40 DN50

POS	DESCRIPTION	Q.TY
1	Lower bracket	1
2	T.C.E.I. screw	2
3	Washer	4
4	Limit switch compact metal	1
5	Stem	2
6	Bonnet	4
7	Cover Plate	1

**UNIVERSAL, XCKD METAL**


- XCKD with 1 cable entry**  
Conforming to CENELEC EN 50047

- XCKD with head for linear movement (plunger)**  
Mounting by the head or by the body

**Environment characteristics**

Conforming to standards	Products Machine assemblies	IEC 60947-5-1, EN 60947-5-1, UL 508, CSA C22-2 n° 14 IEC 60204-1, EN 60204-1
Product certifications		UL, CSA, CCC
Protective treatment	Standard version	"TC"
Ambient air temperature	Operation	-25 ... +70 °C (-13 ... +158 °F)
	Storage	-40 ... +70 °C (-40 ... +158 °F)
Vibration resistance	Conforming to IEC 60068-2-6	25 gn (10 ... 500 Hz) except switch with head ZCE 24: 20 gn
Shock resistance	Conforming to IEC 60068-2-27	50 gn (11 ms) except heads ZCE08: 15 gn (11 ms) and ZCE24: 30 gn (18 ms)
Electric shock protection		Class I conforming to IEC 61140 and NF C 20-030 for <b>XCKD</b>
Degree of protection		IP 66 and IP 67 conforming to IEC 60529; IK 06 conforming to EN 50102 for XCKD
Repeat accuracy		0.1 mm on the tripping points, with 1 million operating cycles for head with end plunger
Cable entry or integral connector	Depending on model	Either: tapped entry for PG 11 or PG 13 conduit thread, tapped ISO M16 x 1.5 or ISO M20 x 1.5, tapped 1/2" NPT, tapped PF 1/2 (G1/2) or integrail M12 connector
Materials		<b>XCKD:</b> Zamak® bodies and heads

## UNIVERSAL, XCKD-COMPLETE UNITS WITH 1/2" NPT CABLE ENTRY


Type of head	Plunger (mounting by the body)	Form C (1)
		
Type of operator	Steel roller plunger	
<b>Catalog Numbers (2) (3)</b>		
13   21 14   22	2-pole N/C + N/O snap action (XE2S P2151)	XCKD2102N12 
<b>Characteristics</b>		
Switch actuation	On end	By 30° cam
Type of actuation		
Maximum actuation speed	0.5 m/s (1.64 ft/s)	
Minimum force or torque	Far tripping For positive opening	15 N (3.37 lb) 45 N (10.12 lb)
	12 N (2.70 lb) 36 N (8.09 lb)	
Cable entry (3)	1 entry tapped M16 x 1.5 mm tor ISO cable entry, clamping capacity 4 to 8 mm (0.16 to 0.31 in.)	

1. Form conforming to EN 50047, contact our customer service.
2. Switches with gold contacts or ring type connections: please consult your local sales office.
3. For any entry tapped for a PG 11 conduit thread, replace N12 in the catalog number G1. Examples: XCKD2110N12 becomes XCXD2110G11, ZCDEN12 becomes ZCDEG11.


## UNIVERSAL, XCKD-COMPLETE UNITS WITH 1/2" NPT CABLE ENTRY

ZCD2• + ZCDEN12 / ZCD3• + ZCDEN12


UNIVERSAL, XCKD

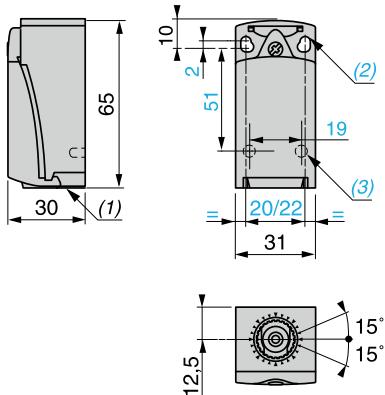

ZCE02

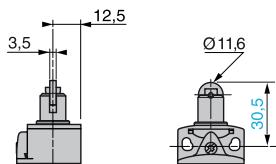

1. Tapped entry for ISO M16 x 1.5 or PG 11 conduit thread.
2. 2 elongated holes Ø 4.3 x 6.3 mm (0.17 x 0.25 in.) on 22 mm (0.87 in.) centers, 2 holes Ø 4.3 mm (0.17 in.) on 20 mm (0.79 in.) centers.
3. 2 x Ø 3 holes for support studs, depth 4 mm (0.16 in.).
4. Mounting nut thickness 3.5 mm (0.14 in.).

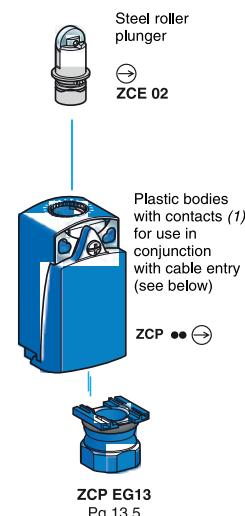

1. For further details, contact our customer service.
2. Cannot be used on bodies: ZCD21, ZCP21, ZCT21, ZCD29, ZCP29, ZCD31, ZCP31, ZCD39, ZCP39, ZCD2•M12, ZCP2•M12







# TEST



One of **GEMELS** main focus is the quality. There is a quality laboratory with different machines, like Climatic Room, Burst Test Machine, Impulse Test Machine, Salt Spray Machine, Tridimentional check and many others. Every day we run several tests on 100% of the pieces of the valves that we produce. **GEMELS** can run also NDT test and other special tests according to customers' requests. In **GEMELS** assembling department we have also test benches. Thanks to our over 50 years' experience, we can help our customers to select the correct suitable solution and product for their application, depending on materials, services and other requirements and needs.

## ■ CHEMICAL RESISTANCE TO FLUIDS

	Materials resistance to fluids		Ball seats - Chemical resistance to fluids				
	Steel	Stainless Steel	PEEK	POM	PTFE	GEMPTFE	PA612
<b>A</b>							
Acetamide 50%	-	-	-	-	A	A	A
Acetic acid conc.	B	A	A	B	A	A	C
Acetic acid 10%	-	-	A	A	A	A	C
Acetic acid 5%	-	-	A	A	A	A	A
Acetic acid ethyl ester	B	A	A	A	A	A	B
Acetone	A	A	-	-	-	-	-
Acetylene (ethin)	A	A	A	A	A	A	B
Air	A	A	A	A	A	A	B
Ammonium chloride	C	A	B	B	A	A	B
Ammonia 10%	A	A	A	A	A	A	A
Amyl Alcohol	-	A	B	-	A	A	-
Aniline	B	A	A	A	A	A	B
Argon, gaseous	A	A	A	A	A	A	A
ATE brake fluid	A	A	A	A	A	A	A
<b>B</b>							
Beer	-	A	B	A	A	A	-
Beet sugar juice	B	A	A	A	A	A	A
Benzene	A	A	A	A	A	A	B
Benzine, leaded	A	A	A	A	A	A	A
Bitumen	A	A	-	A	A	A	B
Borax	B	B	A	A	A	A	A
Boric acid 10%	-	B	A	A	A	A	A
Brine	B	A	A	A	A	A	A
Bromine	-	A	B	-	A	A	-
Butane	A	A	A	A	A	A	A
Butylacetate	-	-	-	A	A	A	A
Butylene glycol	-	-	A	-	-	-	-
<b>C</b>							
Calcium chloride 10%	-	B	A	A	A	A	A
Carbon dioxide, dry	A	A	A	-	A	A	-
Carbon dioxide, wet	A	A	A	-	A	A	A
Carbon disulphide	-	-	A	-	A	A	-
Carbonlineum	-	-	A	-	A	A	-
Carbon tetrachloride	-	-	A	A	A	A	A
Chlorine 100°C	B	B	B	-	A	A	-
Chlorine water	-	A	B	-	A	A	-
Chlorobenzene	-	-	A	-	B	B	-
Chloroform	B	A	-	C	A	A	B
Chromic acid	-	B	B	-	A	A	-
Citric acid 10%	C	B	A	A	A	A	B
Clophen A 80 50%	-	-	-	A	A	A	A
Coconut oil	-	B	A	-	A	A	B
Coffee	-	B	A	-	A	A	-
Copper sulphate	-	-	-	-	A	A	A
Cyclohexane	-	-	A	A	A	A	A
Cycloexanol	B	A	-	A	A	A	B
Cycloexanone	-	-	-	-	-	-	-

	Materials resistance to fluids			Ball seats - Chemical resistance to fluids			
	Steel	Stainless Steel	PEEK	POM	PTFE	GEMPTFE	PA612
<b>D</b>							
Diacetone alcohol	-	A	B	-	A	A	-
Diesel oil	A	A	A	A	A	A	B
Dichlorbenzene	-	A	B	-	A	A	B
Diethylene glycol	B	A	A	A	A	A	-
Dimethylformamide	-	-	A	A	C	C	C
Dimethyl Ketone (acetone)	B	A	A	-	A	A	-
Diocetylphthalate	-	-	-	A	A	A	A
Dioxan	-	-	A	B	A	A	A
<b>E</b>							
Edible oil, Edible fat	-	-	A	-	A	A	A
Ethanol	B	A	-	-	A	A	B
Ethane	B	B	-	A	A	A	A
Ethanol 96%	B	A	A	A	A	A	A
Ether	A	A	-	B	A	A	-
Ethyl Acetate	B	B	A	B	A	A	B
Ethyl alcohol	B	A	A	A	A	A	B
Ethyl benzene	A	A	A	A	A	A	B
Ethylene	B	A	A	A	A	A	B
Ethylene glycole	B	A	A	B	A	A	B
Ethylene trichloride (Tri)	B	A	A	B	A	A	B
Ethylene Chloride	-	-	B	C	A	A	B
<b>F</b>							
Fatty acids 100°C	C	A	A	A	A	A	-
Fatty acids 200°C	C	A	B	-	A	A	-
Ferric chloride	C	A	B	-	A	A	A
Flue gas	B	A	A	A	A	A	A
Formaldehyde 30%	C	A	A	A	A	A	A
Formamide	-	-	-	-	A	A	A
Formic acid 10%	C	B	A	A	A	A	C
Freon 11,13,14,32	B	A	B	-	A	A	B
Freon 22,31,114,115	B	A	B	-	A	A	B
Frigen	-	-	C	-	-	-	-
Fruit juices	C	A	A	-	A	A	A
Fuel oil	B	A	A	-	A	A	B
<b>G</b>							
Gasoline	A	A	A	A	A	A	A
Gelatine	-	A	A	A	A	A	A
Glucose	B	A	A	A	A	A	B
Glycerine	B	A	A	A	A	A	A
Glycol	B	A	A	A	A	A	B
Glycol acids	-	A	A	-	A	A	-
Gly santin 40%	-	-	A	A	A	A	A
Grease	A	A	A	A	A	A	A

## ■ CHEMICAL RESISTANCE TO FLUIDS

	Materials resistance to fluids		Ball seats - Chemical resistance to fluids				
	Steel	Stainless Steel	PEEK	POM	PTFE	GEMPTFE	PA612
<b>H</b>							
Helium, gaseous	A	A	A	A	A	A	A
Heptane	B	A	A	A	A	A	A
Hexane	B	B	A	A	A	A	A
Hydrochloric acid 36%	-	-	A	-	A	A	-
Hydrochloric acid 2%	-	A	A	-	A	A	-
Hydrofluoric acid	-	-	C	-	A	A	-
Hydrogen peroxide 30%	C	B	B	C	A	A	C
Hydrogen peroxide 0,5%	-	-	A	A	A	A	C
Hydrogen sulphide	-	-	A	-	A	A	-
<b>I</b>							
Ink	C	A	A	A	A	A	
Isobutylalcohol	B	B	B	-	A	A	-
Isocyanat	A	A	A	A	A	A	B
Isooctane	A	A	A	-	A	A	B
Isopropanol	-	-	A	A	A	A	A
Isopropylalcohol	B	B	B	B	A	A	B
<b>K</b>							
Kerosene	B	A	A	B	A	A	B
<b>L</b>							
Lactic acid 90%	-	-	A	A	A	A	C
Lactic acid 10%	-	-	A	A	A	A	A
Linseed oil	A	B	A	A	A	A	A
<b>M</b>							
Magnesium chloride	B	B	A	A	A	A	B
Margarine	-	A	A	A	A	A	A
Menthol	-	B	A	-	A	A	-
Mercury	A	A	A	A	A	A	A
Mercury dichloride	-	B	B	-	A	A	A
Mercury monochloride	-	B	B	-	A	A	-
Methane	A	A	A	A	A	A	A
Methanol	B	A	A	A	A	A	A
Methyl ethyl ketone	-	-	A	B	A	A	A
Methylene chloride	B	A	A	B	A	A	C
Milk	-	A	A	A	A	A	
Motor oil/Engine oil	-	-	A	A	-	-	-
<b>N</b>							
Naphta (stone-oil)	B	A	A	A	A	A	A
Naphthalene	B	B	A	A	A	A	A
Neon, gaseous	A	A	A	A	A	A	A
Nitric acid 2%	B	B	A	C	A	A	C
Nitrobenzene	B	A	A	-	A	A	B

	Materials resistance to fluids		Ball seats - Chemical resistance to fluids				
	Steel	Stainless Steel	PEEK	POM	PTFE	GEMPTFE	PA612
<b>O</b>							
Octane	-	A	A	A	A	A	A
Oleic acid 100°C	B	A	A	A	A	A	A
Oleic acid 200°C	-	A	B	-	A	A	-
Olive oil	A	A	A	A	A	A	A
Oxygen, gaseous 60°C	B	A	A	A	A	A	-
Oxalic acid 10%	-	-	A	C	A	A	B
Ozone	B	A	A	C	A	A	B
<b>P</b>							
Paraffin oil	-	A	A	A	A	A	B
Pectin	-	A	B	-	A	A	-
Perchloroethylene	A	A	A	A	A	A	B
Petroleum white spirit	A	A	A	-	A	A	C
Phenol, aqueous	-	A	A	C	A	A	C
Phosphoric acid 10%	-	A	A	B	A	A	C
Potassium carbonate	-	A	A	-	A	A	-
Potassium hydroxide solution 50%	-	-	A	A	A	A	A
Potassium hydroxide solution 10%	-	-	A	A	A	A	A
Potassium dichromate 10%	-	-	A	A	A	A	A
Potassium permanganate 1%	-	-	A	A	A	A	C
Potassium sulphate	B	B	B	A	A	A	A
Propane	B	A	A	A	A	A	B
Propanol	-	-	A	A	-	-	-
Propylene	A	A	A	A	A	A	A
Pyridene	-	-	-	A	A	A	A
P-3 Solution aqueous	-	-	-	-	A	-	-
<b>S</b>							
Salicylic acid			-	-	A	A	A
Sea water	-	A	A	A	A	A	-
Silicone oil	A	A	A	A	A	A	A
Soap solution	-	-	A	A	A	A	A
Soda solution 10%	-	-	A	-	-	-	-
Sodium bisulphite	-	-	A	C	A	A	-
Sodium carbonate 10%	-	A	A	A	A	A	A
Sodium Chloride 10%	B	B	A	A	A	A	A
Sodium Hydroxide solution 50%	B	B	A	-	A	A	C
Sodium Hydroxide solution 10%	B	A	A	-	A	A	B
Sodium nitrate 10%	B	A	-	A	A	A	A
Sodium thiosulphate	B	A	-	A	A	A	A
Solvent	A	A	A	B	A	A	B
Soybean-oil	A	A	A	A	A	A	A
Steam 150°C	B	A	A	-	A	A	-
Styrene	-	-	A	-	A	A	-
Sulphuric acid 98%	B	B	C	C	A	A	-
Sulphuric acid 2%	B	A	A	A	A	A	-

## ■ CHEMICAL RESISTANCE TO FLUIDS

	Materials resistance to fluids		Ball seats - Chemical resistance to fluids				
	Steel	Stainless Steel	PEEK	POM	PTFE	GEMPTFE	PA612
<b>T</b>							
Tar	A	A	A	-	A	A	B
Tartaric acid	-	-	A	B	A	A	A
Tetrahydrofuran	-	-	-	B	A	A	A
Tetrahydronaphthalene	-	-	B	-	-	-	-
Thermo-oil 200°C	A	A	A	-	A	A	-
Thermo-oil 250°C	A	A	A	-	-	-	-
Tincture of iodine	-	-	A	-	A	A	C
Toluene	A	A	-	-	A	A	B
Triethanolamine	-	-	-	A	-	-	-
Trichloroethylene	A	A	A	C	A	A	B
Trilon B 10%	-	-	-	-	A	A	A
Turpentine	B	A	A	A	A	A	A
<b>U</b>							
Urea aqueous	-	B	A	A	A	A	B
<b>V</b>							
Vaseline	B	A	A	A	A	A	A
Vegetable oil	-	A	A	B	A	A	B
Vinegar ( 5...10% feed vinegar)	C	A	A	A	A	A	B
Vinyl chloride	B	B	B	B	A	A	B
<b>W</b>							
Water, cold	A	A	A	A	A	A	A
Water, distilled	A	A	A	A	A	A	B
Water, hot	A	A	A	B	A	A	B
Wax, molten	A	A	A	A	A	A	A
Wine, brandy	C	A	A	A	A	A	A
<b>X</b>							
Xylene	B	A	A	A	A	A	B
<b>Z</b>							
Zinc chloride 10%	C	B	A	A	A	A	B

**LEGEND**

- A** Resistant
- B** Limited resistance
- C** Not resistant
- Data not available

All the data refer to a temperature of 20°C and are not binding. These data represent the state of the art of our knowledge, and have the scope of giving information on our products and their possible applications. These data have not a legally binding guarantee regarding the chemical resistance and the suitability for a specific application. Standard tests are done in a standard conditioned atmosphere 23/50 as stated in DIN 50014. For any specific applications we recommend a practical test for the suitability.

## BALL SEATS - MAIN MATERIALS & SPECIFICATIONS



### PA612 (Polyamide):

Polyamides are well proven engineering polymers with very interesting properties and a favourable price. They are characterized by high mechanical stability values combined with excellent impact strength. They have an above average wear rate. The different types of polyamides are distinguished by an international identification system based on the number of carbon atoms per monomer.



### PTFE (Polytetrafluoroethylene):

Above the melting point of +327°C, PTFE changes into a gellike state. Its high viscosity excludes the possibility of thermoplastic processing by traditional methods, such as injection moulding and screw extrusion. PTFE is cold extruded and subsequently sintered. Due to its unique combination of outstanding characteristics, PTFE can be called an engineered polymer of outstanding quality.



### PEEK (Polyether etherketone):

Semi-finished products are based on polyether etherketone as the raw material, a linear, aromatic polymer. It is an ideal material for applications where high performance is demanded under extreme conditions with regard to temperature, chemicals, high powered radiation and non-flammable, etc.



### GEMPTFE and RPTFE:

GEMPTFE and RPTFE seals are made with the same procedure of PTFE, but the solution is provided by using special fillers: 25% of glass blue pigment for GEMPTFE and 25% carbongraphite for RPTFE that creates a major mechanical resistance.



### POM (Polyoxymethylene):

A highly crystalline thermoplastic with special importance as a technical plastic. POM combines a high level of hardness and form stability with a high resistance to impact. Accordingly, it's a highly suitable for the construction of precision machinery and apparatus. It has remarkable sliding properties.

### Maximum and minimum admissible working temperatures for seals ball

	-250°	-200°	-150°	-100°	-50°	-40°	-30°	-20°	-10°	+50°	+100°	+150°	+200°	+250°	+300°	+350°	+400°
POM							30°										
PTFE		200°														260°	
PEEK							50°									250°	
PA612						45°							145°				
GEMPTFE	220°													230°			
Metal to metal		200°															400°
										0°							

## ■ BALL SEATS PHYSICAL PROPERTIES OF PLASTIC MATERIAL FOR TECHNICAL USE

Properties		Test method	Unit	PA	PEEK	POM	PTFE	GEMPTFE
Specific gravity		DIN 53479	g/cm <sup>3</sup>	1,14	1,31	1,41	2,18	2,19
Water absorption		Standard climate at +23°C/50% U.R.	%	2,6	0,2	0,2	<0,01	<0,01
		in water at +23° C	%	9	0,45	0,85	<0,01	<0,01
Tensile strength Os	tr	DIN 53455	N/mm <sup>2</sup>	76	110	68	~30	~31
	lf	DIN 53455	N/mm <sup>2</sup>	45		68		
Tensile ultimate elongation ER	tr	DIN 53455	%	>50	20	35	350	350
	lf	DIN 53455	%	>100		35		
Tensile modulus of elasticity	tr	DIN 53457	N/mm <sup>2</sup>	3250	4400	3100	550	550
	lf	DIN 53457	N/mm <sup>2</sup>	1400		3100		
Admissible compression load /with E 2%)( E 1% for rptfe)	lf	DIN 53444 (ASTM D 695)	N/mm <sup>2</sup>	15	57	26	5	5
Deformation under load		ASTM D 621					15	15
Permanent deformation		ASTM D 622					8,1	8,2
Shock proof resistance	Charpy	tr	DIN 53453	kJ/m <sup>2</sup>	5,5	3,5	7	16
	Izod	lf	DIN 53453	kJ/m <sup>2</sup>	15		7	
Brine/l hardness /3)	tr	ISO 2039-1	N/mm <sup>2</sup>	150	230	140	27	27
Hardness		ASTM D 2240					55	55
Rockwell Hardness (4)	lf	ISO2039-2		M85	M105	M84		
Transversal resistivity /5)	tr	DIN 53481/0303 T2	kV/mm	25	24	20	1018	1018
	lf		kV/mm	16		20		
Surface resistivity	tr	DIN 53482/0303 T3	Ω*cm	>1014	1016	>1014	1017	1017
	lf		Ω*cm	>1014		>1013		
Surface resistivity	tr	DIN 53482/0303 T3	Ω	>1013	1016	>1013		
	lf		Ω	>1012		>1013		
Dielectric constant E	100Hz	lf	DIN 53483/0303 T4		3,9	3,2	3,8	2,1
		lf			7,4		3,8	
	1MHz	tr	DIN 53483/0303 T4		3,3	3,2	3,8	2,1
		lf			3,8		3,8	
Dielectric loss factor tan&	100Hz	tr	DIN 53483/0303 T4		0,019	0,001	0,003	<0,0003
		lf			0,13		0,003	
	1MHz	tr	DIN 53483/0303 T4		0,021	0,002	0,008	<0,0003
		lf			0,06		0,008	
Leakage current resistance tr+lf		tr+lf	IEC 112/0303 Tl	CTI	600	150	600	600
Melting point			DIN 53736	°C	220	340	165	327
Thermal conductivity			DIN 52612	W/(K·m)	0,28	0,25	0,31	0,23
Linear thermal expansion coefficient	+23°C a +60°C		DIN 52328	1/K·10 <sup>-6</sup>	90	50	110	160
	+60°C a +100°C			1/K·10 <sup>-6</sup>	105	50	125	180
Deflection temperature under load /HOT)			DIN 53461	°c	70	160	105	
Working temperature /HOT)	for cont. service			°c	85	250	115	+260
	for short period			°c	160	310	140	+280
Low temperature resistance				°c	-40	-60	-50	-200
Flame resistance	oxygen index	ASTM 4589	%	25	35	15	95	95
		UL 94	classe	HB	V-0	HB		
Friction coefficient μ		dynamic		0,40-	0,25-	0,30-		
				0,60	0,50	0,45		
Static friction coefficient							0,05-	0,05-
							0,10	0,11
Dynamic friction coefficient		ASTM D 3702					0,06-	0,06-
							0,08	0,09
Wear rate		ASTM D 3702	μm/km	19	28	45		

## BALL SEATS CHEMICAL RESISTANCE

Material	Abbreviation	Remarks	Maximum Admissible constant	Temp.(Water)°C Short Term
Polyvinylidene Fluoride	PVDF	Resistant to acids, solution of salts, aliphatic, aromatic and chlorinated hydrocarbons, alcohols and halogens. Conditionally suitable for ketones, esters, organic bases and alkaline solutions.	140°	150°
Polyoxymethylene	POM	Resistant to most solvents and hydrous alkalis. Unsuitable for acids.	100°	140°
Polytetrafluoroethylene	PTFE	Resistant to all chemicals in the list.	250°	300°
Nitrile Rubber	NBR	Good resistance to oil and petrol. Unsuitable for materials subject to oxidation.	90°	120°
Butyl Rubber	EPDM	Good resistance to ozone and weather.	90°	120°
Ethylene Propylene Rubber		Especially suitable for gressive chemicals. Unsuitable for oils and fats.		
Fluorine Rubber	FPM	It has been chemical resistance to solvent of all elastomers.	150°	200°
Polytetrafluoroethylene Special Gemels seals	GEMPTFE	Resistant to all chemicals in the list, possibility use also high pressure.	250°	300°

## ■ SEATS MAXIMUM PRESSURE



SEATS PA612	
O-RING NBR (GB)	
DN6	PN500
DN10	PN500
DN13	PN500
DN20	PN400
DN25	PN350
DN32-40-50	PN500



SEATS POM	
O-RING NBR (AB)	
DN6	PN500
DN10	PN500
DN13	PN500
DN20	PN400
DN25	PN350
DN32-40-50	PN500



SEATS PTFE	
O-RING NBR (GB) DVGW	
DN6	PN100
DN10	PN100
DN13	PN100
DN20	PN100
DN25	PN100



SEATS PEEK	
O-RING NBR (DB)	
DN6	PN500
DN10	PN500
DN13	PN500
DN20	PN400
DN25	PN350
DN32	PN350
DN40	PN350
DN50	PN350






SEATS PTFE	
O-RING NBR (CB)	
DN6	PN350
DN10	PN350
DN13	PN350
DN20	PN175
DN25	PN150
DN32	PN100
DN40	PN100
DN50	PN100



SEATS GEMPTFE	
O-RING NBR (KB)	
DN6	PN350
DN10	PN350
DN13	PN350
DN20	PN175
DN25	PN150
DN32	PN100
DN40	PN100
DN50	PN100

## ■ PRESSURE-TEMPERATURE CHART

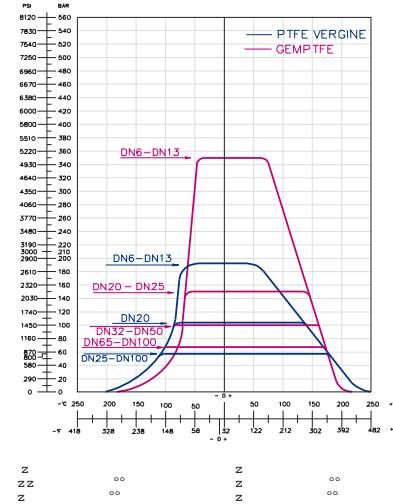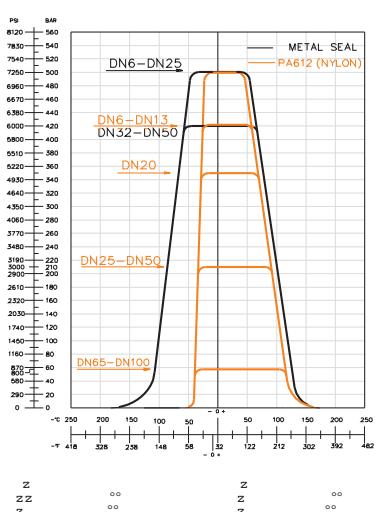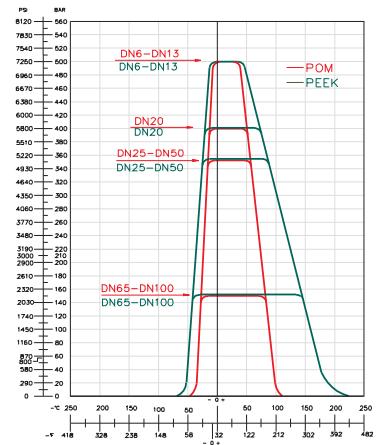

### NOTES

The values reported in the chart are just guidelines and should not be taken as compulsory. Every valve should be associated with the pressure/temperature rating in accordance with the dimension of the bore, the body material, the ball and the stem. Carbon steel valves are suitable for low temperature until -20°C while the stainless steel ones (316L) are suitable until -40°C. For any other use of the valves below these temperatures we suggest to employ a different material.

## O-RINGS RESISTANCE TO FLUIDS

	O-rings resistance to fluids						O-rings resistance to fluids				
	NBR	FKM	MVQ	EPDM	FFKM		NBR	FKM	MVQ	EPDM	FFKM
<b>A</b>											
Acetaldehyde	C	D	B	B	A1		Amyl alcohol	D	D	D	A
Acetamide	A	C	B	A	A1		Amyl borate	B	B	D	A
Acetate of copper	B	D	D	A	A		Amyl chloride	A	A	—	D
Acetate of copper hot	D	D	C	C	A		Amyl chloronaphthalene	D	A	D	D
Acetic anhydride	D	D	B	B	A		Aniline (aniline oil)	D	A	D	D
Acetoacetic ester	D	D	B	B	A		Aniline dyes	D	C	D	B
Acetone	D	D	D	A	A		Aniline hydrochloride	D	B	C	B
Acetophenone	D	D	D	A	A		Animal fat	A	A	B	B
Acetyl chloride	D	A	C	D	A		Aqua regia	D	B	D	C
Acetylacetone	D	D	D	A	A		Argon	B	B	C	B
Acetylene, Ethene	A	A	B	A	A		Arsenic acid (arsenic trichloride)	A	D	D	D
Acrylic acid ethyl ester	D	D	B	B	A1		Asphalt	A	A	A	A
Acrylonitrile	D	C	D	D	A1		ASTM-oil No°.1	B	A	D	D
Aero Shell 7A	A	A	B	D	A		ASTM-oil No°.2	A	A	A	D
Aero Shell 17	A	A	B	D	A		ASTM-oil No°.3	A	A	D	D
Aero Shell 750	B	A	D	D	A		ASTM-oil No°.4	A	A	C	D
Aero Shell Fluid 4	A	A	D	D	A		ASTM-reference fuel A	B	A	D	D
Aerosafe 2300	D	D	C	A	—		ASTM-reference fuel B	A	A	D	D
Aerosafe 2300 W	D	D	C	A	—		ASTM-reference fuel C	A	A	D	D
Air	A	A	A	A	A		ATF-oil	B	A	D	D
Air oil-free 100°C	A	A	A	A	A						
Air oil-free 150°C	B	A	A	B	A	<b>B</b>	Barium chloride	A	A	A	A
Air oil-free 200°C	D	A	A	D	A		Barium hydroxide	A	A	A	A
Alkazene®	D	B	D	D	A		Barium sulphide	A	A	A	A
Aluminium acetate	B	D	D	A	A		Beer	A	A	A	A
Aluminium bromide	A	A	A	A	A		Benzaldehyde	D	D	D	A
Aluminium chloride	A	A	B	A	A		Benzene	D	A	D	D
Aluminium fluoride	A	A	B	A	A		Benzene-sulphonic acid 10%	D	A	D	D
Aluminium nitrate	A	A	B	A	A		Benzoic acid	D	A	D	B
Aluminium phosphate	A	A	A	A	A		Benzoic benzyl ester	D	A	—	D
Aluminium sulphate	A	A	A	A	A		Benzoic methyl ester	D	A	D	D
Alums	A	A	B	A	A		Benzophenone	—	A	—	B
Ammonia gas (cold)	A	D	A	A	A1		Benzoyl chloride	D	A	—	A
Ammonia gas (hot)	D	D	B	A	A1		Benzyl alcohol	D	A	B	B
Ammonia gas gas liquid (anhydrous)	B	D	B	A	A1		Benzyl chloride	D	A	D	D
Ammonium carbonate	C	B	D	A	A		Black liquor	B	A	B	B
Ammonium Chloride	A	A	B	A	A		Blast furnace gas	D	A	A	D
Ammonium Chloride 3 molar solution	A	B	A	A	A		Beaching lye	D	A	B	A
Ammonium hydroxide concentrated	D	C	A	A	A1		Borax	B	A	B	A
Ammonium nitrate	A	B	B	A	A		Bordeaux mixture	B	A	B	A
Ammonium nitrite	A	—	B	A	A		Boric acid	A	A	A	A
Ammonium persulphate	D	—	—	A	A		Boron liquid (HEF)	B	A	D	D
Ammonium persulphate solution	D	—	—	A	A		Bromine	D	A	D	D
Ammonium phosphate	D	—	—	A	A		Bromine water	D	A	D	D
Ammonium phosphate	A	B	B	A	A		Bromobenzol	D	A	D	D
Ammonium phosphate primary	A	B	B	A	A		Bromochloromethane	D	A	D	B
Ammonium phosphate secondary	A	B	B	A	A		Bromochlorotrifluoroethan	D	A	D	D
Ammonium phosphate tertiary	A	B	B	A	A		Bromopentafluoride	D	D	D	B
Ammonium sulphate	A	C	A	A	A		Bromotrifluoride	D	D	D	B
Ammonium sulphide	A	D	B	A	A		Butadine (monomer)	D	A	D	D
Amyl acetate	A	D	B	A	A		Butan-2-one (methyl ethyl ketone, MEK)	D	D	D	A

## O-RINGS RESISTANCE TO FLUIDS

	O-rings resistance to fluids				
	NBR	FKM	MVQ	EPDM	FFKM
Butane	A	A	D	D	A
Butanol (butyl alcohol)	A	A	B	B	A
Butene	B	A	D	D	A
Butter	A	A	B	A	A
Butyl acetate	D	D	D	B	A
Butyl acetylricinoleate	B	A	—	A	B
Butyl acrylate	D	D	D	D	A1
Butyl alcohol	A	A	B	B	A
Butyl butyrate	D	A	—	A	A
Butyl carbitol	D	C	D	A	A
Butyl catechol	D	A	—	B	A
Butyl cellosolve	D	D	D	B	A
Butyl glycol	C	D	B	B	A
Butyl glycoladipate	D	B	B	B	A
Butyl mercaptan	D	A	D	D	A
Butyl oleate	D	A	—	D	A
Butyl stearate	B	A	B	D	A
Butyl n-Butyl ether	C	D	D	C	A
Butylamine, n-Butylamine	C	D	B	D	A1
Butyraldehyde	D	D	D	B	A1
Butyric acid	D	B	D	B	A
<b>C</b>					
Calcium acetate	B	D	D	A	A
Calcium bisulphite	A	A	A	D	A
Calcium chloride	A	A	A	A	A
Calcium cyanide	A	—	A	A	A
Calcium hydroxide	A	A	B	A	A
Calcium hypochloride	B	A	B	A	A
Calcium lysulphide	A	A	A	A	A
Calcium nitrate (nitrate of lime)	A	A	B	A	A
Calcium silicate	A	A	—	A	A
Calcium sulphite	A	A	A	A	A
Calcium thiosulphate	B	A	A	A	A
Caliche solution (chile saltpetre)	A	A	B	A	A
Caproic aldehyde (Hexanal)	—	D	B	B	A1
Carbamates Carbitol/Diethylene	D	A	—	B	A
glycol monoethyl ether	B	B	B	B	A
Carbolic acid (phenol)	A	A	D	D	A
Carbon dioxide dry	A	B	B	B	A
Carbon dioxide moist	A	B	B	B	A
Carbon disulphide	D	A	D	D	A
Carbon monoxide	A	A	A	A	A
Carbon tetrachloride	B	A	D	D	B
Carbonic acid	B	A	A	A	A
Castor oil	A	A	A	B	A
Cellosolve (Ethylene glycol ethyl ether)	D	D	D	B	A
Cellosolve acetate	D	D	D	B	A
Cetane (Hexadecane)	A	A	D	D	A
Chloroacetone	D	D	D	A	A
Chlorax	B	A	—	B	A
Chlordane	B	A	D	D	A

	O-rings resistance to fluids				
	NBR	FKM	MVQ	EPDM	FFKM
Chlordecan	D	A	D	D	A
Chloracetic acid	D	D	D	B	A
Chlorestol	B	A	D	D	A
Chlorinated carbonic acid ethyl ester	D	A	D	D	A
Chlorine dioxide	D	A	D	C	A
8% Cl as CaClO in solution	D	A	D	D	A
Chlorine dry	D	B	D	D	A
Chlorine moist	C	A	—	B	B
Chlorine napthaline	D	A	D	D	A
Chlorine trifluoride	D	D	D	D	B
Chlorine 1-chlorine-nitroethane	D	D	D	D	A
Chloroacetic acid	D	A	D	D	A
Chlorobenzene (monochlorobenzene)	D	A	D	D	A
Chloroform (Trichloromethane)	D	A	D	D	A
Chloroprene	D	A	D	D	A
Chlorosulphonic acid	D	D	D	D	A
Chlortoluene	D	A	D	D	A
Chrome bath electrolyte	D	A	B	B	A
Chrome alum	A	A	A	A	A
Citric acid	A	A	A	A	A
Citric acid 2n	A	A	A	A	A
Coconut oil	A	A	A	C	A
Cod liver oil	A	A	B	A	A
Coffee	A	A	A	A	A
Colamine (ethanolamine)	D	D	B	B	A1
Coliche-solution	B	—	—	B	—
Compressed air supply (oil-free)	A	A	A	A	A
Coolanol (Monsanto), Silicone oil	A	A	D	D	A
Copper chloride	A	A	A	A	A
Copper cyanide	A	A	A	A	A
Cotton seed oil	A	A	A	C	A
Creosote, carbolineum	A	A	D	D	A
Cresilic acid	D	A	D	D	—
Crude oil	B	A	D	D	A
Crumene (isopropylbenzene)	D	A	D	D	A
Cyclohexane	A	A	D	D	A
Cyclohexanol	A	A	D	D	A
Cyclohexanon	D	D	D	B	A
<b>D</b>					
Decane	A	A	B	D	A
Delco brake fluid	C	D	C	A	A
Denaturated alcohol	A	A	A	A	A
Detergent dissolved in water	A	A	A	A	A
Developer (photo)	A	A	A	B	A
Diacetone alcohol	D	D	D	A	A
Diazinone (insecticide)	C	B	D	D	—
Dibenzyl ether	D	D	D	B	A
Dibenzyl sebacate	D	B	C	B	A
Dibromethyl benzol	D	A	D	D	A
Dibromodifluoromethane	D	—	D	B	B
Dibutyl amine	D	D	C	D	A1

	O-rings resistance to fluids					O-rings resistance to fluids				
	NBR	FKM	MVQ	EPDM	FFKM	NBR	FKM	MVQ	EPDM	FFKM
Dibutyl ether	D	C	D	C	A	Ethyl benzoate	D	A	D	D
Dibutyl phthalate	D	C	C	B	A	Ethyl bromide	B	A	D	D
Dibutyl sebacate	D	B	B	B	A	Ethyl chloride	A	A	D	A
Dichlorobutane (Tetramethylene chloride)	B	A	D	D	A	Ethyl cyclopentane	A	A	D	D
Dichloroisopropylether	D	C	D	C	A	Ethyl dichloride	D	B	D	D
Dichloromethane (Methylene chloride)	D	B	D	D	A	Ethyl ether	C	D	D	C
Dicyclohexylamine	C	D	D	D	A1	Ethyl oxalate	D	A	D	A
Diesel fuel	A	A	D	D	A	Ethyl pentachloro-benzene	D	A	D	D
Diethyl ether	D	D	D	D	A	Ethyl silicate	A	A	B	A
Diethyl sebacate	D	B	B	B	A	Ethylbenzene	D	A	D	A
Diethylamine	B	D	B	B	A1	Ethylcellulose	B	D	B	B
Dyethilene	A	A	B	A	A	Ethylene chlorhydrin	D	A	C	B
Diisobutylene	B	A	D	D	A	Ethylene dibromide	D	A	D	C
Diisooctyl sebacate	C	B	C	C	A	Ethylene dichloride	D	A	D	C
Diisopropyl ketone 3-molar	D	D	D	A	A	Ethylene glycol (glycol)	A	A	A	A
Diisopropyl ketone concentrated	D	A	D	D	A	Ethylene oxide	D	D	D	C
Diisopropyl ketone red,fuming	D	B	D	D	B	Ethylene oxide (12%) and Freon (80%)	C	D	D	B
Dimenthyl formamide (DMF)	C	D	B	B	A	Ethylene trichloride ("Tri")	D	A	D	D
2,2-Dimethylbutane	A	A	D	D	A	Ethylene 2-ethyl-1-hexanol (isoctanol)	A	A	B	A
2,3-Dimethylbutane	A	A	D	D	A	Ethylnedimine	A	D	A	A1
Dimethylether (Methylether)	A	A	A	A	A					
Dimethyldiazine	B	D	D	A	A	<b>F</b>				
2,4-Dimethylpentane	A	A	D	D	A	Fatty acids	B	A	B	C
Dimethylphthalate	D	B	–	B	A	Fluorolub	A	B	A	–
Dinitrogen monoxide (laughing gas)	A	A	A	B	A	Formaldehyde	C	D	B	B
Dinitrotoluene	D	D	D	D	A	Formic acid methylester	D	D	–	B
Diocyl phthalate (DOP)	D	B	C	B	A	Freon 11	A	A	D	A
Diocyl sebacate (DOS)	D	B	C	B	A	Freon 12	A	A	D	A
Dioxan	D	D	D	B	A	Freon 12 and ASTM oil no. 2 (50:50 mix)	A	A	D	A
Dioxolan	D	D	D	B	A	Freon 12 and Suniso 4g (50:50 mix)	D	D	D	A
Dipentene (paint solvent)	B	A	D	D	A	Freon 13	D	D	D	A
Diphenyl (biphenyl)	D	A	D	D	A	Freon 1381	A	A	D	A
Diphenyl ether	D	A	C	D	A	Freon 14	A	A	D	A
Dowtherm A thermal oil	D	A	D	D	A	Freon 21	D	D	D	D
Dowtherm E thermal oil	D	A	D	D	A	Freon 22	D	D	D	A
Drilling oil	A	A	D	D	A	Freon 22 and ASTM oil no. 2 (50:50 mix)	D	B	D	D
Dye solvent	D	B	D	D	A	Freon 31	D	D	D	A
<b>E</b>						Freon 32	A	D	D	A
Electroplating solution chrome	D	A	B	B	A	Freon 112	B	A	D	D
Electroplating solution chrome other metals	–	A	D	A	A	Freon 113	A	B	D	D
Epichlorhydrin	D	D	D	B	A	Freon 114	A	A	D	A
Epoxy resins	–	D	–	A	A	Freon 114 B2	B	B	D	D
Ethan	A	A	D	D	A	Freon 115	A	A	D	A
Ethane	A	A	B	B	A	Freon 502	B	B	A	A
Ethane thiol	D	B	C	D	A	Freon BF	B	A	D	D
Ethanol (ethyl alcohol)	A	C	A	A	A	Freon C 318	A	B	D	A
Ethanolamine (Colamine)	B	D	B	B	A1	Freon K-142b	A	D	–	A
Ether (various)	D	C	D	C	A	Freon K-152a	A	D	–	A
Ethyl acetate	D	D	B	B	A	Freon MF	B	B	D	D
Ethyl acrylic acid	D	–	D	B	A1	Freon PCA	A	B	D	D
Ethyl alcohol (ethanol)	A	C	A	A	A	Freon TF	A	B	D	D
						Fuel oil	A	A	D	D

## O-RINGS RESISTANCE TO FLUIDS

	O-rings resistance to fluids				
	NBR	FKM	MVQ	EPDM	FFKM
Fumaric acid	A	B	D	D	A
Fural (2-furaldehyde)	D	D	D	B	A1
Furan	D	D	D	D	A
Furfur alcohol	D	D	D	B	A
Furyl carbinol	D	-	D	B	-
<b>G</b>					
Gallic acid	B	A	A	B	A
Gallotannic acid	A	A	B	A	A
Gallotannic tannin 10%	A	A	B	A	A
Gear oil type A	A	A	B	D	A
Gelatines	A	A	A	A	A
Generator gas	A	A	B	D	A
Girling brake fluid	C	D	-	A	A
Glacial acetic acid (100% acetic acid)	B	D	B	B	A
Glauber salt (sodium sulphate)	D	A	A	B	A
Glucose	A	A	A	A	A
Glycerine	A	A	A	A	A
Glycerine triacetate	B	D	B	A	A
Glycol (ethylene glycol)	A	A	A	A	A
Green liquor	B	A	-	A	A
Groundnut oil	A	A	A	C	A
<b>H</b>					
Halon 1301	A	A	D	A	B
Halothane (narcotic)	D	A	D	D	A
Halowax oil	D	A	D	D	A
Heavy water	A	A	A	A	A
Helium	A	A	A	A	A
n-heptane	A	A	D	D	A
n-hexaldehyde	D	D	B	A	A1
n-hexane	A	A	D	D	A
1-n-hexene	B	A	D	D	A
Hexylalcohol	A	B	-	C	A
Houghto-Safe 241 (water/glycol,HCF)	A	B	B	A	A
Houghto-Safe 620 (water/glycol, HCF)	A	B	B	A	A
Houghto-Safe 1010 (phosphate ester, HFD-R)	D	A	C	A	A
Houghto-Safe 1055 (phosphate ester, HFD-R)	D	A	C	A	A
Houghto-Safe 1120 (phosphate ester, HFD-R)	D	A	C	A	A
Houghto-Safe 5040 (water/oil emulsion)	A	A	C	D	A
Hydraulic fluid (mineral oil based)	A	A	B	D	A
Hydrazine	B	B	B	A	A
Hydrobromic acid	D	A	D	A	A
Hydrobromic acid 40%	D	A	D	A	A
Hydrochloric acid 3-molar concentrated	C	A	D	A	A
Hydrochloric acid 3-molar concentrated	D	A	D	C	A
Hydrocyanic acid	B	A	C	A	A
Hydrocyanic acid ≤65% cold	C	A	D	A	A1
Hydrocyanic acid > 65% cold	D	A	D	C	B
Hydrocyanic acid ≤65% hot	D	C	D	D	B
Hydrocyanic acid >65% hot	D	C	D	D	A
Hydrofluosilicic acid	B	A	D	A	B

	O-rings resistance to fluids				
	NBR	FKM	MVQ	EPDM	FFKM
Hydrogen fluoride (hydrofluoric acid, anhydrous)	D	D	D	A	B
Hydrogen gas hot	A	A	C	A	A
Hydrogen gas dilute	A	A	C	A	A
90%	D	A	B	C	A
Hydrogen peroxide dilute	B	A	A	-	A
Hydrogen sulphide dry, cold	A	D	C	A	A
Hydrogen sulphide dry, hot	D	D	C	A	A
Hydrogen sulphide moist, cold	D	D	C	A	A
Hydrogen sulphide moist, hot	C	B	D	D	A
Hydroquinone	B	D	D	A	A
Hydyn					
<b>I</b>					
Iodine	B	A	-	B	A
Iodine pentafluoride	D	D	D	D	B
Iron chloride	A	A	B	A	A
Iron nitrate	A	A	B	A	A
Isobutyl alcohol (isobutanol)	B	A	A	A	A
Isobutyl-n-butyrate	D	A	-	A	A
Isododecane	A	A	D	D	A
Iso-octane	A	A	D	D	A
Isophoron (Ketone)	D	D	D	A	A
Isopropanol (isopropyl alcohol)	B	A	A	A	A
Isoproyl benzene	D	A	D	D	A
Isoproyl chloride	D	A	D	D	A
Isopropylacetat	D	D	D	B	A
Isopropylacetate	B	D	D	D	A
Isopropylalkohol (isopropanol)	B	A	A	A	A
<b>J</b>					
JP 3 (MIL-J-5624)	A	A	D	D	A
JP 4 (MIL-J-5624)	A	A	D	D	A
JP 5 (MIL-J-5624)	A	A	D	D	A
JP 6 (MIL-J-5624)	A	A	D	D	A
JP X (MIL-F-2564)	A	D	D	D	-
<b>K</b>					
Kaliumcyanide	A	A	A	A	A
Kerosene	A	D	D	D	-
<b>L</b>					
Lactams	D	D	-	B	A
Lactic acid cold	A	A	B	A	A
Lactic acid hot	D	A	B	D	A
Lard, animal fat	A	A	B	B	A
Lavender oil	B	A	D	D	A
Lead acetate (sugar of lead)	B	D	D	A	B
Lead nitrate	A	A	B	A	B
Lead sulphate	B	A	B	A	A
Light crude oil (crude benzene)	A	A	D	D	A
Light lubricants	A	A	D	D	A
Lime milk	A	A	B	A	A

	O-rings resistance to fluids						O-rings resistance to fluids					
	NBR	FKM	MVQ	EPDM	FFKM		NBR	FKM	MVQ	EPDM	FFKM	
Linoleic acid	B	B	B	D	A							
Linseed oil	A	A	A	C	A		B	A	D	D	A	
Liquid gas (Propane, Butane, Propylene)	A	A	C	D	A		D	A	D	D	A	
Liquimoly	A	A	D	D	A		B	A	D	D	A	
Lubricating oils di-ester based	B	A	D	D	A		Natural gas	A	A	A	D	A
Lubricating oils petroleum based	A	A	D	D	A		n-Butyl benzoate	D	A	—	A	A
Lubricating oils SAE 10, 20, 30, 40, 50	A	A	C	D	A		Neat's foot oil	A	A	B	B	A
<b>M</b>							Neon	A	A	A	A	A
Magnesium chloride	A	A	A	A	A		Neville and Winther's acid	D	A	D	B	A
Magnesium hydroxide	B	A	A	A	A		Nickel acetate	B	D	D	A	A
Magnesium sulphate	A	A	A	A	A		Nickel chloride	A	A	A	A	A
Maize oil	A	A	A	C	A		Nickel sulphate	A	A	A	A	A
Malathion (insecticide)	B	A	D	D	A		Nitrobenzene	D	B	D	D	A
Malic acid	A	A	D	D	A		Nitroethane	D	A	D	B	A
Malic acid anhydrous	D	D	—	B	A		Nitrogen	A	A	A	A	A
Mercury	A	A	A	A	A		Nitromethane	D	A	D	B	A
Mercury chloride	A	A	A	A	A		Nitropropane	D	A	D	B	A
Mercury vapour	A	A	A	A	A		Nitrotoluene (40% + dinitrotoluene 60% mix)	D	C	D	D	A
Mesityl oxide (ketone)	D	D	D	B	A		Non-mineral oil base brake fluid	C	D	C	A	A
Methacrylic acid	D	C	D	B	A		n-propyl acetone	D	D	D	A	A
Methane	A	A	D	D	A		<b>O</b>					
Methyl 2-Methyl pentane	A	A	D	D	A		Octachlorotoluene	D	A	D	D	A
Methyl 3-Methyl pentane	A	A	D	D	A		Octadecane	A	A	D	D	A
Methyl acetate	D	D	D	B	A		Octyl alcohol	B	A	B	A	A
Methyl aceto acetate	D	D	B	B	A		Oleic acid	C	B	D	D	A
Methyl aceto acetate alcohol (methanol)	A	D	A	A	A		Oleum (fuming sulphuric acid)	D	A	D	D	A
Methyl aceto acetate bromide	B	A	D	D	A		Olive oil	A	A	A	B	A
Methyl aceto acetate butyl ketone	D	D	D	A	A		Ortho-chloroethyl benzene	D	A	D	D	A
Methyl aceto acetate carbonte	D	A	D	D	A		Orthochlorophenol	D	A	D	D	A
Methyl aceto acetate cellulose	B	D	B	B	A		Ortho-dichlorobenzene	D	A	D	D	A
Methyl aceto acetate chloride	D	A	D	C	A		Ortho-n-octane	B	A	D	D	A
Methyl aceto acetate chloroform	D	A	D	D	A		Oxalic acid	B	A	B	A	A
Methyl aceto acetate ether (dimethyl ether)	A	A	A	A	A		Oxygen, liquid	D	D	D	D	A1
Methyl aceto acetate ethyl ketone (butanon, MEK)	D	D	D	A	A		Ozone	D	A	A	A	A1
Methyl aceto acetate ethyl ketone peroxide	D	D	B	D	A1		<b>P</b>					
Methyl aceto acetate glycol	C	D	D	B	A		Paint thinners	D	D	D	D	A
Methyl aceto acetate isobutyl ketone (MIBK)	D	D	D	C	A		Paints	B	A	D	D	A
Methyl aceto acetate methacrylate	D	D	D	D	A1		Palmitic acid	A	A	D	B	A
Methyl aceto acetate oleate	D	A	—	B	A		n-pentane	A	A	D	D	A
Methylaniline	D	B	—	D	A		Perchloric acid 2-molar	D	A	D	B	A
Methylcyclopentane	D	A	D	D	A		Petrol	A	A	D	D	A
Methylene chloride (dichloromethane)	D	B	D	D	A		Phenol	D	A	D	D	A
Methylisopropylketone	D	D	D	B	A		Phenyl ethyl ether	D	D	D	D	A
Metilacrilato	D	D	D	B	A		Phenylhydrazine	D	A	D	D	A
Milk	A	A	A	A	A		Phoron	D	D	D	A	A
Mineral oils	A	A	B	D	A		Phosphate of calcium	A	A	A	A	A
Mixed amines	D	D	B	B	A1		Phosphoric acid 3-molar aqueous solution	D	A	B	A	A
Molten sulphur	D	A	C	C	A		Phosphoric acid, 3- molar concentrated molten	D	A	C	B	A
Monochlorobenzene (chlorobenzene)	D	A	D	D	A		Phosphoric acid, 3- molar Phosphorous chloride	D	A	D	A	A
Mopar brake fluid	C	D	C	A	A		Picric acid aqueous solution	A	A	B	A	A

## O-RINGS RESISTANCE TO FLUIDS

	O-rings resistance to fluids				
	NBR	FKM	MVQ	EPDM	FFKM
Picric acid molten	B	A	D	B	B
Pine oil	A	A	D	D	A
Pinene	B	A	D	D	A
Piperidine	D	D	D	D	A1
Polyvinyl acetate emulsion	-	-	-	A	A
Potassium acetate	B	D	D	A	A
Potassium chloride	A	A	A	A	A
Potassium copper ferricyanide	A	A	A	A	A
Potassium dichromate	A	A	A	A	A
Potassium hydroxide solutions (dilute)	B	B	B	A	A
Potassium hydroxide caustic potash 50%	B	B	D	C	A
Potassium nitrate	A	A	A	A	A
Potassium sulphate	A	A	A	A	A
Potassium sulphite	A	A	A	A	A
Prestune antifreeze	A	A	A	A	A
Propane	A	A	D	D	A
Propionitrile	A	A	D	D	A
Propyl acetate	D	D	D	B	A
Propyl alcohol (Propanol)	A	A	A	A	A
Propyl nitrate	D	D	D	B	A
Propylene	D	A	D	D	A
Propylene oxide	D	D	D	B	A1
Pyradine	D	D	D	B	A
Pyranol, transformer oil (postchlorinated biphenylene)	A	A	D	D	A
Pyrolube	D	A	B	B	-
Pyrrole	D	D	B	D	A
<b>R</b>					
Radioactive radiation	C	D	C	C	-
Rape oil	A	A	D	A	A
<b>S</b>					
Salicylic acid	B	A	A	A	A
Salts of ammonium	A	B	B	A	A
Salts of ammonium barium	A	A	A	A	A
Salts of ammonium calcium	A	A	B	A	A
Salts of ammonium copper	A	A	A	A	A
Salts of ammonium magnesium	A	A	A	A	A
Salts of ammonium nickel	A	A	A	A	A
Salts of ammonium potassium	A	A	A	A	A
Salts of ammonium sodium	A	A	A	A	A
Salts of ammonium zinc	A	A	A	A	A
Seawater containing chlorine and salt	D	A	D	D	A
Seawater containing chlorine and salt salt water	A	A	A	A	A
Silicate ester	B	A	D	D	A
Silicone greases	A	A	D	A	A
Silicone oil	A	A	D	A	A
Silver nitrate	B	A	A	A	A
Soda (sodium carbonate)	A	A	A	A	A
Soapy water	A	A	A	A	A
Sodium acetate	B	D	D	A	A
Sodium borate (Borax)	A	A	A	A	A

	O-rings resistance to fluids				
	NBR	FKM	MVQ	EPDM	FFKM
Sodium carbonate (soda)	A	A	A	A	A
Sodium chloride	A	A	A	A	A
Sodium cyanide	A	A	A	A	A
Sodium met phosphate (Colon)	A	A	-	A	A
Sodium hydroxide (caustic soda) 3 molar	B	B	A	A	A
Sodium hypochlorite	C	A	C	C	A
Sodium met silicate	A	A	-	A	A
Sodium nitrate (saltpetre)	B	A	D	A	A
Sodium perforate	B	A	B	A	A
Sodium peroxide	B	A	D	A	A
Sodium phosphate primary	A	A	D	A	A
Sodium phosphate tertiary	A	A	A	A	A
Sodium sulphate (Gluer's salt)	A	A	A	A	A
Sodium sulphide	A	A	A	A	A
Sodium sulphite	A	A	A	A	A
Sodium thiosulphate (fixer)	B	A	A	A	A
Soya oil	A	A	A	C	A
Stannic chloride	A	A	B	A	A
Stannic 50%	A	A	B	A	A
Stannous Chloride	A	A	B	A	A
Steam below 150°C	D	C	C	A	A
Steam above 150°C	D	D	D	B	A
Satiric acid	B	A	B	B	A
Styrene (monomer)	D	B	D	D	A1
Sugar cane solution	A	A	A	A	A
Sugar solutions	A	A	A	A	A
Sugar-beet juice	A	A	A	A	A
Sulphur	D	A	B	A	A
Sulphur chloride D	A	C	D	D	A
Sulphur dioxide aqueous	D	D	B	A	A
Sulphur dioxide dry	D	D	B	A	A
Sulphur dioxide liquid under pressure	D	D	B	A	A
Sulphur hexafluoride	B	C	B	A	B
Sulphur trioxide, dry	D	A	B	B	A
Sulphuric acid 3-molar	D	A	D	B	A
Sulphuric acid concentrated	D	A	D	D	A
Sulphuric acid fuming (20/25% oleum)	D	A	D	D	A
Sulphurous acid	B	A	D	B	A
Super grade petrol	A	A	D	D	A
<b>T</b>					
Tar (bituminous)	B	A	B	D	A
Tartaric acid	A	A	A	B	A
Tetrabromethane	D	A	D	D	A
Tetrabutyl titanate	B	A	-	A	A
Tetrachloroethylene (perchloroethylene dry cleaning fluid)	B	A	D	D	B
Tetraethyl lead	B	A	D	D	A
Tetraethyl chips	B	A	D	D	A
Tetrahydrofurane	D	D	D	B	A
Tetraline	D	A	D	D	A
Titanium (IV) chloride	B	A	D	D	A
Toluene	D	A	D	D	A

	O-rings resistance to fluids						O-rings resistance to fluids				
	NBR	FKM	MVQ	EPDM	FFKM		NBR	FKM	MVQ	EPDM	FFKM
Toluylene diisocyanate	D	D	D	B	A	X					
Transformer oil	A	A	B	D	A	Xenon					
Transmission fluid type A	A	A	B	D	A	Xylene					
Triaryl phosphate	D	A	C	A	A	Xyldine (mixture of aromatic amines)					
Tributoxyethyl phosphate	D	A	-	A	A	Z					
Tributyl mercaptan	D	A	D	D	A	Zeolites					
Tributyl phosphate	D	D	D	A	A	Zinc acetate					
Trichloroacetic acid	B	C	C	A	A	Zinc acetate sulphate					
Trichloroethane	D	A	D	D	A	Zinc acetate chloride					
Trichloroethylene (Trilene)	D	A	D	D	A						
Trichlorometane (Chloroform)	D	A	D	D	A						
Triethanolamine	C	D	D	B	A1						
Trifluoroethane	D	A	D	D	B						
Trinitrotoluene	D	B	-	D	A						
Trioctyl phosphate	D	B	C	A	A						
Triothiocresylphosphate ("TOCP")	D	B	C	A	A						
Tripolyphosphate	D	B	C	A	A						
Tung oil (China wood oil)	A	A	D	D	A						
Turpentine	A	A	D	D	A						
<b>V</b>											
Vaseline	A	A	D	D	A	LEGEND					
Vegetable oils	A	A	A	C	A	A	Stable				
Vinegar (%% acetic acid)	B	A	A	A	A	B	Can be used				
Vinyl acetylene	A	A	B	A	A	C	Limited stability (use not recommended)				
<b>W</b>											
Waste water	A	A	A	A	A	D	Not stable				
Water (for industrial use) up to 70°C	A	B	A	A	A	-	Data not available				
Water (for industrial use) up to 100°C	B	B	B	A	A						
White oil	A	A	D	D	A						
White pine oil	B	A	D	D	A						
Wine and Whisky	A	A	A	A	A						
Wolman's salt (wood impregnation)	A	A	A	A	A						
Wood oil	A	A	D	D	A						
Wood vinegar	D	D	-	B	A						

The information on the following pages is based on tests under various different conditions. Many of the values have been determined at room temperature with a reaction time of 7 days (150 hours). In individual cases observations may differ between laboratory and practical tests. Because of differences in conditions of use and the composition of fluids the data given are only guidelines and should not be taken as binding. For these reasons we cannot give any guarantees as to the correctness of our recommendations in individual cases. If your operating conditions are unusual please feel free to discuss them with us.

## O-RINGS RESISTANCE TO FLUIDS

### GENERAL PRINCIPLES (O-RINGS)

The simple geometry is the main characteristic of an O-Ring which, in conjunction with proper elastomer selection results in a low cost, easy to use and efficient sealing system. Elastomeric materials, when compressed, react like a high viscosity fluid which transmits applied stress in every direction; consequently, the O-Ring serves as a barrier, blocking the leak paths between the sealing surfaces. Technical sealing has been defined by DIN Standards as follows:

- "Static seal" - The sealing action created between two mating surfaces with no leakage of liquid or minimal diffusion of gas;
- "Dynamic seal" - The mating surfaces have relative movement with minimal leakage of liquid (useful to protect the sealing efficiency, acting as lubricant).


O-Rings offer several advantages over other sealing systems: simplicity of construction, standardized seal dimensions, wide selection of materials, suitability for both static and dynamic applications, standard dimensioning of glands, low cost due to high volume manufacturing. Sealing is always achieved through a positive compression or squeezing action, resulting in a deformation of the O-Ring cross-section. The most important sealing characteristic of an O-Ring is its resistance to compression set or residual deformation.

### DETERMINATION OF THE MATERIALS GROUP

#### NBR (Acrylonitrile butadiene elastomer):

This material is the most often used in sealing technology because of its good resistance to the majority of mineral oilbased oils and greases. Its normal temperature range is between -30°C and +100°C, with short periods at +130°C. Special NBR compounds can be used as low as -55°C. The acrylonitrile content may be between 18% and 50%. The most common proportion is 28% to 38%. As this proportion rises the resistance to minerals oils and greases increases, but at the same time the flexibility and low-temperature resistance reduces. The compression set rises as the acrylonitrile content increases.

### Maximum and minimum admissible working temperatures for o-rings

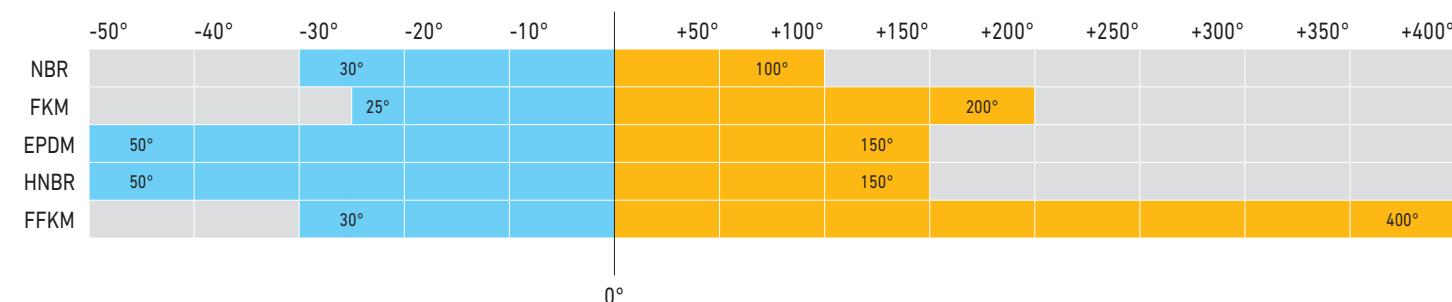

#### FKM (Fluoroelastomer)

FKM has an outstanding resistance to high temperatures, ozone, chemicals and weathering. The operating range is up to +200°C, and +250°C for brief periods. FKM is highly resistant to almost all synthetic hydraulic fluids and those based on mineral oils. FKM is less suitable for use in hot water, steam and at low temperatures. Their low-temperature flexibility is only slight and their resistance to hot water and steam is moderate. Special materials should be selected for these applications.

#### MVQ (Silicone elastomer)

The principal feature of MVQ is its wide temperature range. Its very good low-temperature flexibility, good ozone resistance and good electrical properties are other advantages. Its gas permeability is not as good as that of other elastomers. Operating temperatures are between -60°C and +200°C, up to +250°C for short periods.

#### EPDM (Ethylene-propylene diene elastomer)

EPDM elastomers have a very good resistance to ozone, ageing and weathering, also to water, hot water and steam. They are not resistant to mineral oils and greases. Their compatibility with chemicals is good. Operating temperatures are between -40°C and +160°C, up to +180°C for short periods.

#### FFKM (Perfluoroelastomer)

FFKM has almost the same chemical resistance as RPTFE, plus elastic properties of the fluoroelastomer FKM, and it also has outstanding resistance to high temperatures, ozone, weathering and ageing. The range of service temperatures goes up to +315°C and +350°C for short periods. In the temperature range above +200°C FFKM has a very low and constant compression set.

## CAPACITY COEFFICIENT

TEST WITH WATER AT 20°C		
DN FB	CV (G.P.M.)	KV (m³/h)
6	5	4.27
10	7	6
13	35	30.2
20	61	53.7
25	105	90.66
32	210	176.5
40	285	245.2
50	425	364.52
65	750	645.4
80	1038	889.5
100	NR	NR

## DETERMINATION OF THE NOMINAL DIAMETER

We recommend to use the following oil rate as guide line:

Suction pipes:

- 0.5...0.8 m/sec

Return pipes:

- 2...4 m/sec

Pressure pipes up to 10 MPa:

- 2...4 m/sec

Pressure pipes up to 50 MPa:

- 3...12 m/sec


This diagram provides a guide for the determination of the nominal diameter (DN)

### EXAMPLE 1:


A velocity  $v = 8 \text{ m/sec}$

and a flow rate of  $Q = 150 \text{ l/min}$  have been selected.

The straight line linking these two values on the outer scales intersects the nominal diameter DN20 on the middle scale.

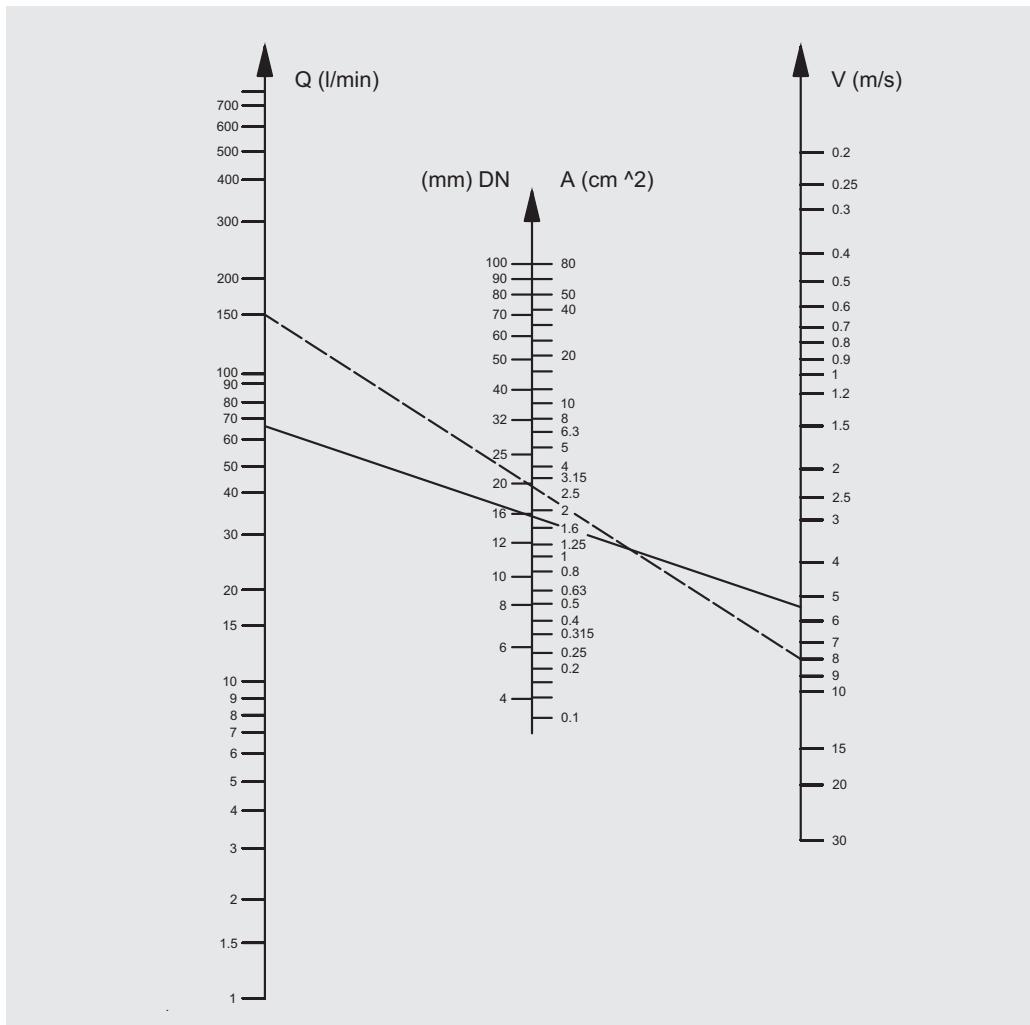

## ■ TORQUE MOMENT

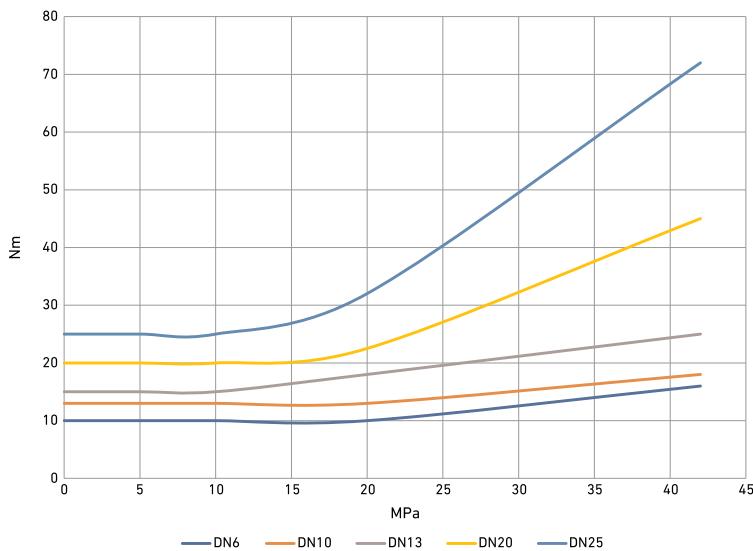

## ■ TORQUE MOMENT

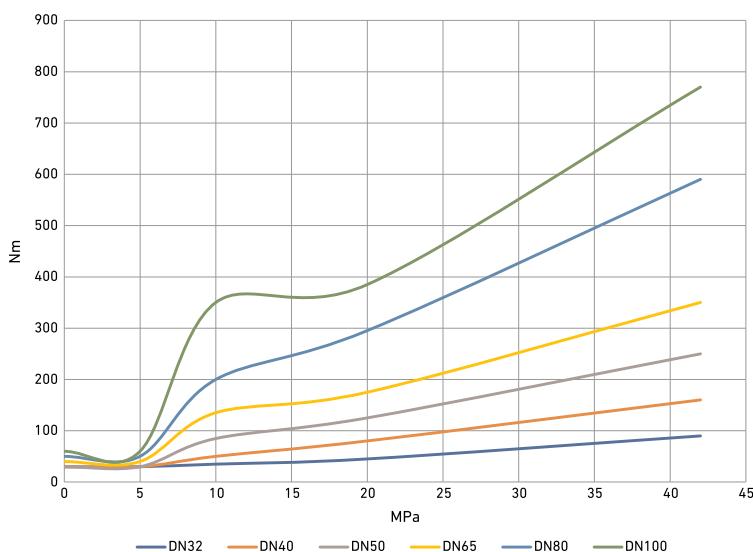


Diagram for the determination  
of the nominal diameter





**GEMELS S.P.A.**

Via Gambirasio, 20/22  
24069 Trescore Balneario (Bergamo) - ITALY  
tel. (+39) 035 940 445 fax. (+39) 035 945 205  
[gemels@gemels.it](mailto:gemels@gemels.it)

**GEMELS NORTH AMERICA INC.**

775 Dillon Drive, Wood Dale, IL 60191 USA  
tel. (+1) 630 422 3119  
[northamerica@gemels.com](mailto:northamerica@gemels.com)

